



Anima

Stone Collection

P O R C E L A I N T I L E S



Anima - Diamond Black

Anima

Stone Collection

By combining the intricacies of hewn stone with the subtle veining found in marble, Anima provides a unique option within our Stone Collection. With its high variation of shade and tone within each slab, Anima has the character to add texture to minimalist projects and interest to larger open spaces. Anima offers unrivalled practicality with sizes and finishes, including an R11 rated Grip option. Delivering natural, long-lasting beauty, Anima provides a wonderfully elegant way to separate space, making it particularly suited to professional specifiers as well as for residential schemes.

3 COLOURS | 7 SIZES | 3 FINISH



Anima - Diamond Black



Anima
Diamond Black





Anima
Palladium Grey



Anima - Platinum White



Anima
Platinum White

Colours



Diamond Black



Palladium Grey



Platinum White


Colours

| COLOUR | FINISH | SIZE(MM) |
|---|------------|------------------|
| Platinum White | Natural | 1200 x 2700 x 6 |
| Platinum White | Natural | 1200 x 1200 x 6 |
| Diamond Black Palladium Grey Platinum White | Grip | 600 x 1200 x 20 |
| Diamond Black Palladium Grey Platinum White | Natural | 600 x 1200 x 8 |
| Diamond Black Palladium Grey Platinum White | Grip | 1000 x 1000 x 20 |
| Diamond Black Palladium Grey Platinum White | Natural | 1000 x 1000 x 6 |
| Diamond Black Palladium Grey Platinum White | Structured | 1000 x 1000 x 6 |
| Palladium Grey | Natural | 750 x 750 x 6 |
| Diamond Black Palladium Grey Platinum White | Grip | 600 x 600 x 20 |
| Diamond Black Palladium Grey Platinum White | Natural | 600 x 600 x 8 |
| Diamond Black Palladium Grey Platinum White | Structured | 600 x 600 x 8 |
| Diamond Black Palladium Grey Platinum White | Natural | 300 x 600 x 8 |



Anima - Diamond Black & Platinum White

Size Guide (mm)

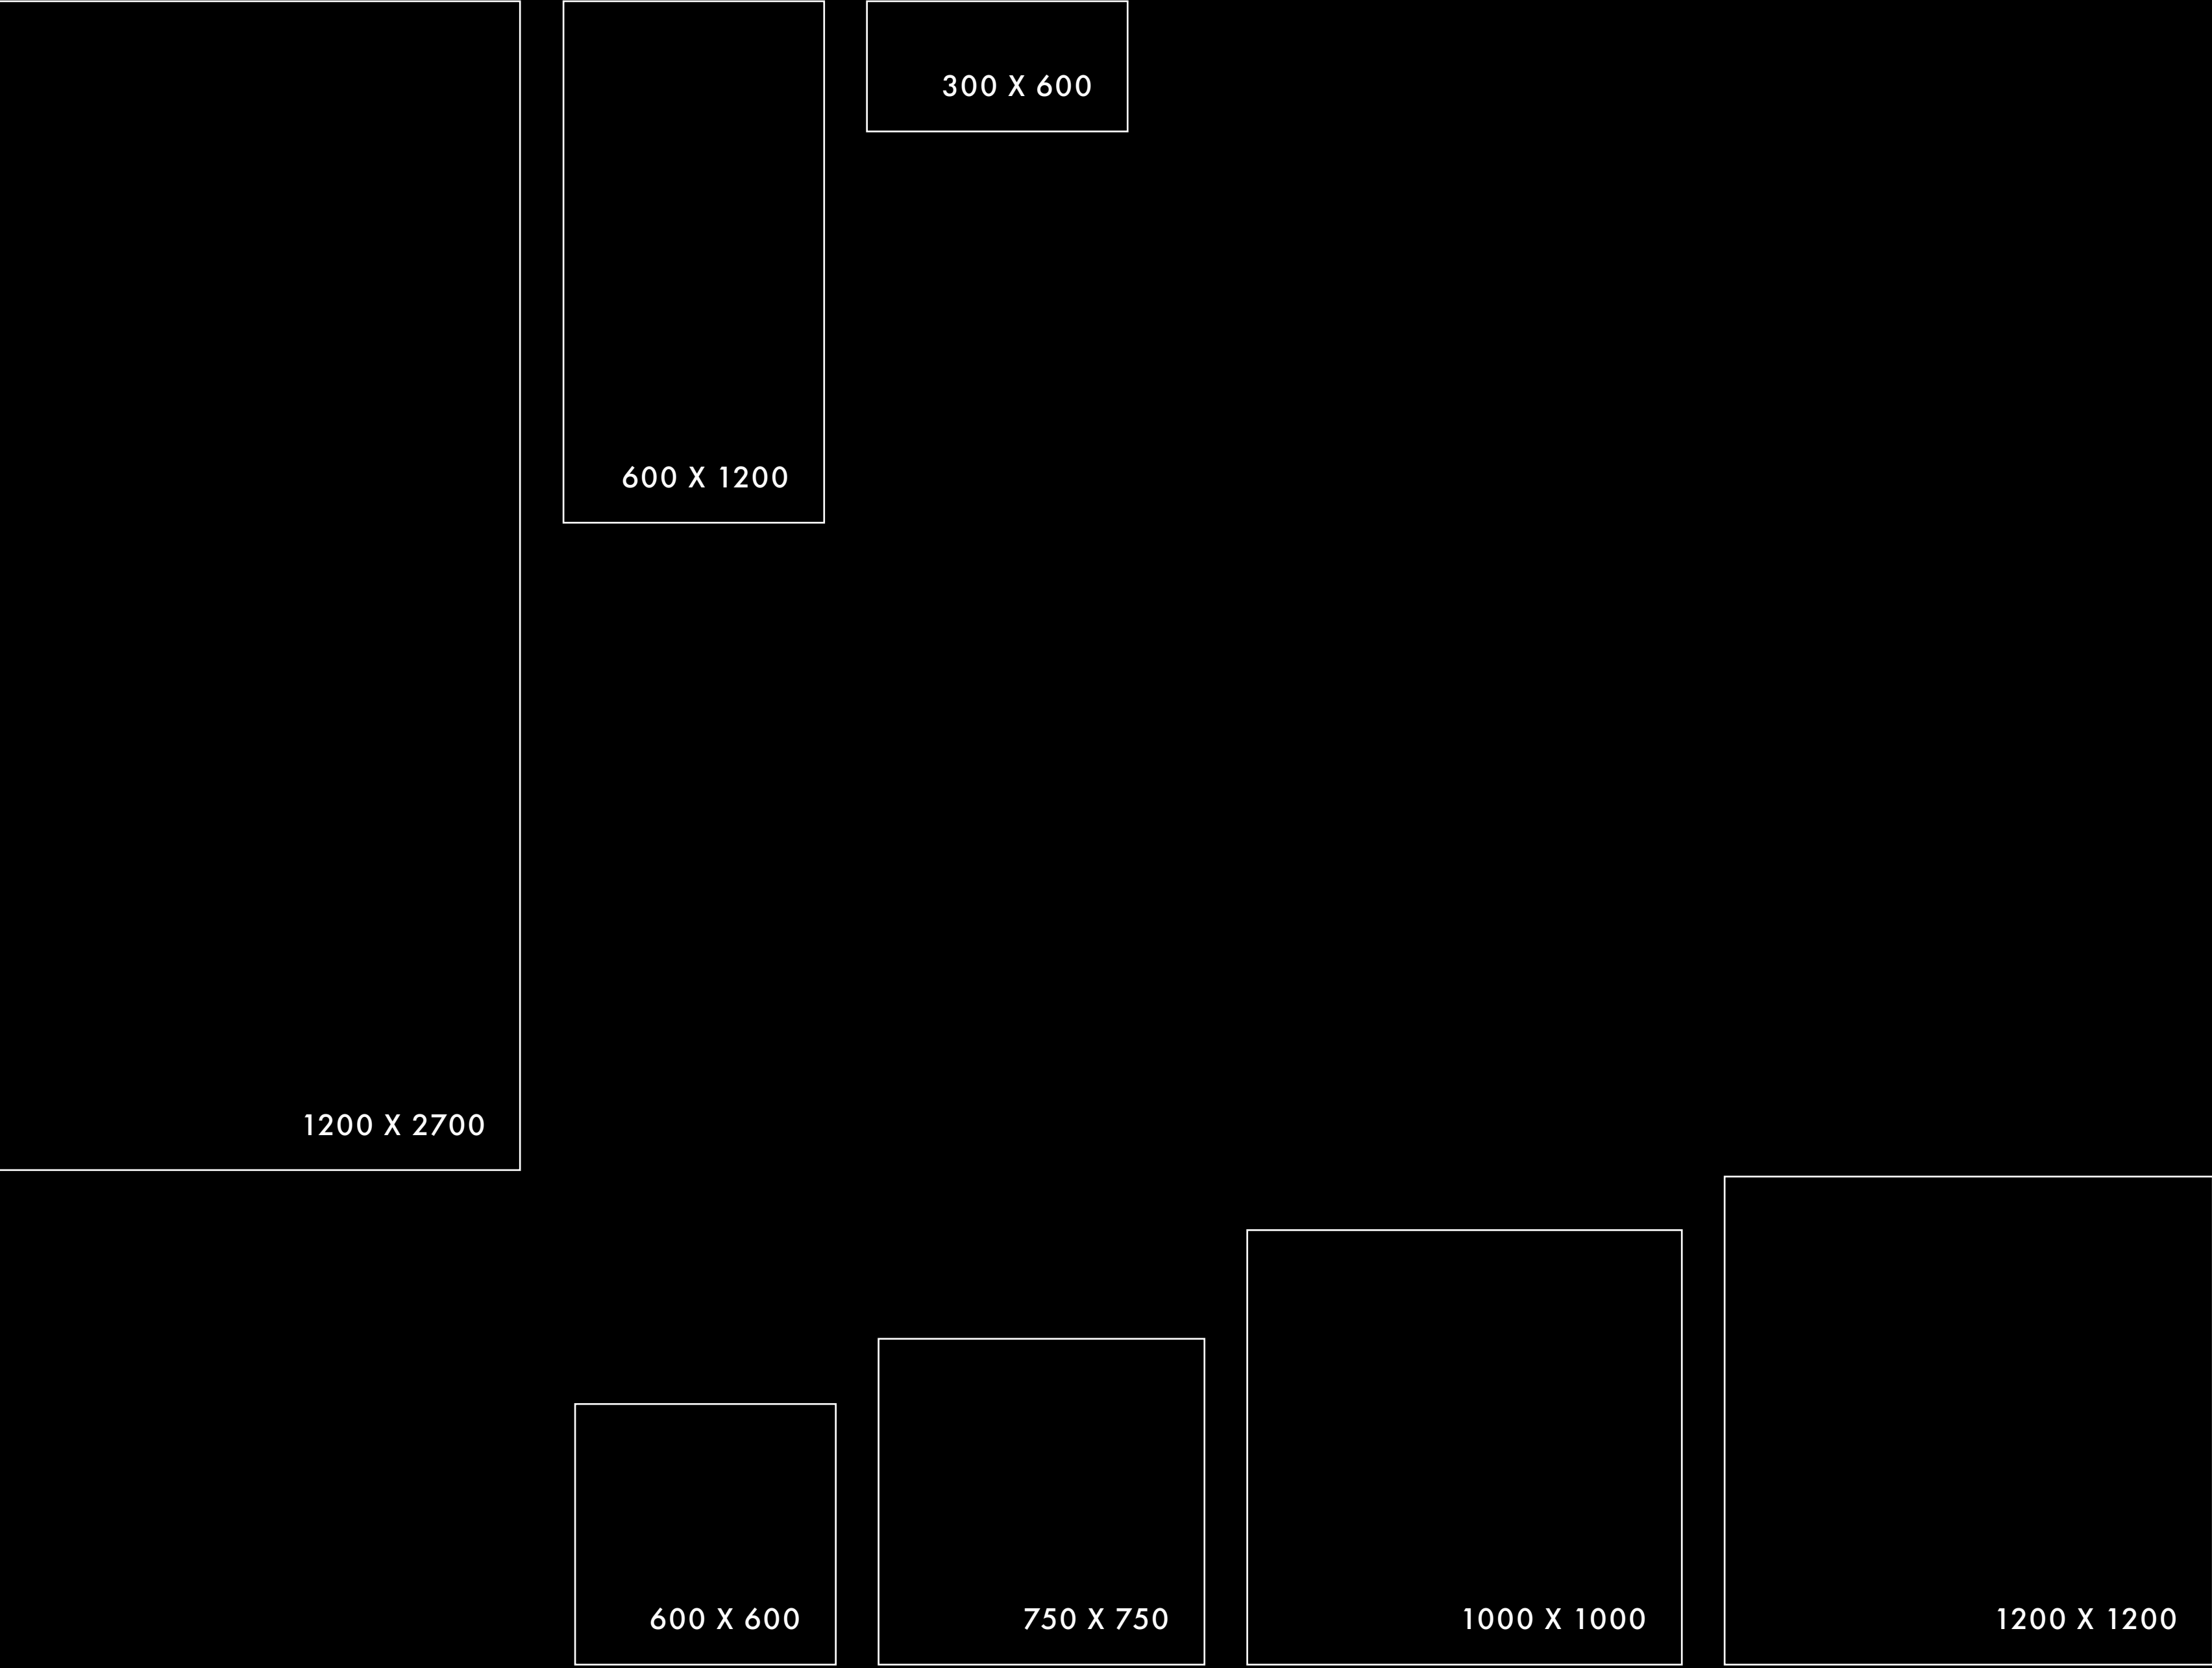



Anima - Palladium Grey & Palladium Grey Mosaic

Special Pieces

| COLOUR | FINISH | SIZE(MM) | DETAIL |
|---|---------|---------------|------------------|
| Diamond Black Palladium Grey Platinum White | Natural | 65 x 1000 x 6 | Skirting Tile |
| Diamond Black Palladium Grey Platinum White | Natural | 65 x 750 x 6 | Skirting Tile |
| Diamond Black Palladium Grey Platinum White | Natural | 70 x 600 x 8 | Skirting Tile |
| Diamond Black Palladium Grey Platinum White | Natural | 300 x 300 x 8 | Mosaic (31x31mm) |
| Diamond Black Palladium Grey Platinum White | Natural | 300 x 300 x 8 | Mosaic (47x47mm) |



Technical Details


| PHYSICAL PROPERTIES | STANDARD OF TEST | REQUIRED VALUE | MANUFACTURERS MEAN VALUES |
|---|------------------|---|---------------------------|
| Length And Width | ISO 10545-2 | ± 0.6% Max | ± 0.2% |
| Thickness | ISO 10545-2 | ± 5% Max | ± 5% |
| Linearity | ISO 10545-2 | ± 0.5% Max | ± 0.2% |
| Wedging | ISO 10545-2 | ± 0.6% Max | ± 0.2% |
| Warpage | ISO 10545-2 | ± 0.5% Max | ± 0.2% |
| Water Absorption | ISO 10545-3 | ≤ 0.5 % | 0.05% |
| Deep Abrasion Resistance | ISO 10545-6 | ≤ 175 Mm ³ | 140 Mm ³ |
| Coefficient Of Linear Thermal Expansion | ISO 10545-8 | Testing Method Available | On Request |
| Resistance To Thermal Shocks | ISO 10545-9 | Testing Method Available | Resistant |
| Frost Resistance | ISO 10545-12 | No Sample Must Show Alterations To Surface | Frost Resistant |
| Resistance To Chemical Products | ISO 10545-13 | No Sample Must Show Visible Signs Of Chemical Attack (Acids, Bases, Additives For Pools) Except For Products Containing Hydrofluoric Acid And Derivatives | Unaffected |
| Stain Resistance | ISO 10545-14 | Testing Method Available | Resistant To Stain |



Anima - Platinum White

Shade Tone Variance

Shade, texture and tone can vary from piece to piece within a single tile production run. V1 shade tone variation has little or no change from piece to piece where a V4 might have a substantial variety of shade, texture and tone variation.

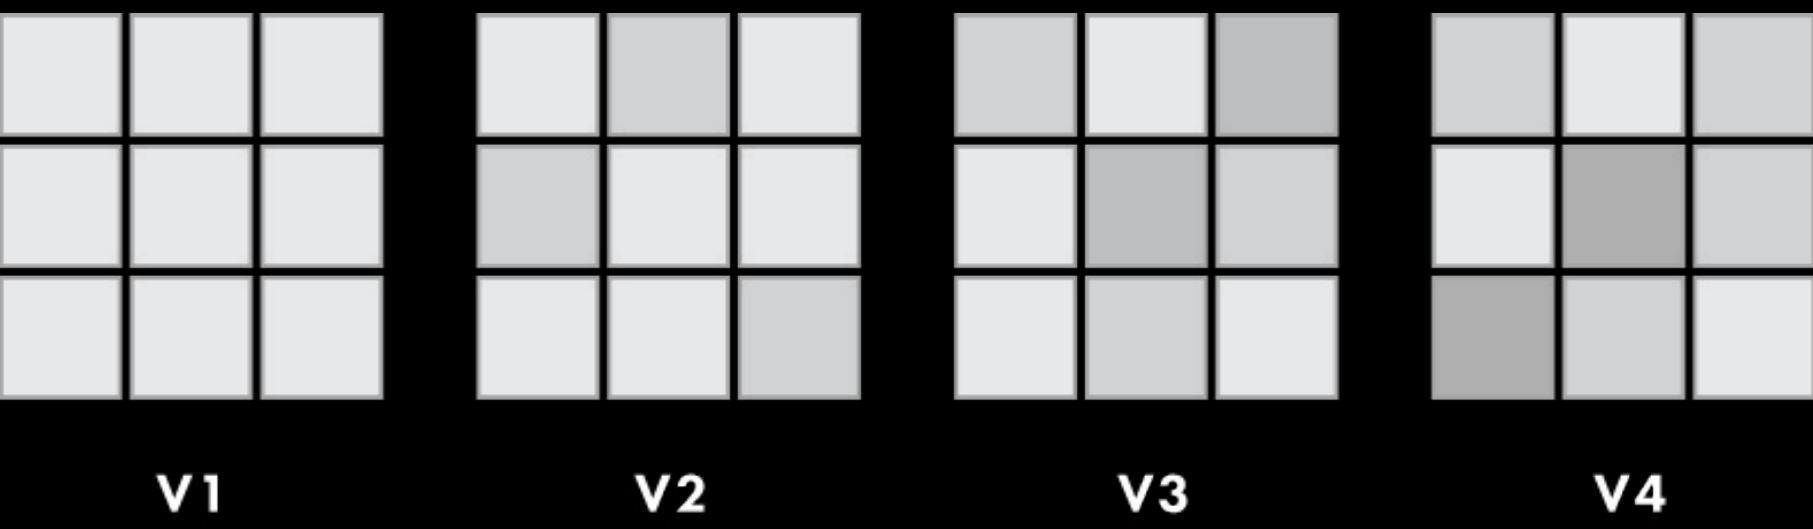

| Variance Rating | Description |
|-----------------|-----------------------|
| V1 | Uniform Appearance |
| V2 | Slight Variation |
| V3 | Moderate Variation |
| V4 | Substantial Variation |

| Colour | Variance |
|----------------|----------|
| Diamond Black | V3 |
| Palladium Grey | V3 |
| Platinum White | V3 |

Ramp Test Values (DIN 51130)

DIN Standard Ramp Testing (DIN 51130) is an alternative to Pendulum Testing and generally categorised as an ‘off-site’ activity because of the size and complexity of the equipment required to carry out the test. The Slip Resistance Values (RSV) are factory gate values (based on supplied tiles) and categorised using the Ramp Test (DIN 51130) method which is commonly used by European factories. In this method, a lubricated inclined platform is adjusted to a gradually increasing gradient, and the angle is measured at which a person walking on it slips.

| R Rating Value | Friction |
|----------------|-----------|
| R9 | Minimal |
| R10 | Normal |
| R11 | Good |
| R12 | Good |
| R13 | Very High |

| Colour | Finish/Style | R Rating Value | Friction |
|----------------|--------------|----------------|----------|
| Diamond Black | Grip | R11 | Good |
| Diamond Black | Natural | R10 | Normal |
| Diamond Black | Structured | R11 | Good |
| Palladium Grey | Grip | R11 | Good |
| Palladium Grey | Natural | R10 | Normal |
| Palladium Grey | Structured | R11 | Good |
| Platinum White | Grip | R11 | Good |
| Platinum White | Natural | R10 | Normal |
| Platinum White | Structured | R11 | Good |

Environmental Certification



LEED® certification provides independent, third party verification that a building project meets the highest green building and performance measure. All certified projects receive a LEED® plaque, which is nationally recognised symbol demonstrating that a building is environmentally responsible, profitable and a healthy place to live and work. The environmental characteristics have been evaluated and found according to the requirements of content of recycled material for environmental assessment according to LEED® criteria. These products contribute to the increase in the LEED® rating of buildings where they are used.



The EU Ecolabel helps you identify products and services that have a reduced environmental impact throughout their life cycle, from the extraction of raw material through to production, use and disposal. Recognised throughout Europe, EU Ecolabel is a voluntary label promoting environmental excellence which can be trusted. Ecolabel certification applies to building products such as ceramic tiles for residential and public flooring and wall-covering. The commission in charge of the certification system measures the environmental impact caused by the entire productive cycle; in the case of ceramic tiles, the verification starts from raw material quarrying through to manufacturing, distribution, installation and their final disposal. Our factories conform and are certified by the European Community standard Ecolabel and the production process is in complete harmony with the Ecolabel certification.



GREENGUARD Certification ensures that a product meets stringent standards for minimal emissions of volatile organic compounds (VOCs) into indoor air. This program provides assurance that products designed for indoor use adhere to strict chemical emissions limits, fostering the creation of healthier interiors. Manufacturers with GREENGUARD Certification gain credibility for their sustainability claims, supported by empirical technical data from an unbiased third-party organisation. The GREENGUARD Certification Program instills confidence by ensuring that indoor products meet strict chemical emissions limits, contributing to the creation of healthier interior spaces. This empowers manufacturers to produce and customers to identify products with low chemical emissions, thereby supporting air quality and environmental well-being.



NSF® has facilitated the development of more than 75 standards and protocols for sanitary food equipment, and has certified thousands of products as safe to use in restaurant and commercial kitchen settings. NSF® food equipment standards include requirements for material safety, design, construction and product performance. The products conform to the requirements of NSF/ANSI Standard 51 – Food Equipment Materials. NSF/ANSI 51 establishes minimum public health and sanitation requirements for materials and finishes used in the manufacture of commercial foodservice equipment.



An Environmental Product Declaration (EPD) is a concise document that transparently communicates the environmental performance of a product throughout its life cycle. It provides comprehensive information about the product's environmental impact, including aspects such as raw material extraction, production processes, energy consumption, and emissions. EPDs are based on standardised methodologies and enable consumers, businesses, and policymakers to make informed decisions by considering the environmental aspects of a product in a systematic and comparable way.

P O R C E L A I N T I L E S

North London Showroom
23 Temple Fortune Parade
Finchley Road
London NW11 0QS
020 3141 3337

www.porcelaintiles.co.uk

South London Showroom
88 High Street Wimbledon
London SW19 5EG
020 3141 3337

enquiry@porcelaintiles.co.uk