



Contesto

Stone Collection

P O R C E L A I N T I L E S



Contesto

Stone Collection

With an enigmatic charm and Scandinavia character all of its own, Contesto is a contemporary stone-effect collection of five complementary shades. A uniform colour, large format and low variance rating, make Contesto ideal for installation over large surface areas for an uninterrupted and minimalist look with minimal grout lines. Contesto can also be used for cladding walls or fixed to any vertical or horizontal surface, producing an easy to install continuous design. While the environment and technical benefits of porcelain, ensure that Contesto provides a sustainable and low-maintenance aesthetic, suitable for any retail, public or residential space.

5 COLOURS | 3 SIZES | 1 FINISH



Contesto

Latte

Face 1

Face 2

Face 3

Face 4





Contesto

Cumin

Face 1

Face 2

Face 3

Face 4





Contesto

Flint


Face 1

Face 2

Face 3

Face 4



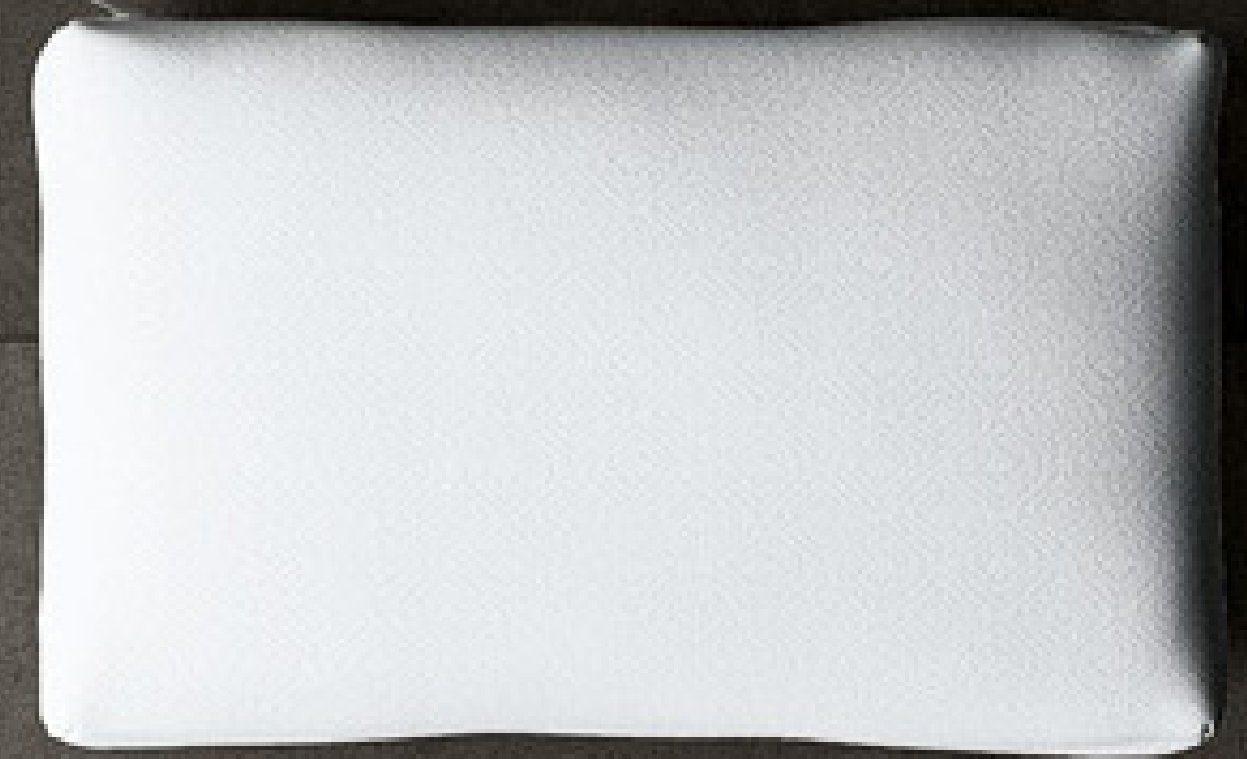

Contesto - Gunpowder

Contesto
Gunpowder

Face 1

Face 2

Face 3

Face 4





Contesto


Pepper

Face 1

Face 2

Face 3

Face 4

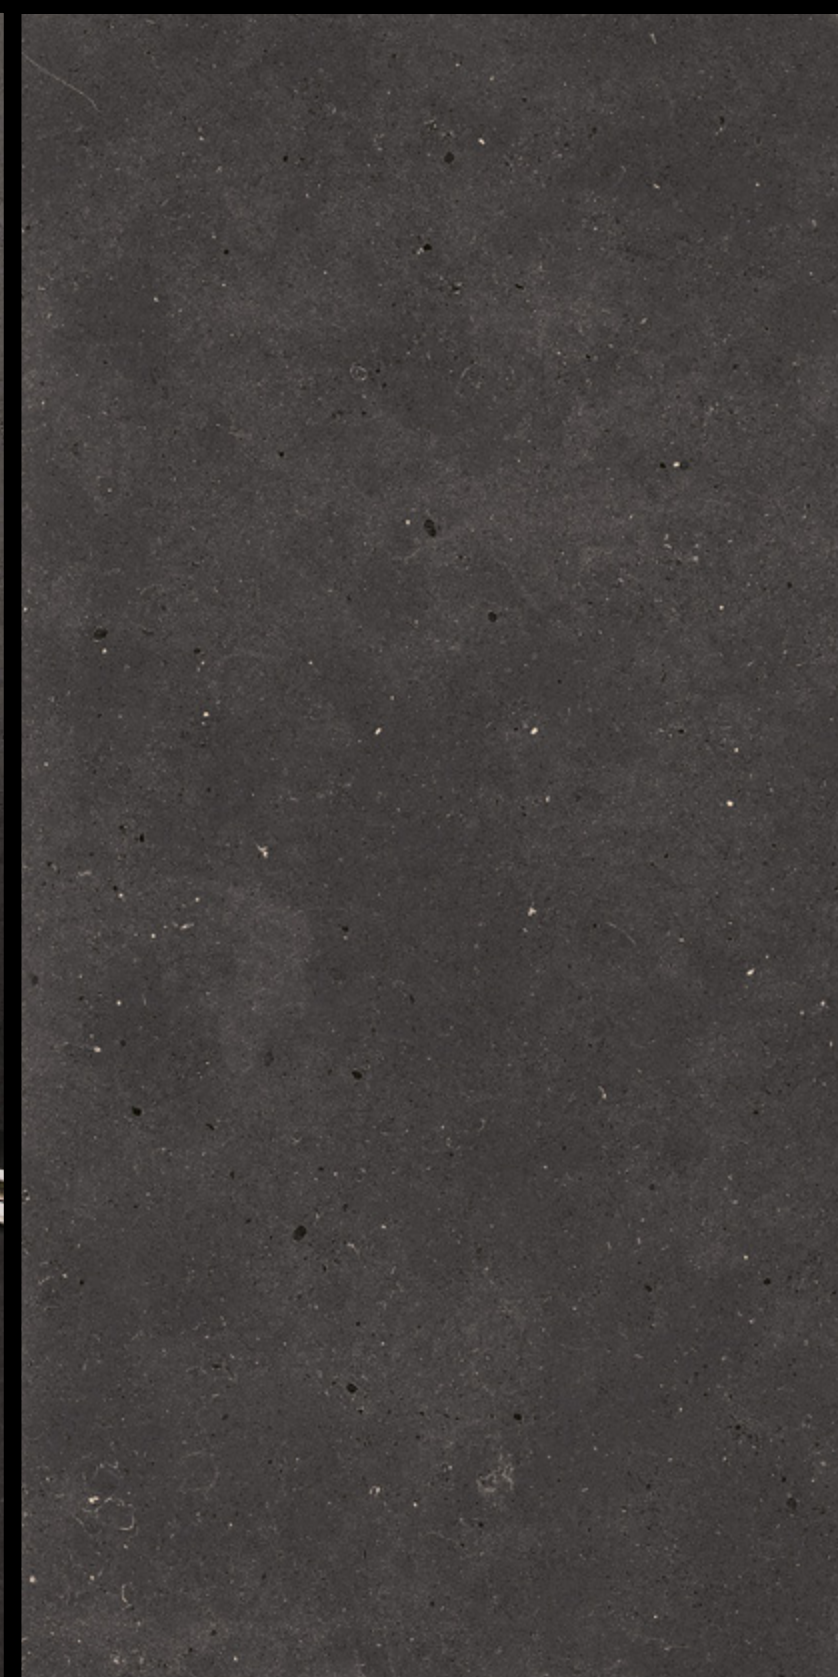

Colours



Latte



Cumin



Flint



Gunpowder



Pepper

Colours

COLOUR	FINISH	SIZE(MM)
Cumin Flint Gunpowder Latte Pepper	Natural	1000 X 3000 X 6
Cumin Flint Gunpowder Latte Pepper	Natural	1000 X 1500 X 6
Cumin Flint Gunpowder Latte Pepper	Natural	1000 X 1000 X 6

Size Guide (mm)

 <p>1000 X 3000</p>	 <p>1000 X 1500</p>	 <p>1000 X 1000</p>
---	--	--



Contesto - Gunpowder






Technical Details

PHYSICAL PROPERTIES	STANDARD OF TEST	REQUIRED VALUE	MANUFACTURERS MEAN VALUES
Length And Width	ISO 10545-2	±0.6%	Conforms
Thickness	ISO 10545-2	±5%	Conforms
Orthogonality	ISO 10545-2	±0.6%	Conforms
Flatness	ISO 10545-2	±0.5%	Conforms
Water Absorption	ISO 10545-3	≤ 0.5%	Conforms
Bending Strength	ISO 10545-4	>35N/Mm²	Conforms
Thermal Shock Resistance	ISO 10545-9	On Request	Resistant
Frost Resistance	ISO 10545-12	On Request	Resistant
Resistance To Chemical Attack	ISO 10545-13	According To Builder's Specifications	Resistant
Stain Resistance	ISO 10545-14	Test Method Available	Conforms
Slip Resistance	DIN 51130	-	R10

Shade Tone Variance

Shade, texture and tone can vary from piece to piece within a single tile production run. V1 shade tone variation has little or no change from piece to piece where a V4 might have a substantial variety of shade, texture and tone variation.

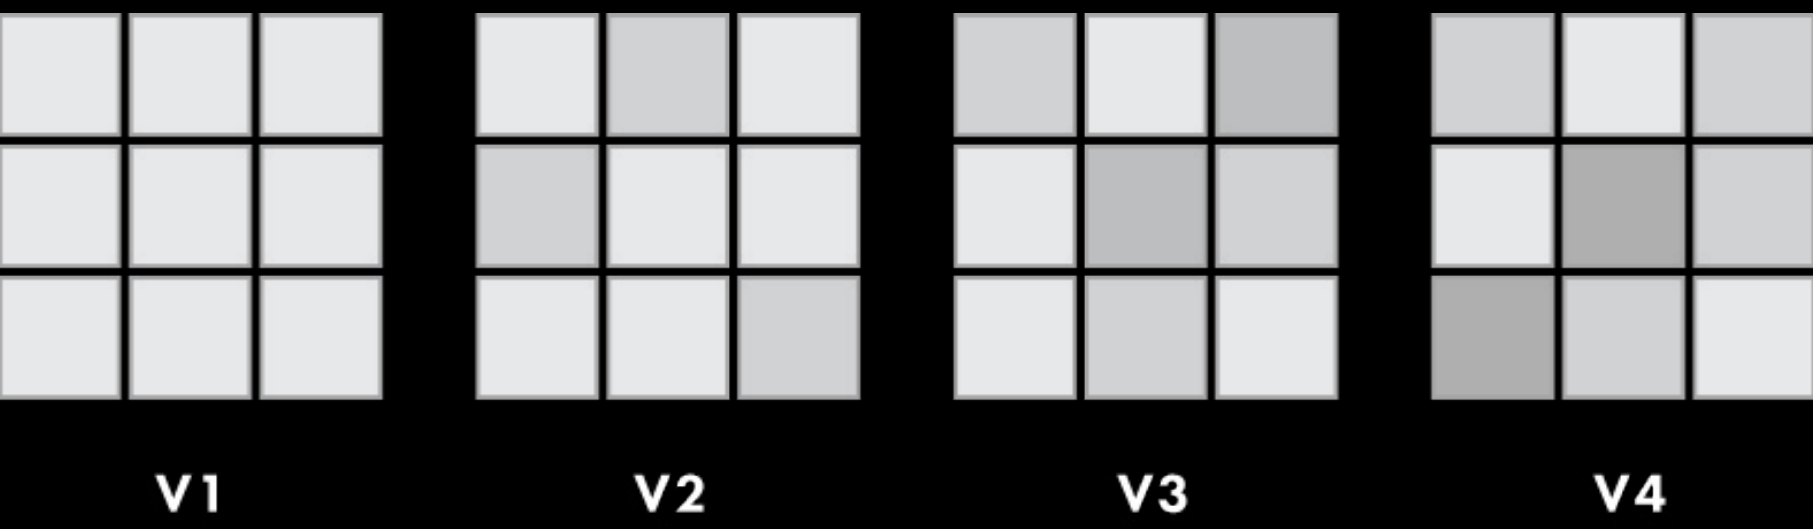

Variance Rating	Description
V1	Uniform Appearance
V2	Slight Variation
V3	Moderate Variation
V4	Substantial Variation

Colour	Variance
Cumin	V2
Flint	V2
Gunpowder	V2
Latte	V2
Pepper	V2

Ramp Test Values (DIN 51130)

DIN Standard Ramp Testing (DIN 51130) is an alternative to Pendulum Testing and generally categorised as an ‘off-site’ activity because of the size and complexity of the equipment required to carry out the test. The Slip Resistance Values (RSV) are factory gate values (based on supplied tiles) and categorised using the Ramp Test (DIN 51130) method which is commonly used by European factories. In this method, a lubricated inclined platform is adjusted to a gradually increasing gradient, and the angle is measured at which a person walking on it slips.

R Rating Value	Friction
R9	Minimal
R10	Normal
R11	Good
R12	Good
R13	Very High

Colour	Finish/Style	R Rating Value	Friction
Cumin	Natural R10	Normal	
Flint	Natural R10	Normal	
Gunpowder	Natural R10	Normal	
Latte	Natural R10	Normal	
Pepper	Natural R10	Normal	



P O R C E L A I N T I L E S

North London Showroom
23 Temple Fortune Parade
Finchley Road
London NW11 0QS
020 3141 3337

www.porcelaintiles.co.uk

South London Showroom
88 High Street Wimbledon
London SW19 5EG
020 3141 3337

enquiry@porcelaintiles.co.uk