# Essenza

Wood Collection

PORCELAINTILES




# Essenza

#### Wood Collection

Encapsulating the finest in Scandinavian design, Essenza is an on-trend wood-effect collection of four contemporary shades. This exceptionally versatile range comes in two traditional floorboard sizes, one of which, a high strength (R11 rated) 20 mm thick plank, is ideal for raised installations, dry laying, outdoor swimming pools and high traffic areas. With authentic textures and airy shades, Essenza can be used within a calming palette or as the backdrop to this year's bold colour trends. Whatever the space requires, Essenza embodies the true essence of Nordic living.




Essenza Artic

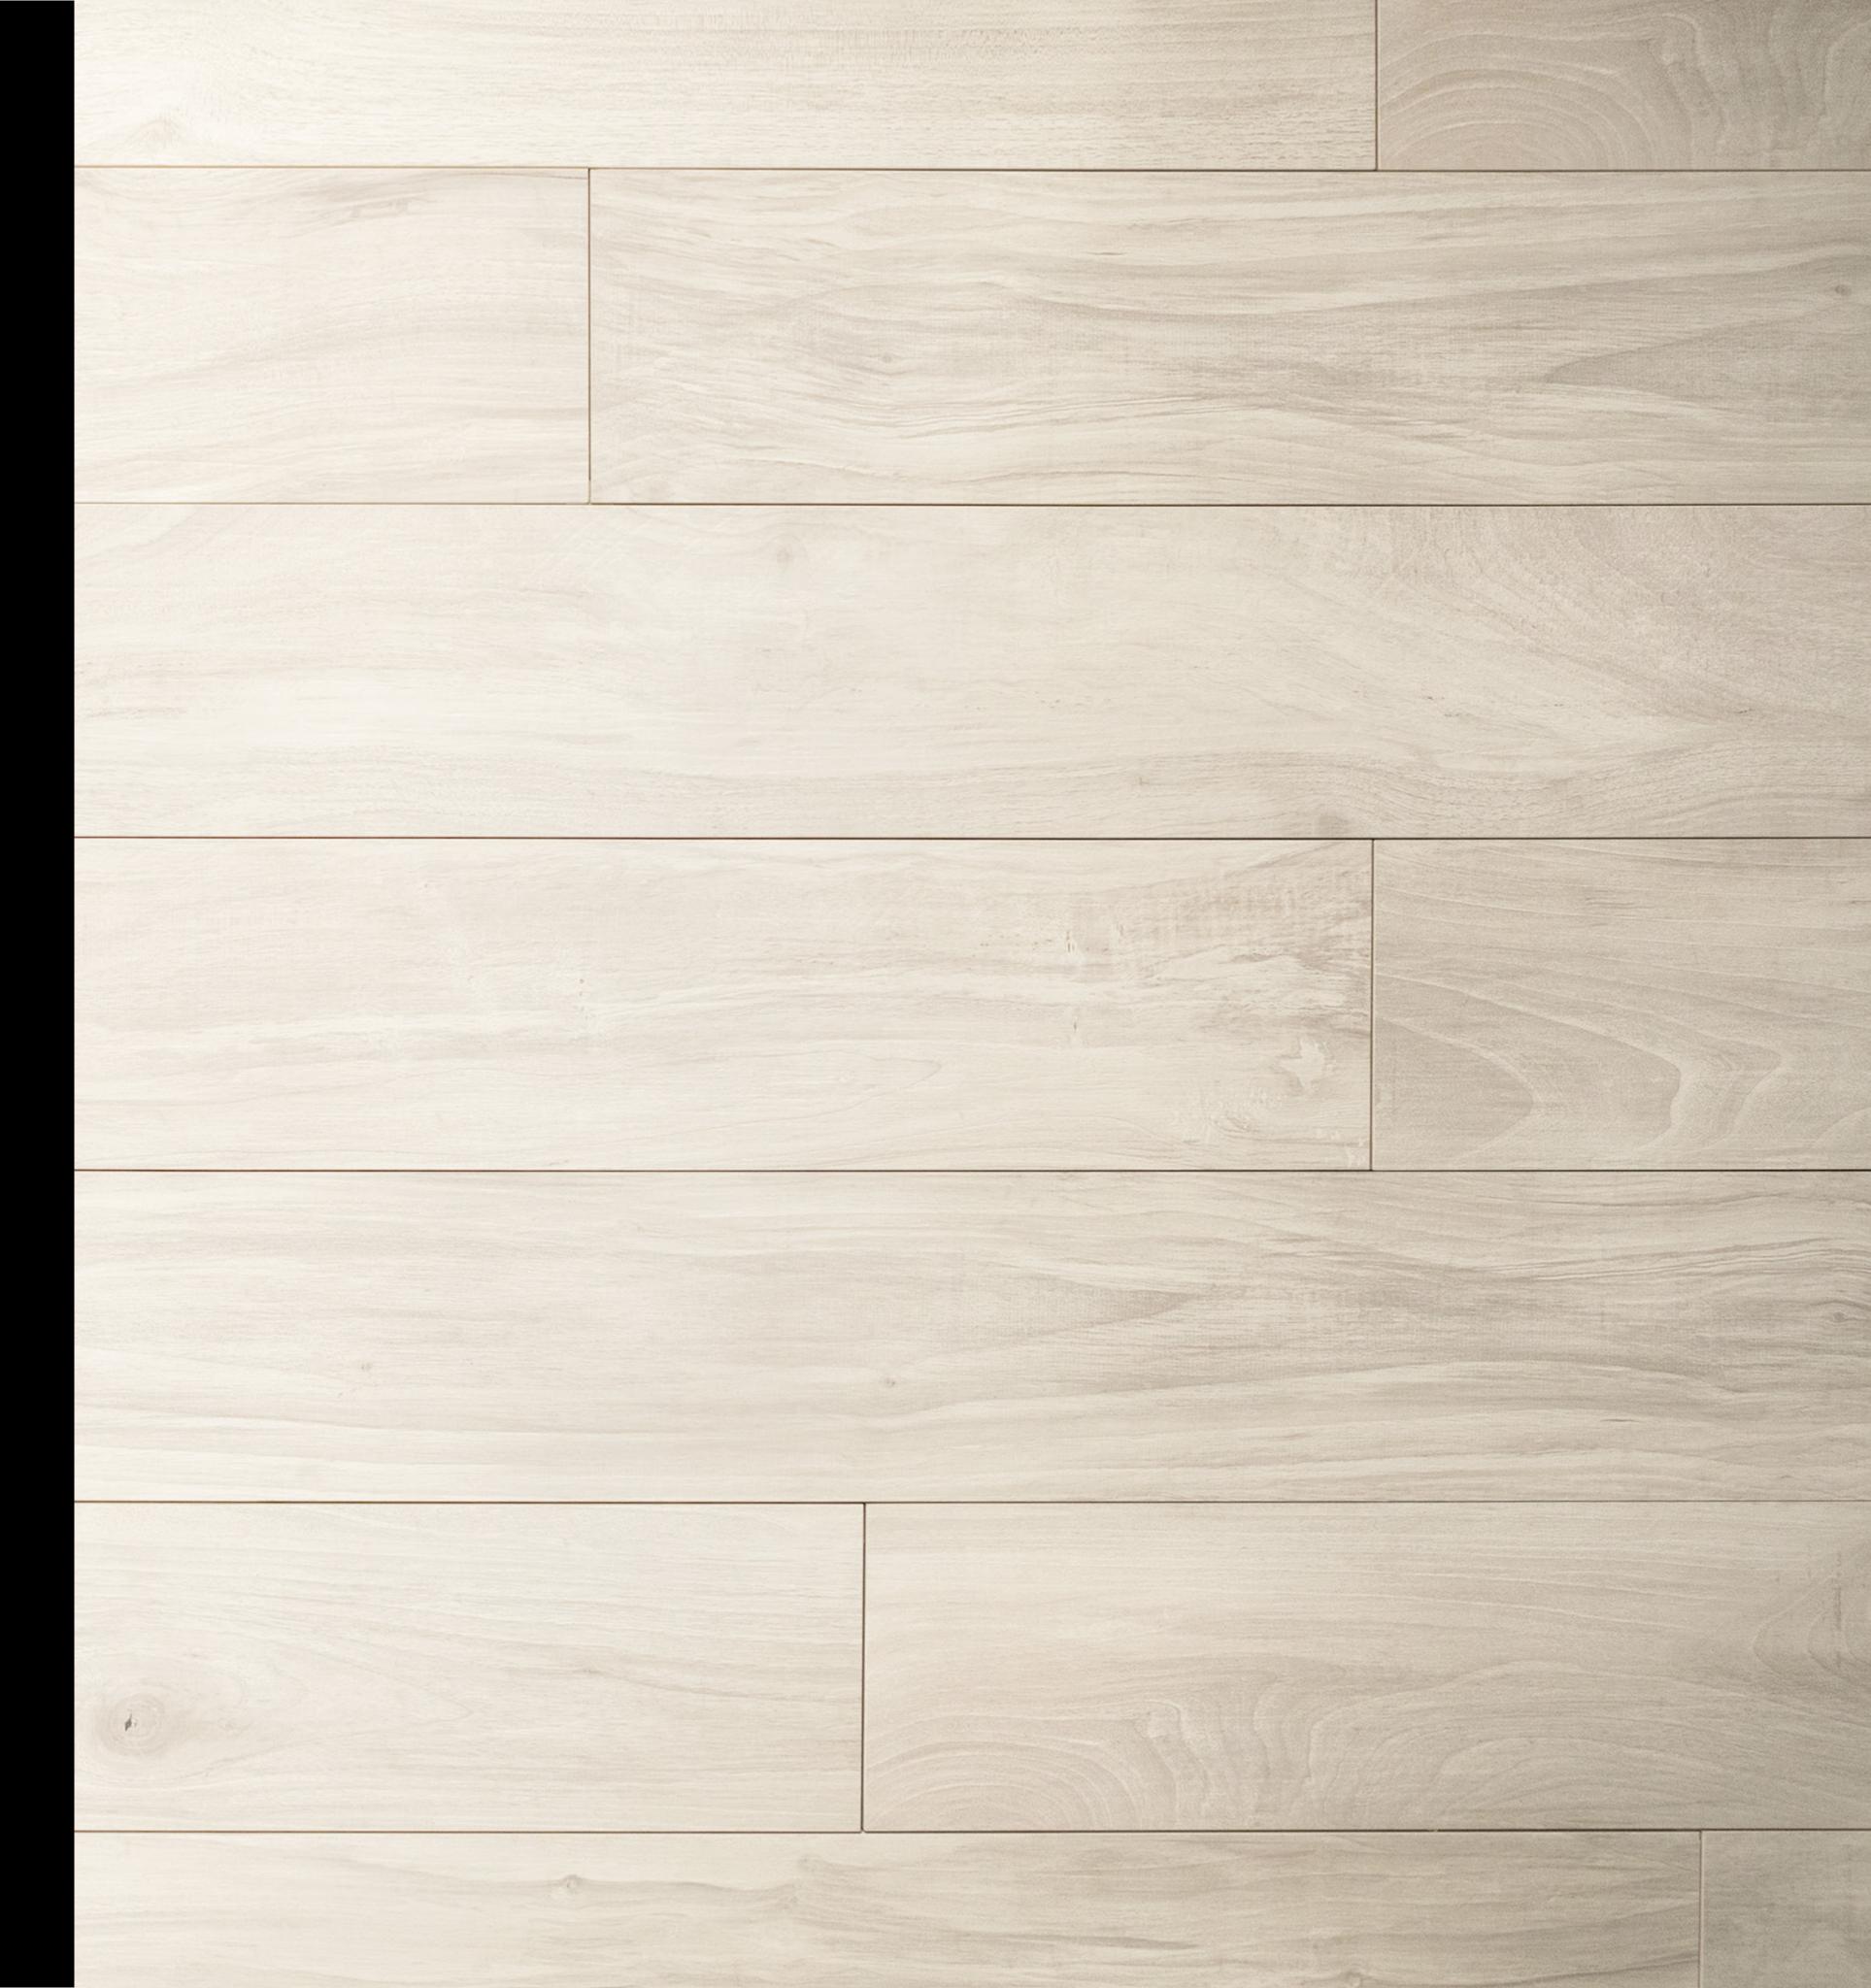





Essenza Board

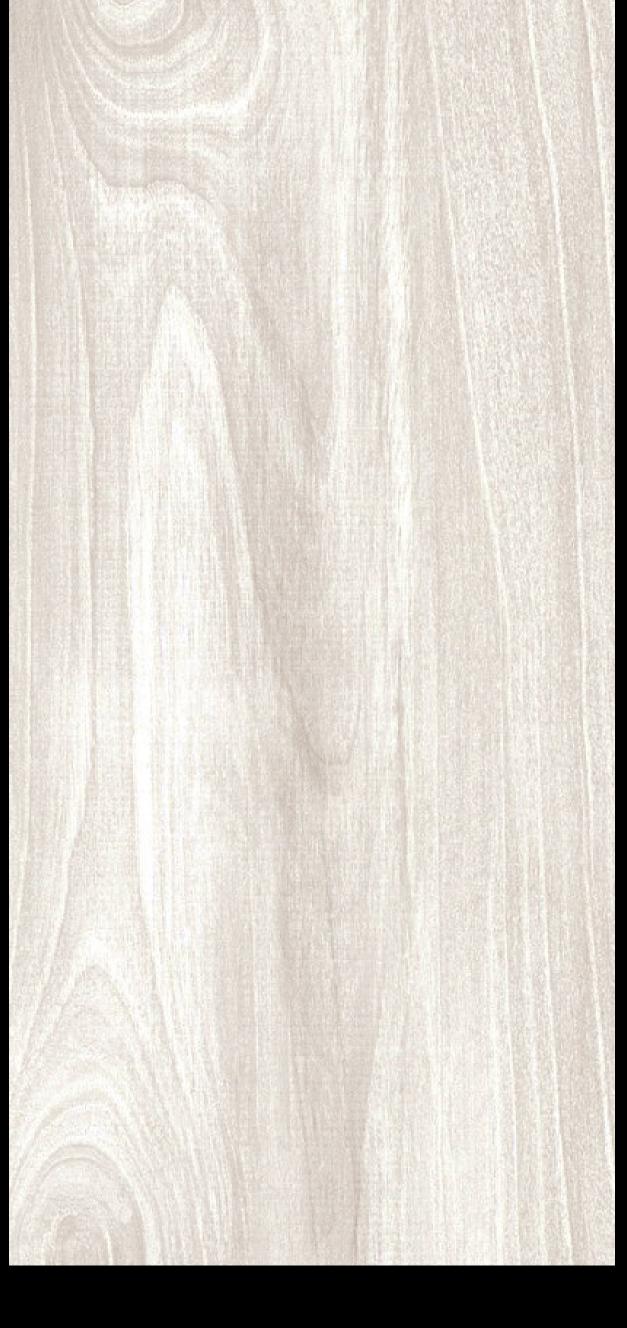

Essenza Fossil







Essenza **Powder** 

#### Colours



#### Colours

COLOUR	FINISH	SIZE(MM)
Artic   Board   Fossil   Powder	Grip	400 X 1200 X 20
Artic   Board   Fossil   Powder	Natural	200 X 1200 X 10

### Size Guide (mm)

200 X 1200 400 X 1200

## Special Pieces

COLOUR	FINISH	SIZE(MM)	DETAIL
Artic   Board   Fossil   Powder	Natural	65 X 1200 X 10	Skirting Tile
Artic   Board   Fossil   Powder	Natural	330 X 1200 X 32	Step Tile - Angolo Gradino DX Costa Retta
Artic   Board   Fossil   Powder	Natural	330 X 1200 X 32	Step Tile - Angolo Gradino SX Costa Retta
Artic   Board   Fossil   Powder	Natural	330 X 1200 X 32	Step Tile - Gradino Costa Retta

#### Technical Details

SPECIFICATION	TEST METHOD	REQUIRED VALUE	MANUFACTURERS MEAN VALUES
Length and width	ISO 10545-2	± 0.5%	± 0.1%
Thickness	ISO 10545-2	± 5%	± 4%
Straightness of edges	ISO 10545-2	± 0.5%	± 0.1%
Orthogonality	ISO 10545-2	± 0.6%	± 0.1%
Planarity	ISO 10545-2	± 0.5%	± 0.3%
Water Absorption	ISO 10545-3	≤ 0.5%	≤ 0.02%
Breaking Modulus	ISO 10545-4	$35 \text{ N/Mm}^2 = 356 \text{ Kg/Cm}^2$	Thickness 10mm: > 35 N/mm²
			Thickness 20mm: 64.5 N/mm²
Modulus of rupture	ISO 10545-4	Thickness: ≥ 7.5mm: Min. 1300 N	Thickness 10mm: > 1300 N
		< 7.5mm: Min. 700 N	Thickness 20mm: 16060 N
Deep Abrasion Resistance	ISO 10545-6	≤ 175 Mm³	117 Mm <sup>3</sup>
Thermal Expansion Coefficient	ISO 10545-8	Available on request	Available on request
Thermal Shock Resistance	ISO 10545-9	Available on request	Resistant
Frost Resistance	ISO 10545-12	Always Tested	Frost Proof
Chemical Reistance	ISO 10545-13	Min. UB/Min.GB	Min. UB/Min.GB
Household chemicals and swimming pool water cleaners	ISO 10545-13	Min. UB/Min.GB	Min. UB/Min.GB
Acids and low concentration alkalis	ISO 10545-13	From GLA, GLB To ULC	From GLA, GLB To ULC
Acids and high concentration alkalis	ISO 10545-13	Available on request	Available on request
Stain Resistance	ISO 10545-14	Available on request	Min. 4



#### PORCELAIN TILES

North London Showroom
23 Temple Fortune Parade
Finchley Road
London NW11 0QS
020 8731 6787

South London Showroom

88 High Street Wimbledon

London SW19 5EG

020 3141 3337

www.porcelaintiles.co.uk

enquiry@porcelaintiles.co.uk

The information printed in this brochure is as accurate as possible at the time of printing, but should not be considered as legally binding. The company reserves the right to modify, change, or cancel the content of this brochure without prior notice. The technical details mentioned cancel and replace the ones reported previously and where dimensions or sizes are specified, they shall be deemed to be nominal. The images, colours and finishes featured are for illustrative purposes only and may feature products that are not currently available. ©Porcelain Tiles Ltd – All rights reserved. V.19.105