Nero & Bianco

Stone Collection

PORCELAINTILES





Nero & Bianco Stone Collection

The Nero & Bianco range is the ultimate expression of polished minimalist style. Suitable for both domestic and commercial use, this range will maintain its flawless and highly reflective surface for the life of the tile. Perfect for large and high-traffic areas which demand a gleaming surface that is effortless to maintain.

5 COLOURS | 9 SIZES | 3 FINISHES



Nero & Bianco





Nero & Bianco

Bianco Bianco

Nero & Bianco Brilliante Bianco



Nero & Bianco Titanium White



Colours



Nero

Bianco

Brilliante Bianco



Titanium White




Colours

COLOUR	FINISH
Titanium White	Polished
Titanium White	Polished
Titanium White	Natural
Titanium White	Polished
Titanium White	Polished
Bianco Nero	Polished
Titanium White	Natural
Titanium White	Polished
Brillante Bianco	Grip
Bianco Brillante Bianco Nero	Polished
Brillante Bianco	Natural
Bianco Brillante Bianco Nero	Polished
Brillante Bianco	Natural

SIZE(MM) 1000 × 3000 × 6 1500 × 1500 × 6 750 × 1500 × 6 1000 × 1000 × 6 800 × 800 × 12 750 × 750 × 6 750 × 750 × 6 300 × 600 × 10 300 × 600 × 10


Size Guide (mm)

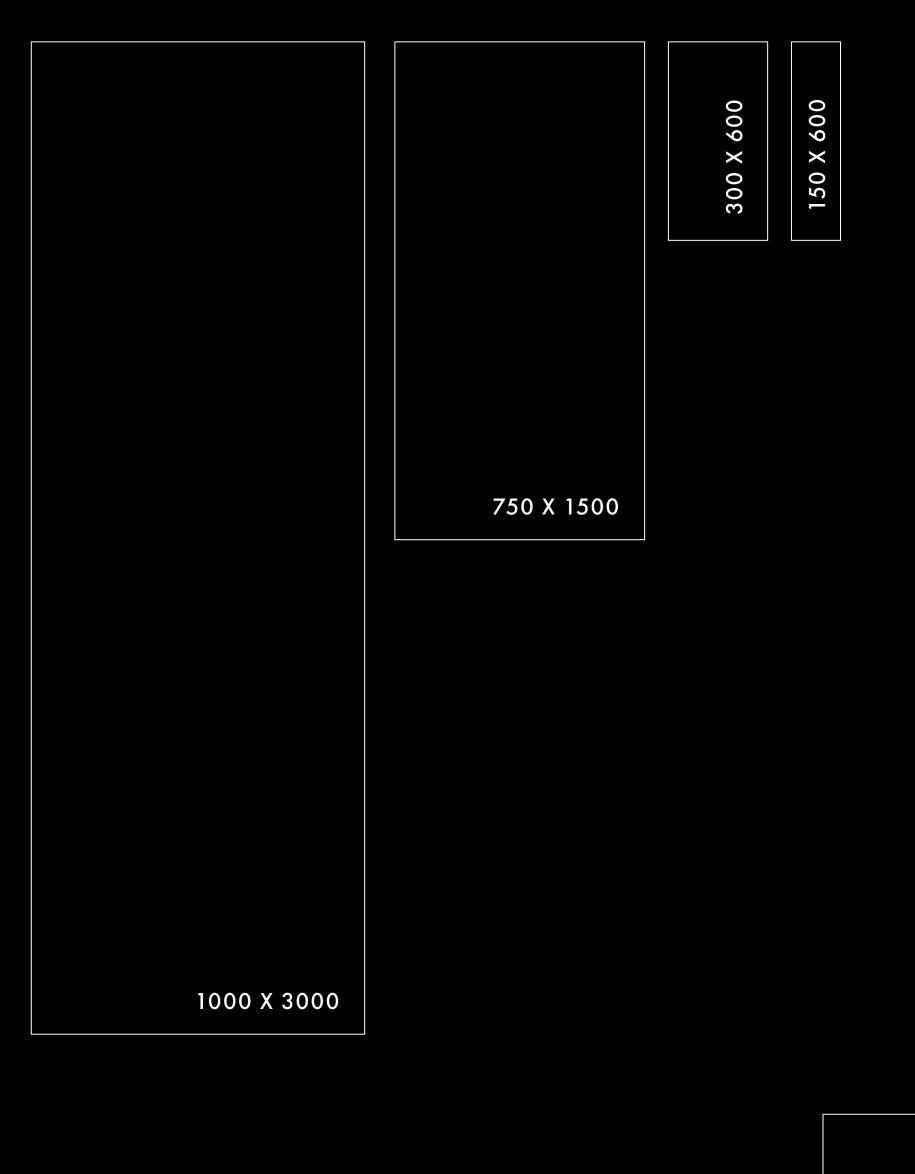



00 1500 X 1500

Special Pieces

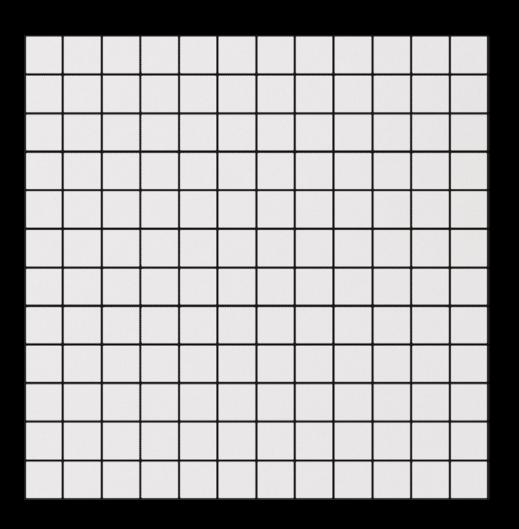

Mosaic (23 x 23)

COLOUR	FINISH	SIZE(MM)
Brillante Bianco	Polished	100 X 800 X 12
Brillante Bianco	Polished	100 X 600 X 10
Brillante Bianco	Natural	300 X 300 X 10

DETAIL Skirting Tile Skirting Tile Mosaic (23x23mm)

Nero & Bianco - Titanium White



Technical Details


FEATURES	FIXED VALUE (NORM)
Water absorption (%)	<0.5
Breaking strength (N)	>1300N
Bending strength (N/Mm2)	>35
Dimensions: Length (%)	+/-0.6 Max
Dimensions: Width (%)	+/-0.6 Max
Thickness (%)	+/-5.0 Max
Flatness (%)	+/-0.5 Max
Side straightness (%)	+/-0.5 Max
Corner squareness (%)	+/-0.6 Max
Resistance to deep abrasion (Mm3)	<175
Frost resistance	Available Method
Thermal shock resistance	Available Method
Resitance to chemical attack	MINUB

TEST METHOD	FACTORY'S MEAN VALUE
ISO-10545-3	≤0.1%
ISO-10545-4	>1500N
ISO-10545-4	≥38
ISO-10545-2	± 0.1%
ISO-10545-2	± 0.1%
ISO-10545-2	± 4.0%
ISO-10545-2	± 0.1%
ISO-10545-2	± 0.4 m m
ISO-10545-2	± 0.4 m m
EN 102	≤140mm3
EN 202	Resists
EN 104	Resists
ISO-10545-13	Conforms



Shade Tone Variance

Shade, texture and tone can vary from piece to piece within a single tile production run. V1 shade tone variation has little or no change from piece to piece where a V4 might have a substantial variety of shade, texture and tone variation.

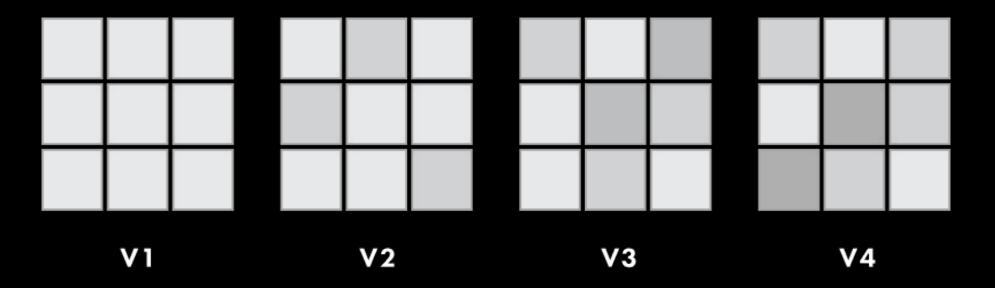

VARIANCE RATING	DESCRIPTION
V1	Uniform Appearance
V2	Slight Variation
V3	Moderate Variation
V4	Substantial Variation

COLOUR	VARIANCE
Bianco	V 1
Brillante Bianco	V 1
Nero	V 1
Titanium White	V 1

Ramp Test Values (DIN 51130)

DIN Standard Ramp Testing (DIN 51130) is an alternative to Pendulum Testing and generally categorised as an 'off-site' activity because of the size and complexity of the equipment required to carry out the test. The Slip Resistance Values (RSV) are factory gate values (based on supplied tiles) and categorised using the Ramp Test (DIN 51130) method which is commonly used by European factories. In this method, a lubricated inclined platform is adjusted to a gradually increasing gradient, and the angle is measured at which a person walking on it slips.

R RATING VALUE	FRICTION
R9	Minimal
R1O	Normal
R11	Good
R12	Good
R13	Very High

COLOUR	FINISH/STYLE	R RATING VALUE
Brillante Bianco	Grip	R10
Brillante Bianco	Natural	R9
Titanium White	Natural	R9

FRICTION Normal Minimal Minimal

Nero & Bianco - Titanium White



Environmental Certification



LEED[®] certification provides independent, third party verification that a building project meets the highest green building and performance measure. All certified projects receive a LEED[®] plaque, which is nationally recognised symbol demonstrating that a building us environmentally responsible, profitable and a healthy place to live and work. The environmental characteristics have been evaluated and found according to the requirements of content of recycled material for environmental assessment according to LEED[®] criteria. These products contribute to the increase in the LEED[®] rating of buildings where they are used.

The EU Ecolabel helps you identify products and services that have a reduced environmental impact throughout their life cycle, from the extraction of raw material through to production, use and disposal. Recognised throughout Europe, EU Ecolabel is a voluntary label promoting environmental excellence which can be trusted. Ecolabel certification applies to building products such as ceramic tiles for residential and public flooring and wall- covering. The commission in charge of the certification system measures the environmental impact caused by the entire productive cycle; in the case of ceramic tiles, the verification starts from raw material quarrying through to manufacturing, distribution, installation and their final disposal. Our factories conform and are certified by the European Community standard Ecolabel and the production process is in complete harmony with the Ecolabel certification.

GREENGUARD Certification ensures that a product meets stringent standards for minimal emissions of volatile organic compounds (VOCs) into indoor air. This program provides assurance that products designed for indoor use adhere to strict chemical emissions limits, fostering the creation of healthier interiors. Manufacturers with GREENGUARD Certification gain credibility for their sustainability claims, supported by empirical technical data from an unbiased third-party organisation. The GREENGUARD Certification Program instills confidence by ensuring that indoor products meet strict chemical emissions limits, contributing to the creation of healthier interior spaces. This empowers manufacturers to produce and customers to identify products with low chemical emissions, thereby supporting air quality and environmental well-being.

NSF® has facilitated the development of more than 75 standards and protocols for sanitary food equipment, and has certified thousands of products as safe to use in restaurant and commercial kitchen settings. NSF® food equipment standards include requirements for material safety, design, construction and product performance. The products conform to the requirements of NSF/ANSI Standard 51 – Food Equipment Materials. NSF/ANSI 51 establishes minimum public health and sanitation requirements for materials and finishes used in the manufacture of commercial foodservice equipment

An Environmental Product Declaration (EPD) is a concise document that transparently communicates the environmental performance of a product throughout its life cycle. It provides comprehensive information about the product's environmental impact, including aspects such as raw material extraction, production processes, energy consumption, and emissions. EPDs are based on standardised methodologies and enable consumers, businesses, and policymakers to make informed decisions by considering the environmental aspects of a product in a systematic and comparable way.

PORCELAIN TILES

North London Showroom 23 Temple Fortune Parade Finchley Road London NW11 0QS 020 3141 3337

www.porcelaintiles.co.uk

The information printed in this brochure is as accurate as possible at the time of printing, but should not be considered as legally binding. The company reserves the right to modify, change, or cancel the content of this brochure without prior notice. The technical details mentioned cancel and replace the ones reported previously and where dimensions or sizes are specified, they shall be deemed to be nominal. The images, colours and finishes featured are for illustrative purposes only and may feature products that are not currently available. ©Porcelain Tiles Ltd – All rights reserved. V.25.094

South London Showroom 88 High Street Wimbledon London SW19 5EG 020 3141 3337

enquiry@porcelaintiles.co.uk