Marble Collection

PORCELAINTILES



Marble Collection

Welcome to Royal Stone, the most noble of porcelain stoneware. With its innovative material, clean lines, and cool aesthetics Royal Stone is tailor-made for contemporary interiors and modern commercial spaces.

With each large format 1500 x 3000 mm slab offering 4.5 m2 of surface area and requiring fewer grout lines, Royal Stone is perfect for installations that span across both floor and wall areas, creating a magnificent, continuous surface and dramatically increasing the impact of the space. Developed using the latest compaction technology, Royal Stone is available in twelve practical sizes and can be specified for a wide variety of applications including walls, floors, countertops, fireplaces and fabricated objects such as furniture and vanity units. Unlike natural marble, Royal Stone provides a virtually maintenance free and water-resistant surface that will not fade or show signs of wear. This makes it ideal for high-traffic areas such as office corridors and hotel reception areas, where Royal Stone's exquisite beauty can be enjoyed as a work of art.



Royal Stone

Montana Grey Face 1 Face 2 Face 3 Face 4 Face 5

^{*} SEE TECHNICAL SPECIFICATION TABLE A



Elegant Marrone Face 1 Face 2 Fo

Face 3

Face 4

Face 5



^{*} SEE TECHNICAL SPECIFICATION TABLE A



Royal Stone

Bianco Pentelico Face 1 Face 2 Face 3 Face 4

^{*} SEE TECHNICAL SPECIFICATION TABLE A



Royal Stone

Cappella Face 1 Face 2 Face 3 Face 4



^{*} SEE TECHNICAL SPECIFICATION TABLE A



Royal Stone

Magic Brown

Face 1

Face 2

Face 3

Face 4

Face 4

^{*} SEE TECHNICAL SPECIFICATION TABLE A



Royal Stone

Elegant Dune Face 1 Face 2 Face 3 Face 4

^{*} SEE TECHNICAL SPECIFICATION TABLE A

Royal Stone
Moka Flame
Face 1
Face 2
Face 3
Face 4
Face 5

^{*} SEE TECHNICAL SPECIFICATION TABLE B



^{*} SEE TECHNICAL SPECIFICATION TABLE B

Colours



Montana Grey



Elegant Marrone



Bianco Pentelico

Colours



Colours


COLOUR
Cappella Elegant Dune Elegant Marrone Magic Brown Montana Grey
Bianco Pentelico
Bianco Pentelico Cappella Elegant Marrone Montana Grey
Elegant Dune
Moka Flame Tundra
Cappella Elegant Dune Elegant Marrone Magic Brown Montana Grey
Bianco Pentelico
Bianco Pentelico Cappella Elegant Marrone Montana Grey
Elegant Dune
Cappella Elegant Dune Elegant Marrone Magic Brown Montana Grey
Bianco Pentelico
Bianco Pentelico Cappella Elegant Marrone Montana Grey
Elegant Dune
Elegant Marrone Montana Grey
Moka Flame Tundra

FINISH	SIZE(MM)
Honed	1500 X 3000 X 6
Natural	1500 X 3000 X 6
Polished	1500 X 3000 X 6
Structured	1500 X 3000 X 6
Natural	1200 X 2800 X 6
Polished	1200 X 2800 X 6
Natural	1200 X 2400 X 6
Polished	1200 X 2400 X 6
Natural	800 X 1800 X 9
Polished	800 X 1800 X 9
Honed	1500 X 1500 X 6
Natural	1500 X 1500 X 6
Polished	1500 X 1500 X 6
Structured	1500 X 1500 X 6
Honed	750 X 1500 X 6
Natural	750 X 1500 X 6
Polished	750 X 1500 X 6
Structured	750 X 1500 X 6
Honed	250 X 1500 X 6
Polished	250 X 1500 X 6
Honed	187 X 1500 X 6
Polished	187 X 1500 X 6
Natural	1200 X 1200 X 6

Colours continued

Moka Flame Tundra	Polished	1200 X 1200 X 6
Moka Flame Tundra	Natural	600 X 1200 X 9
Moka Flame Tundra	Polished	600 X 1200 X 9
Moka Flame Tundra	Natural	600 X 1200 X 6
Moka Flame Tundra	Polished	600 X 1200 X 6
Cappella Elegant Dune Elegant Marrone Magic Brown Montana Grey	Honed	750 X 750 X 6
Bianco Pentelico Cappella Elegant Marrone Montana Grey	Polished	750 X 750 X 6
Elegant Dune	Structured	750 X 750 X 6
Elegant Marrone Montana Grey	Honed	375 X 750 X 6
Elegant Marrone Montana Grey	Polished	375 X 750 X 6
Bianco Pentelico	Polished	600 X 600 X 8
Bianco Pentelico	Polished	300 X 600 X 8

Size Guide (mm)

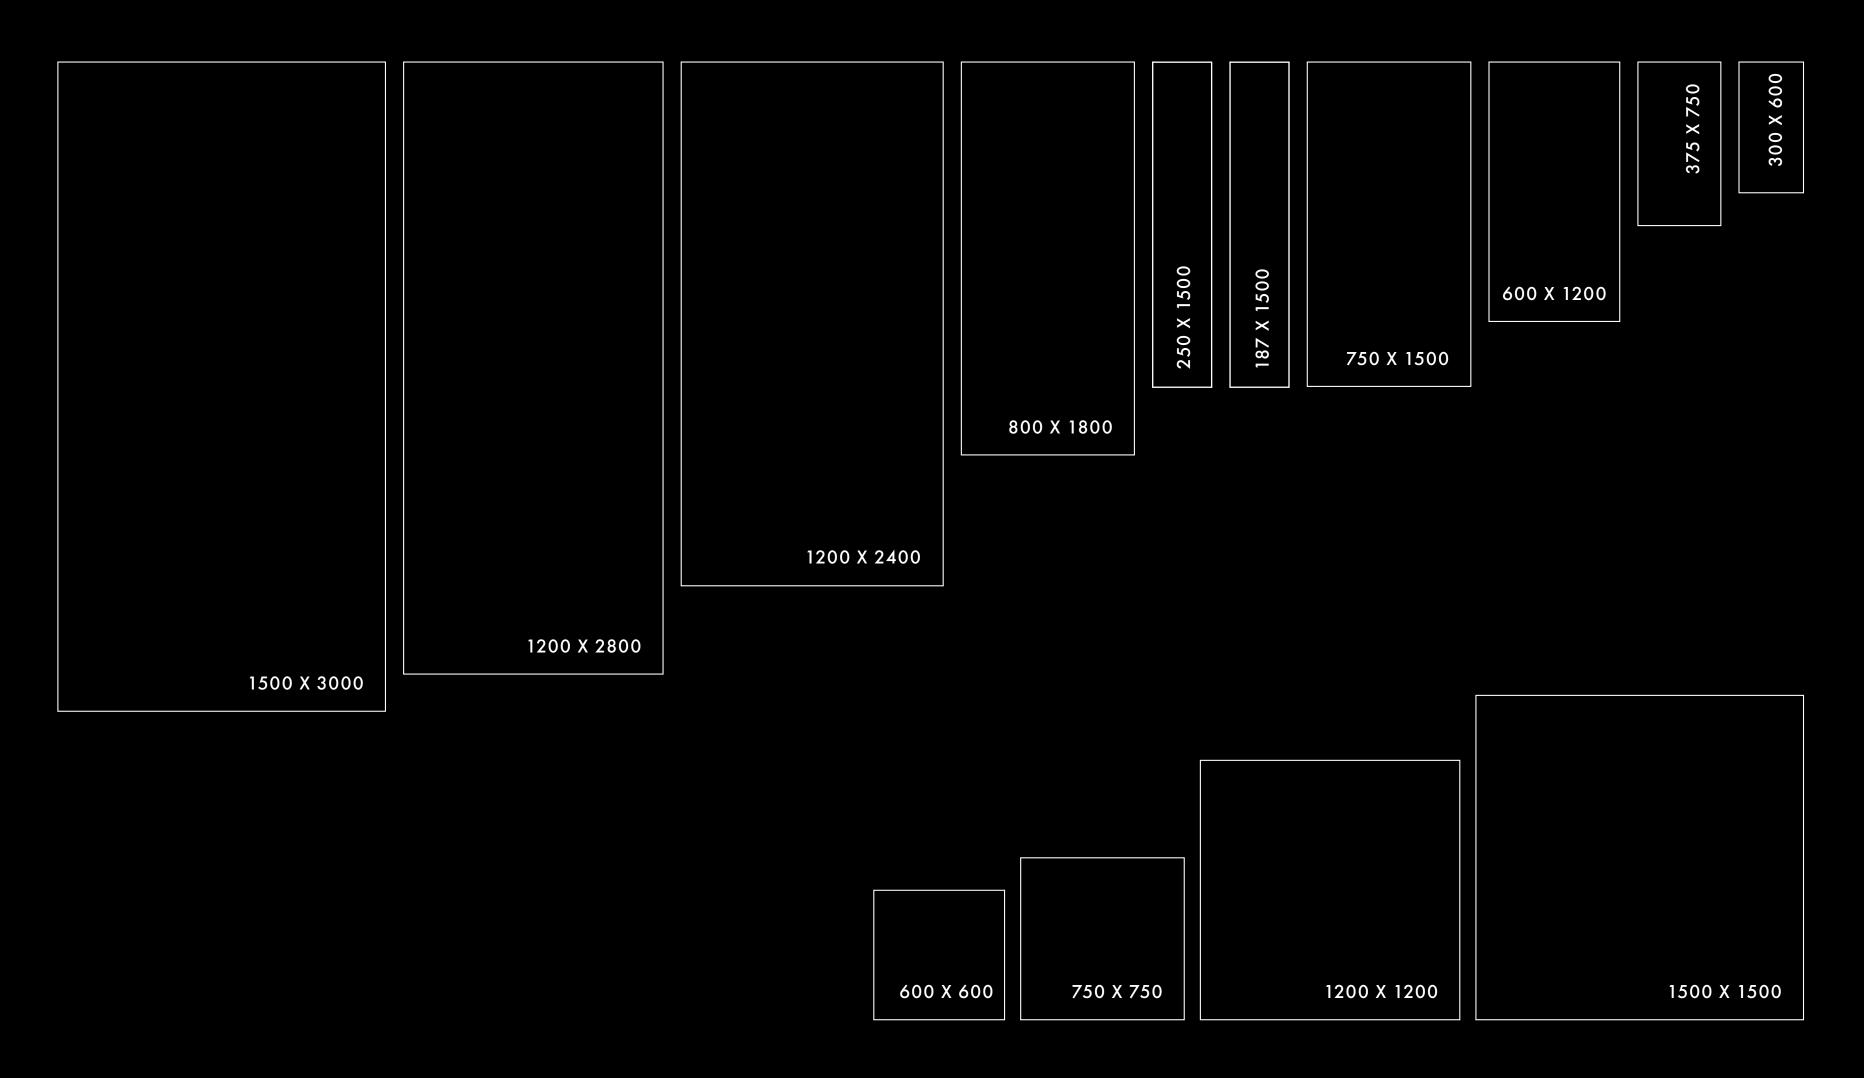

Special Pieces

COLOUR	FINISH	SIZE(MM)	DETAIL
Bianco Pentelico	Natural	65 X 600 X 8	Skirting Tile
Bianco Pentelico	Polished	65 X 600 X 8	Skirting Tile

Technical Details - Table A


TECHNICAL DATA	STANDARD	REQUIREMENT	COLLECTION VALUE
Length And Width	ISO 10545-2	± 0.6% Max	± 0.1%
Thickness	ISO 10545-2	± 5% Max	± 5%
Linearity	ISO 10545-2	± 0.5% Max	± 0.1%
Wedging	ISO 10545-2	± 0.5% Max	± 0.1%
Warpage	ISO 10545-2	± 0.5% Max	± 0.2%
Water Absorption	ISO 10545-3	≤ 0.5 %	Natural: 0.03% - 0.06%
			Polished: 0.05% - 0.08%
Deep Abrasion Resistance	ISO 10545-6	≤ 175 Mm³	140 Mm ³
Coefficient Of Linear Thermal Expansion	ISO 10545-8	≤ 9x10-6 °C-1	6.5x10-6 °C-1
Resistance To Thermal Shocks	ISO 10545-9	Testing Method Available	Resistant
Frost Resistance	ISO 10545-12	Must Not Produce Noticeable	
		Alteration To Surface	Conforms
Chemical Resistance	ISO 10545-13	Testing Method Available	On Request
Stain Resistance	ISO 10545-14	Testing Method Available	Resistant To Stain
Colour Resistance To Light	DIN 51094	Must Not Produce Noticeable	
		Colour Variation	Conforms

Technical Details - Table B

TECHNICAL DATA	STANDARD	REQUIREMENT	COLLECTION VALUE
Length And Width	ISO 10545-2	± 0.6% Max	± 0.15%
Thickness	ISO 10545-2	± 5% Max	± 5%
Linearity	ISO 10545-2	± 0.5% Max	± 0.1%
Wedging	ISO 10545-2	± 0.5% Max	± 0.2%
Warpage	ISO 10545-2	± 0.5% Max	± 0.2%
Water Absorption	ISO 10545-3	≤ 0.5 %	± 0.8%
Deep Abrasion Resistance	ISO 10545-6	≤ 175 Mm³	140 Mm ³
Resistance To Thermal Shocks	ISO 10545-9	Testing Method Available	Resistant
Frost Resistance	ISO 10545-12	Must Not Produce Noticeable	
		Alteration To Surface	Resistant
Chemical Resistance	ISO 10545-13	Testing Method Available	On Request
Stain Resistance	ISO 10545-14	Testing Method Available	Class 4-5

Shade Tone Variance

Shade, texture and tone can vary from piece to piece within a single tile production run. V1 shade tone variation has little or no change from piece to piece where a V4 might have a substantial variety of shade, texture and tone variation.

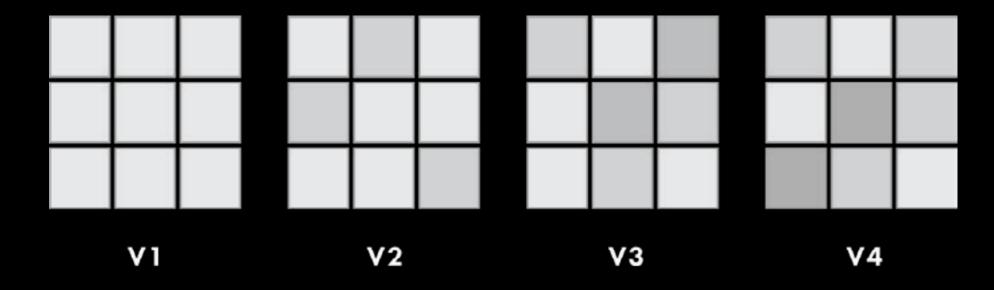

VARIANCE RATING	DESCRIPTION
V1	Uniform Appearance
V2	Slight Variation
V3	Moderate Variation
V4	Substantial Variation

COLOUR	VARIANCE
Bianco Pentelico	V3
Cappella	V3
Elegant Dune	V3
Elegant Marrone	V3
Magic Brown	V3
Moka Flame	V4
Montana Grey	V3
Tundra	V3

Ramp Test Values (DIN 51130)

DIN Standard Ramp Testing (DIN 51130) is an alternative to Pendulum Testing and generally categorised as an 'off-site' activity because of the size and complexity of the equipment required to carry out the test. The Slip Resistance Values (RSV) are factory gate values (based on supplied tiles) and categorised using the Ramp Test (DIN 51130) method which is commonly used by European factories. In this method, a lubricated inclined platform is adjusted to a gradually increasing gradient, and the angle is measured at which a person walking on it slips.

R RATING VALUE	FRICTION
R9	Minimal
R1O	Normal
R11	Good
R12	Good
R13	Very High

COLOUR	FINISH/STYLE	R RATING VALUE	FRICTION
Moka Flame	Natural	R10	Normal
Tundra	Natural	R10	Normal

26

Environmental Certification



LEED® certification provides independent, third party verification that a building project meets the highest green building and performance measure. All certified projects receive a LEED® plaque, which is nationally recognised symbol demonstrating that a building us environmentally responsible, profitable and a healthy place to live and work. The environmental characteristics have been evaluated and found according to the requirements of content of recycled material for environmental assessment according to LEED® criteria. These products contribute to the increase in the LEED® rating of buildings where they are used.



The EU Ecolabel helps you identify products and services that have a reduced environmental impact throughout their life cycle, from the extraction of raw material through to production, use and disposal. Recognised throughout Europe, EU Ecolabel is a voluntary label promoting environmental excellence which can be trusted. Ecolabel certification applies to building products such as ceramic tiles for residential and public flooring and wall- covering. The commission in charge of the certification system measures the environmental impact caused by the entire productive cycle; in the case of ceramic tiles, the verification starts from raw material quarrying through to manufacturing, distribution, installation and their final disposal. Our factories conform and are certified by the European Community standard Ecolabel and the production process is in complete harmony with the Ecolabel certification.



GREENGUARD Certification ensures that a product meets stringent standards for minimal emissions of volatile organic compounds (VOCs) into indoor air. This program provides assurance that products designed for indoor use adhere to strict chemical emissions limits, fostering the creation of healthier interiors. Manufacturers with GREENGUARD Certification gain credibility for their sustainability claims, supported by empirical technical data from an unbiased third-party organisation. The GREENGUARD Certification Program instills confidence by ensuring that indoor products meet strict chemical emissions limits, contributing to the creation of healthier interior spaces. This empowers manufacturers to produce and customers to identify products with low chemical emissions, thereby supporting air quality and environmental well-being.



NSF® has facilitated the development of more than 75 standards and protocols for sanitary food equipment, and has certified thousands of products as safe to use in restaurant and commercial kitchen settings. NSF® food equipment standards include requirements for material safety, design, construction and product performance. The products conform to the requirements of NSF/ANSI Standard 51 – Food Equipment Materials. NSF/ANSI 51 establishes minimum public health and sanitation requirements for materials and finishes used in the manufacture of commercial foodservice equipment



An Environmental Product Declaration (EPD) is a concise document that transparently communicates the environmental performance of a product throughout its life cycle. It provides comprehensive information about the product's environmental impact, including aspects such as raw material extraction, production processes, energy consumption, and emissions. EPDs are based on standardised methodologies and enable consumers, businesses, and policymakers to make informed decisions by considering the environmental aspects of a product in a systematic and comparable way.



PORCELAINTILES

North London Showroom

23 Temple Fortune Parade
Finchley Road
London NW11 OQS

020 3141 3337

South London Showroom

88 High Street Wimbledon

London SW19 5EG

020 3141 3337

www.porcelaintiles.co.uk

enquiry@porcelaintiles.co.uk

The information printed in this brochure is as accurate as possible at the time of printing, but should not be considered as legally binding. The company reserves the right to modify, change, or cancel the content of this brochure without prior notice. The technical details mentioned cancel and replace the ones reported previously and where dimensions or sizes are specified, they shall be deemed to be nominal. The images, colours and finishes featured are for illustrative purposes only and may feature products that are not currently available. ©Porcelain Tiles Ltd – All rights reserved. V.23.325