

Trio

Wood Collection

P O R C E L A I N T I L E S



Trio - Poplar (wall) & Camphor Chevron (floor)

Trio

Wood Collection

Radiating a beautifully warm patina, Trio effortlessly combines authentic charm with versatility. Available in four practical sizes, including standard 200 mm and wide 300 x 1200 mm floorboards plus a chevron design ideal for both open room layouts and high traffic areas. Trio also comes in substantial 20 mm deep 600 x 600 mm slabs. These 20 mm thick frost-resistant outdoor slabs can be laid on pedestals, making the tiles ideal for use on roof terraces and balconies. They can also be laid directly on gravel, helping to speed up the laying process and providing the perfect solution for when tiles may need to be removed at a later date. With five natural colours, Oak, Pine, Smoke, Camphor and Poplar, Trio displays realistic knots and authentic graining, perfect for where a durable and maintenance-free wood floor is required.

5 COLOURS | 4 SIZES | 2 FINISHES | R9 NATURAL | R11 GRIP | V3 VARIATION (V4 CHEVRON)



Trio
Camphor





Trio
Chevron (Camphor)





Trio
Smoke





Trio
Oak



Trio
Pine



Trio
Poplar

Colours



Camphor



Smoke



Oak



Pine




Poplar

Colours

COLOUR	FINISH	SIZE(MM)
Oak Smoke	Grip	300 X 1200 X 20
Oak Smoke	Grip	197 X 1200 X 20
All colours	Natural	200 X 1200 X 9
Oak Smoke	Grip	600 X 600 X 20

Size Guide (mm)

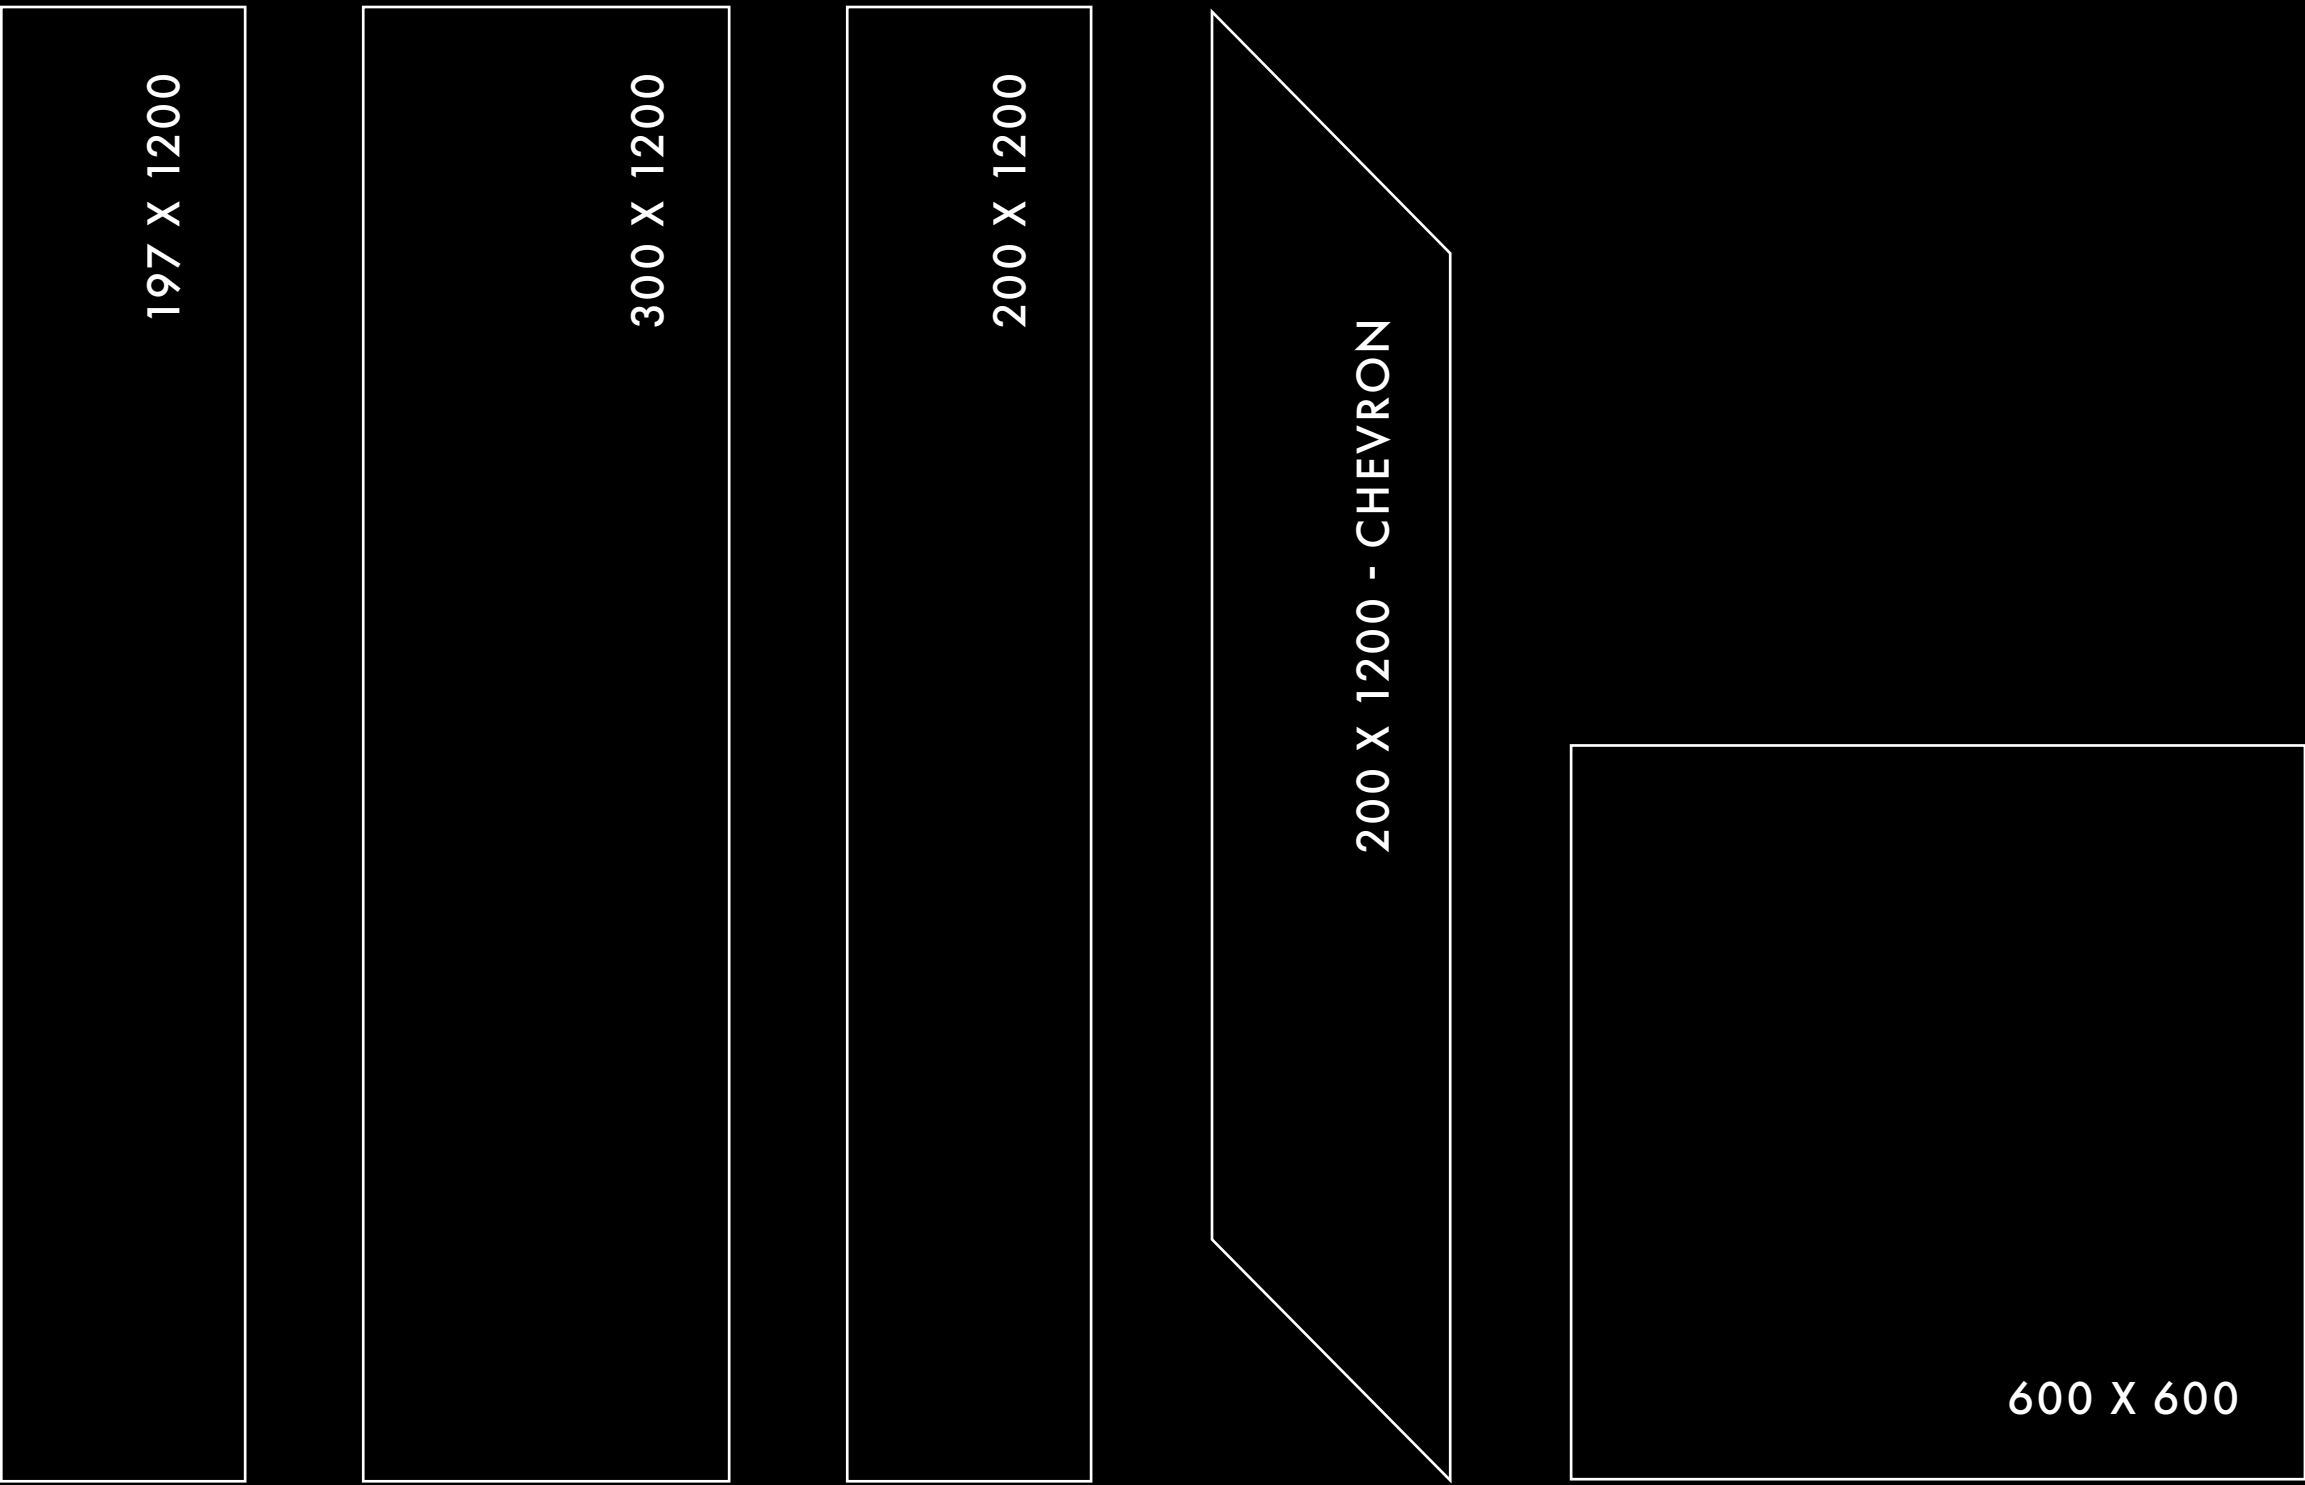

Special Pieces

DETAIL	COLOUR	FINISH	SIZE(MM)
Step Tile - Gradino A	Camphor Oak Pine Poplar Smoke	Natural	300 X 1200
Skirting Tile	Camphor Oak Pine Poplar Smoke	Natural	72 X 600



Trio - Pine Chevron

Technical Details

PHYSICAL PROPERTIES	STANDARD OF TEST	REQUIRED VALUE	MANUFACTURERS MEAN VALUES
Sides	EN ISO 10545-2	± 0.6% MAX (± 2.0 mm MAX)	Complies
Thickness	EN ISO 10545-2	± 5.0% MAX (± 0.5 mm MAX)	Complies
Straightness of sides	EN ISO 10545-2	± 0.5% MAX (± 1.5 mm MAX)	Complies
Rectangularity	EN ISO 10545-2	± 0.6% MAX (± 2.0 mm MAX)	Complies
Surface flatness	EN ISO 10545-2	± 0.5% MAX (± 2.0 mm MAX)	Complies
Water absorption	EN ISO 10545-3	≤ 0.5%	0.04%
Flexion resistance	EN ISO 10545-4	S ≥ 700 N (< 7.5 mm) S ≥ 1.300 N (> 7.5 mm)	S 2.917 N R ≥ 51.7 N/mm ² (20x120 size)
Impact resistance	EN ISO 10545-5	DECLARED VALUE	0.89
Abrasion resistance	EN ISO 10545-6	≤ 175 mm ³	130 mm ³
Coefficient of linear thermal-expansion	EN ISO 10545-8	—	Available on request
Resistance to thermal shocks	EN ISO 10545-9	PASS ACCORDING EN ISO 10545-1	NO DAMAGE
Frost resistance	EN ISO 10545-12	PASS ACCORDING EN ISO 10545-1	NO DAMAGE
Resistance to chemicals	EN ISO 10545-13	UB MIN.	UA ULA UHA
Resistance to stains	EN ISO 10545-14	DECLARED VALUE	5
Lead and cadmium discharge	EN ISO 10545-15	DECLARED VALUE	< THAN INSTRUMENT LIMIT
Slip resistance	DIN 51130	-	Natural: R9 Grip: R11



Trio - Oak (Grip, 20mm)

P O R C E L A I N T I L E S

North London Showroom
23 Temple Fortune Parade
Finchley Road
London NW11 0QS
020 3141 3337

www.porcelaintiles.co.uk

South London Showroom
88 High Street Wimbledon
London SW19 5EG
020 3141 3337

enquiry@porcelaintiles.co.uk