

The background is a dark, charcoal grey color with intricate, white, organic patterns resembling marble veins or stone cracks. These patterns are distributed across the entire frame, creating a sophisticated and textured backdrop for the text.

Via Onice

Marble Collection

P O R C E L A I N T I L E S



Via Onice - Dolce | Malaga | Smeraldo | Violet

Via Onice

Marble Collection

Unveiling our newest masterpiece – the Via Onice Collection of porcelain slabs. This avant-garde range introduces a captivating palette inspired by the translucence of natural onyx stone, showcasing a symphony of opulent surfaces. To add to the application possibilities, a new Natural R10 finish has been introduced, which provides excellent anti-slip performance while still retaining the soft, silky feel of precious stone. Offered in the expansive large formats and a new 900 x 1800 mm size, Via Onice breaks through conventional design boundaries. The slabs boast shimmering patterns that mirror the exquisite depth and unique veining of natural onyx. Beyond conventional applications, these slabs are suitable for walls, floors, and every conceivable vertical or horizontal surface. Elevate your interior spaces with the luxurious allure of onyx, as Via Onice stands poised to inspire designers to design creations that evoke modern opulence.

10 COLOURS | 6 SIZES | 3 FINISHES



Via Onice - Jet & Bright

Via Onice
Bright

Face 1

Face 2

Face 3

Face 4

Face 5






Via Onice - Cyan

Via Onice
Cyan

Face 1




Face 2

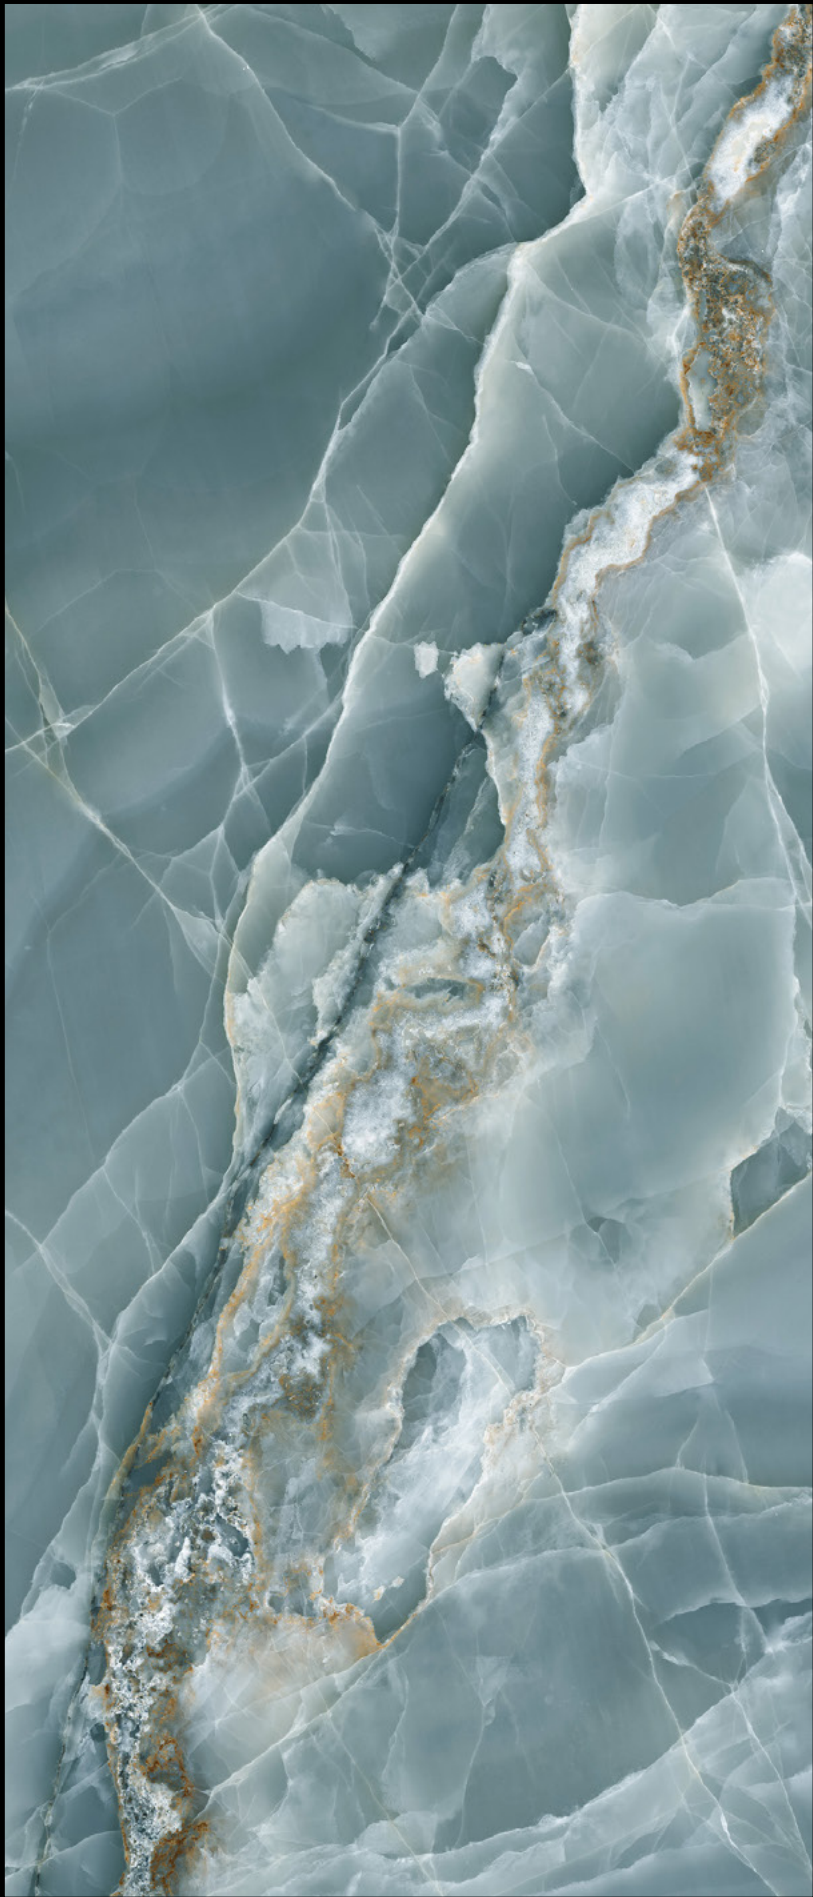

Face 3



Face 4

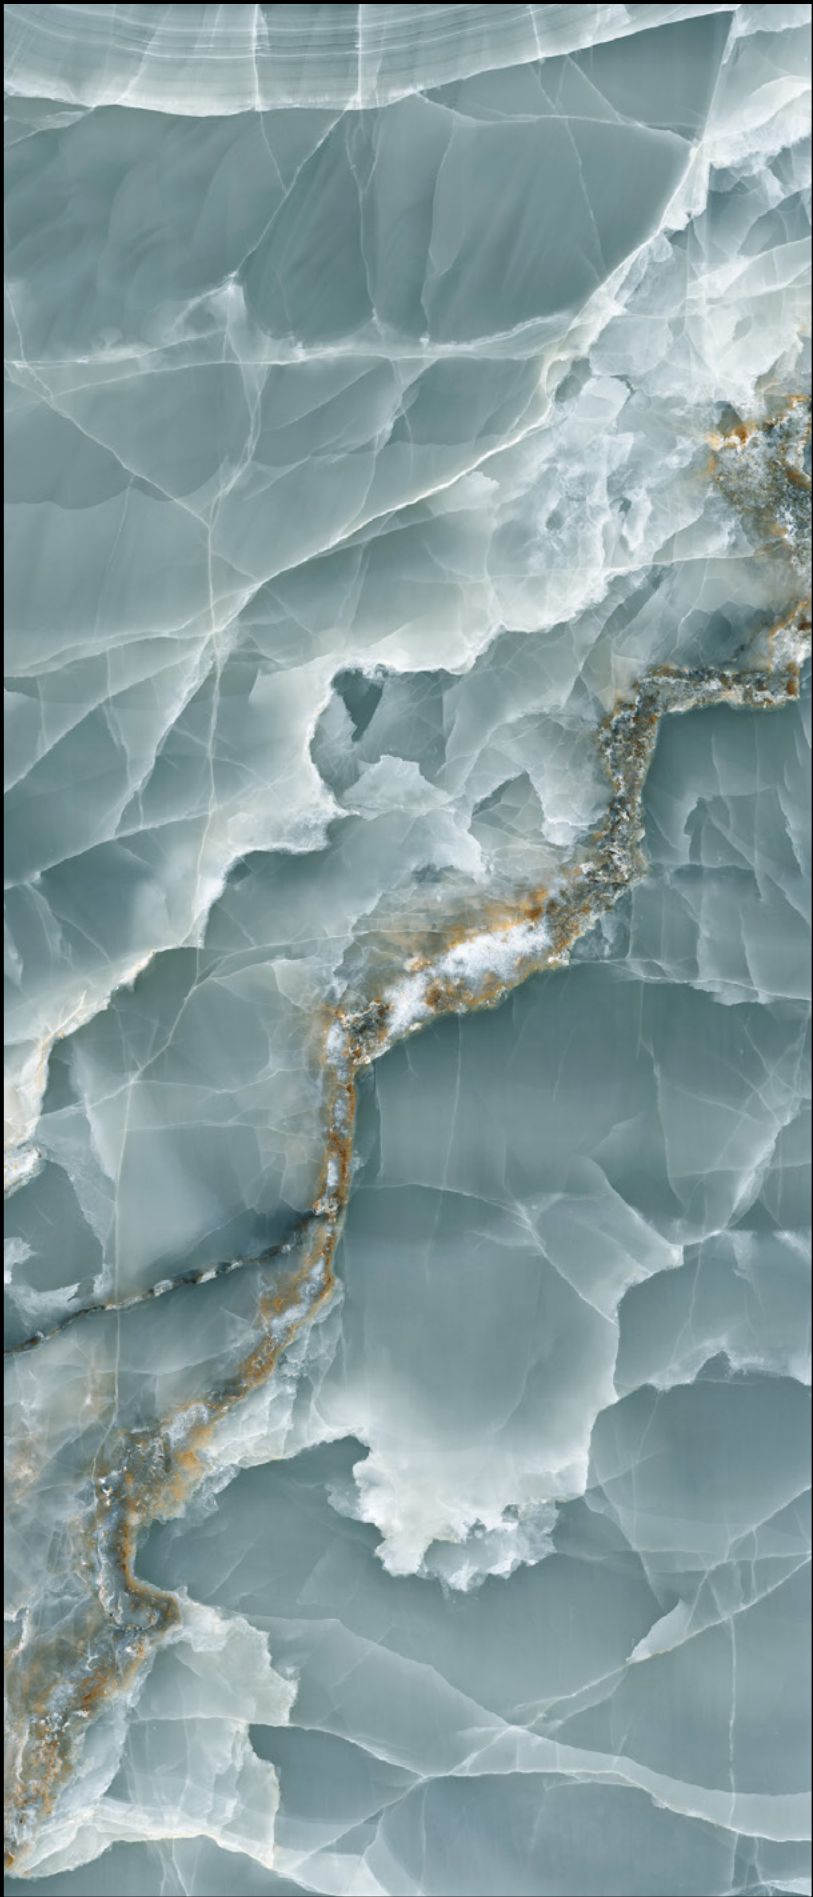

Face 5



Face 6





Via Onice
Dolce


Face 1

Face 2

Face 3


Face 4

Face 5

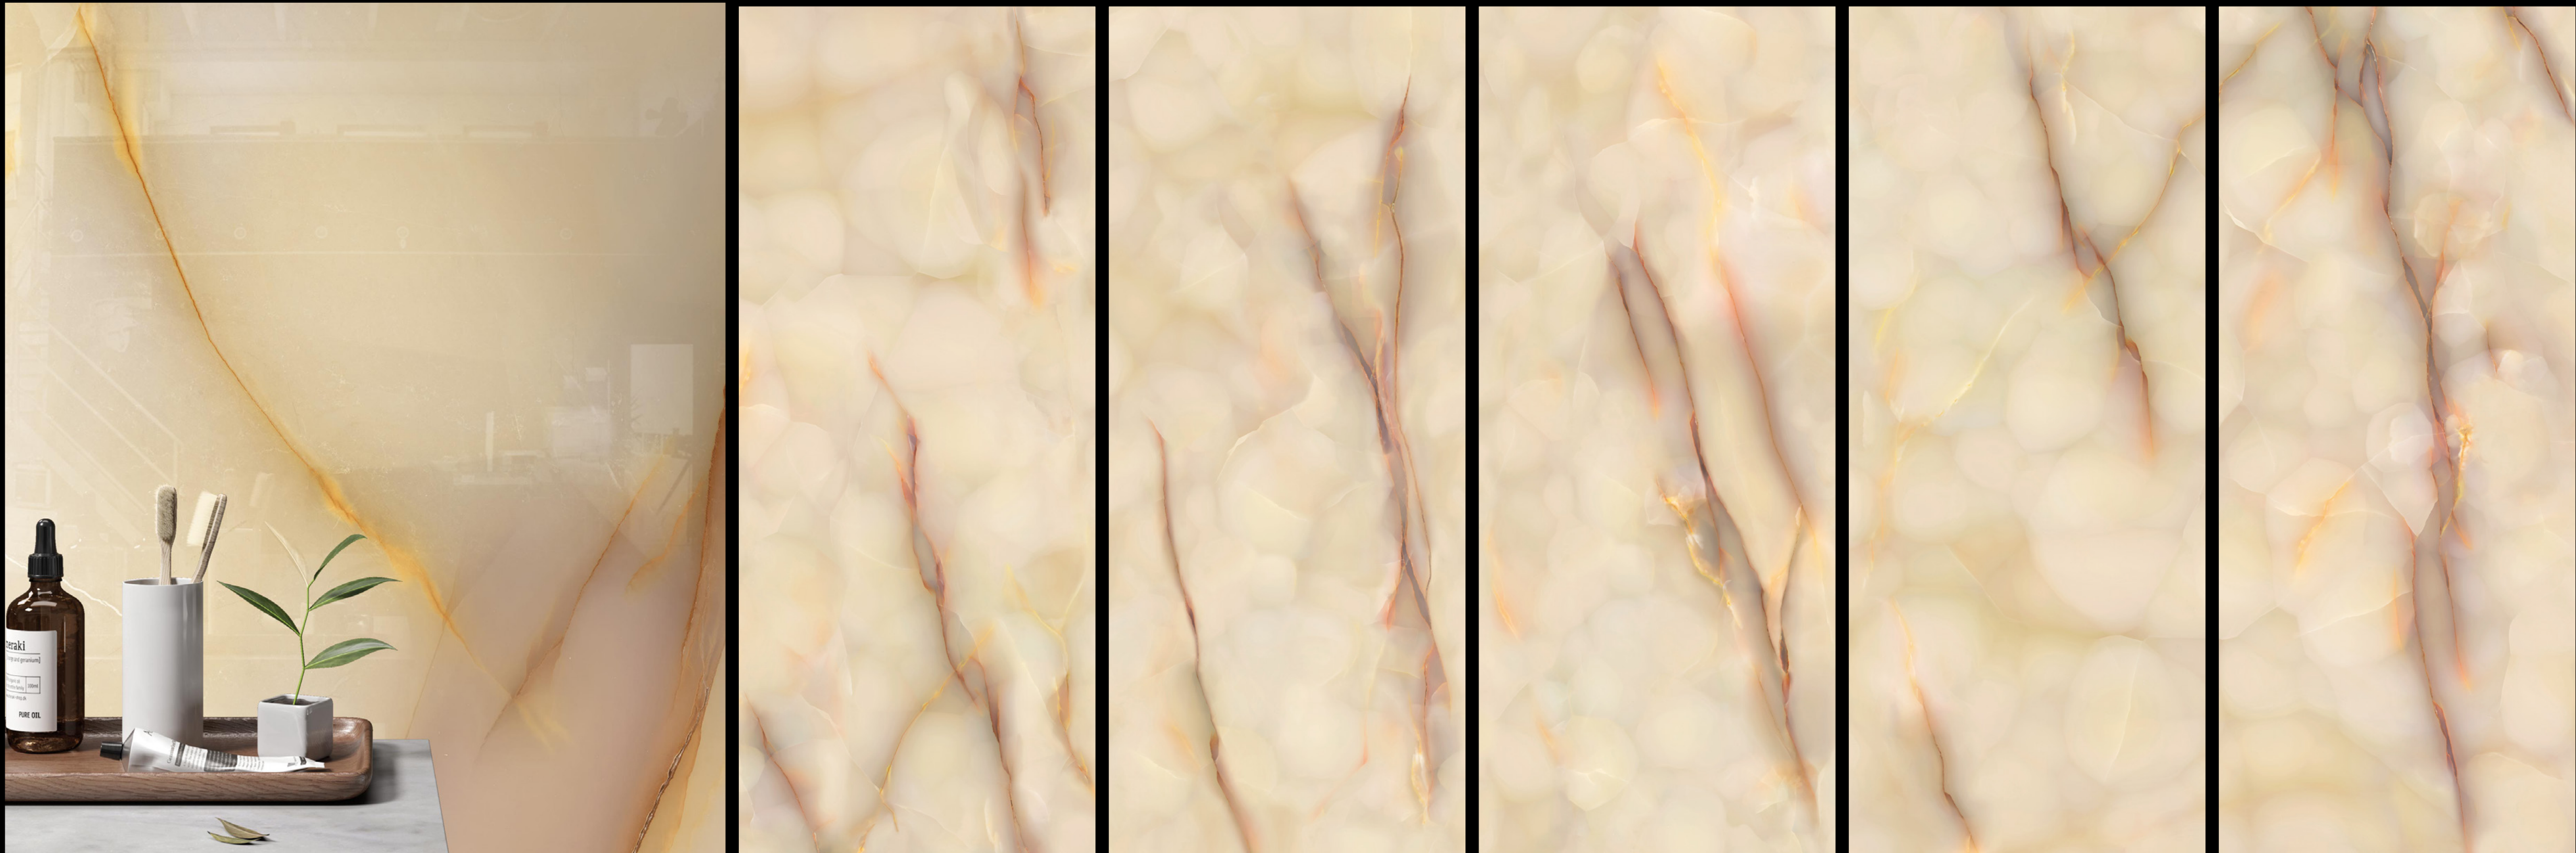



Via Onice
Jet

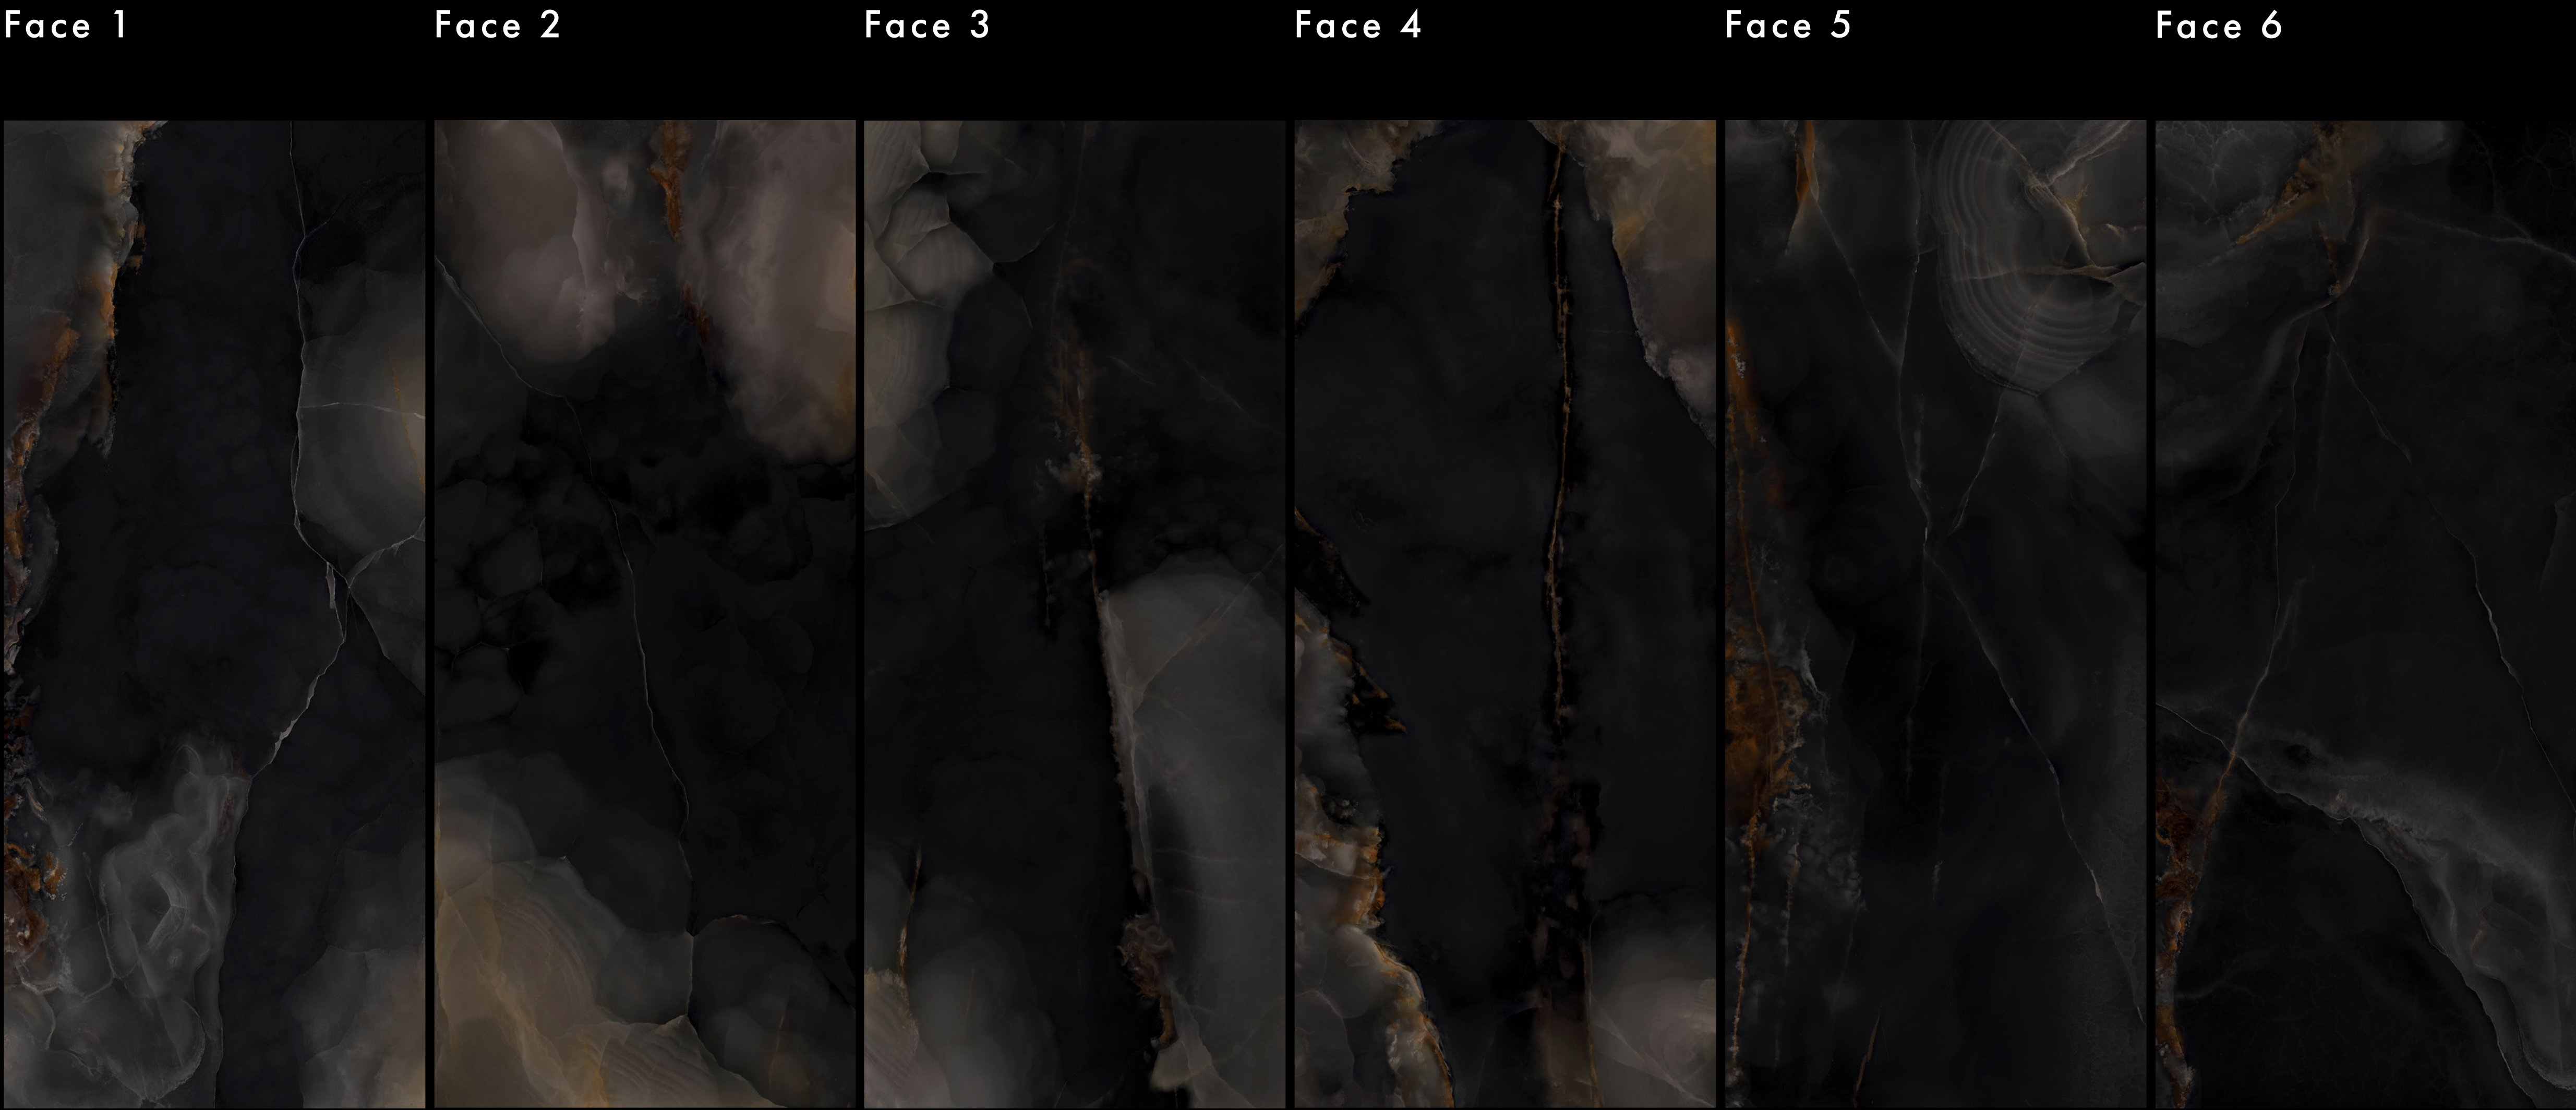



Via Onice
Klimt

Face 1

Face 2

Face 3

Face 4





Via Onice - Malaga

Via Onice
Malaga

Face 1



Face 2



Face 3



Face 4



Face 5




Face 6





Via Onice - Puro


Via Onice
Puro

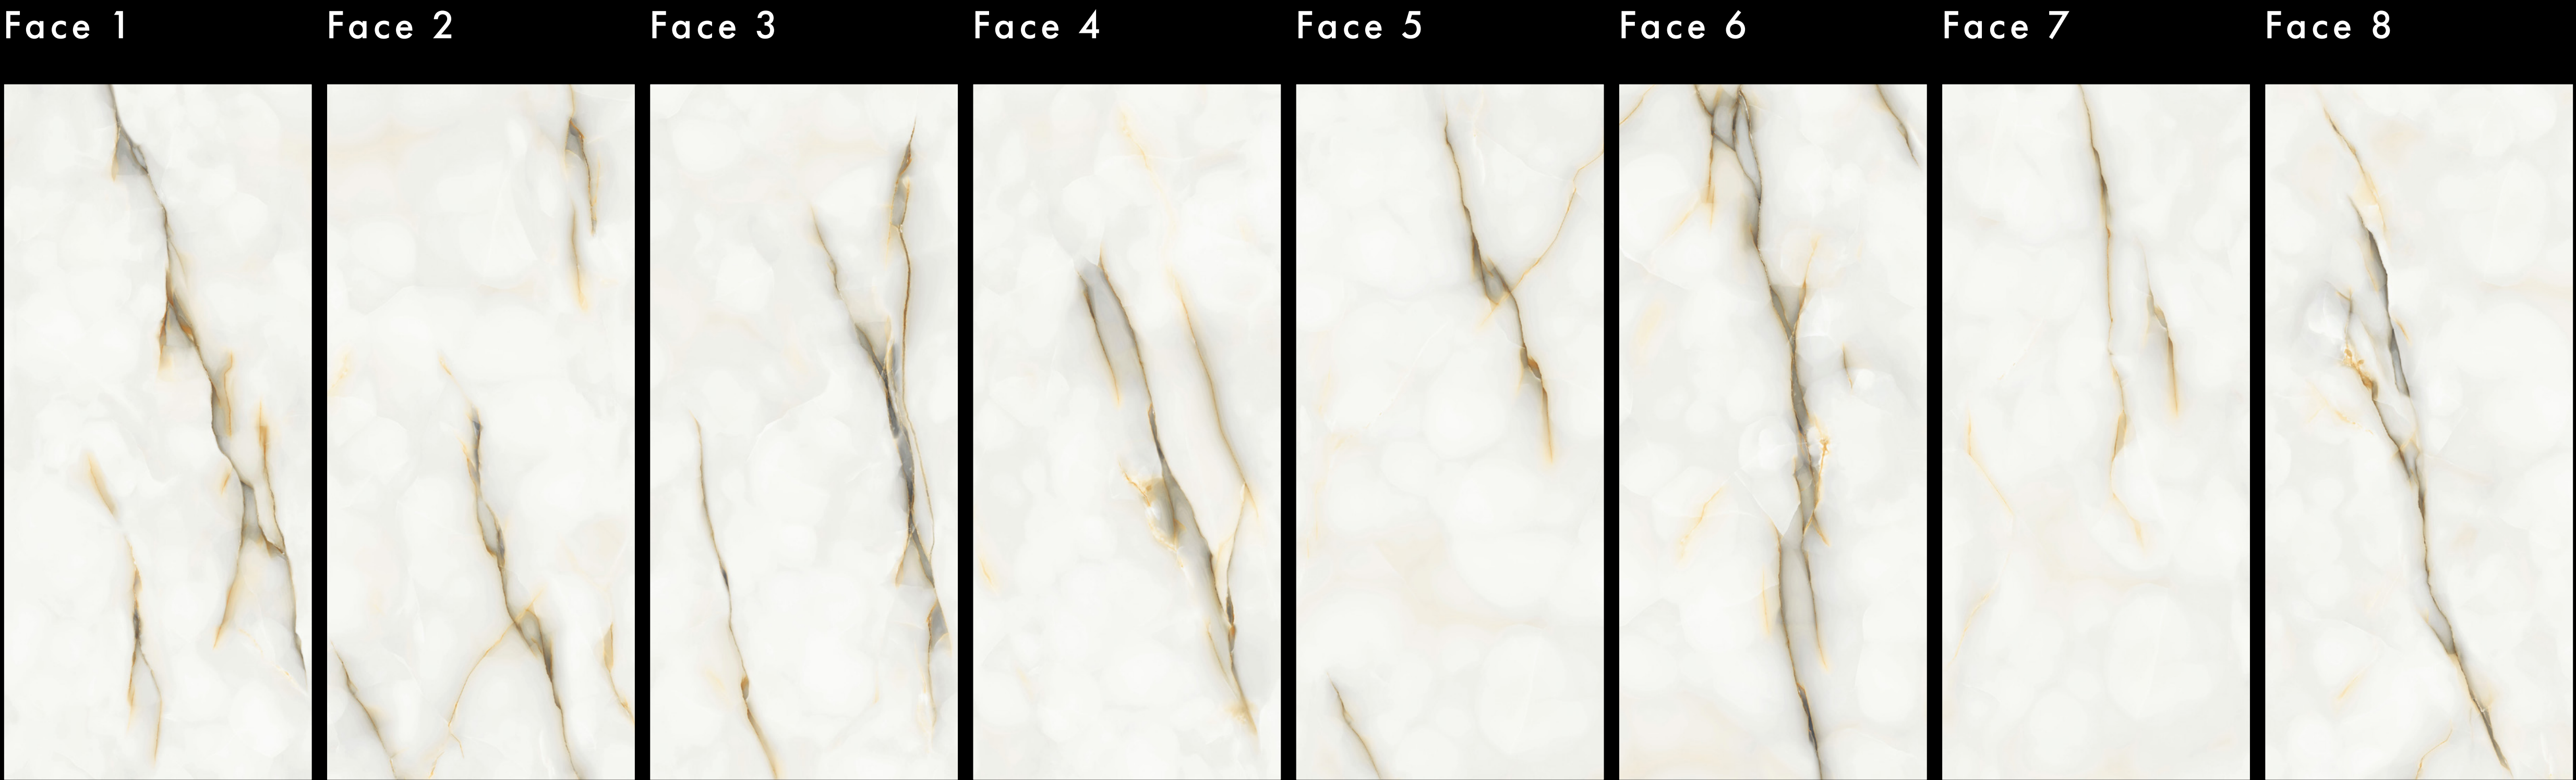



Via Onice - Smeraldo


Via Onice
Smeraldo

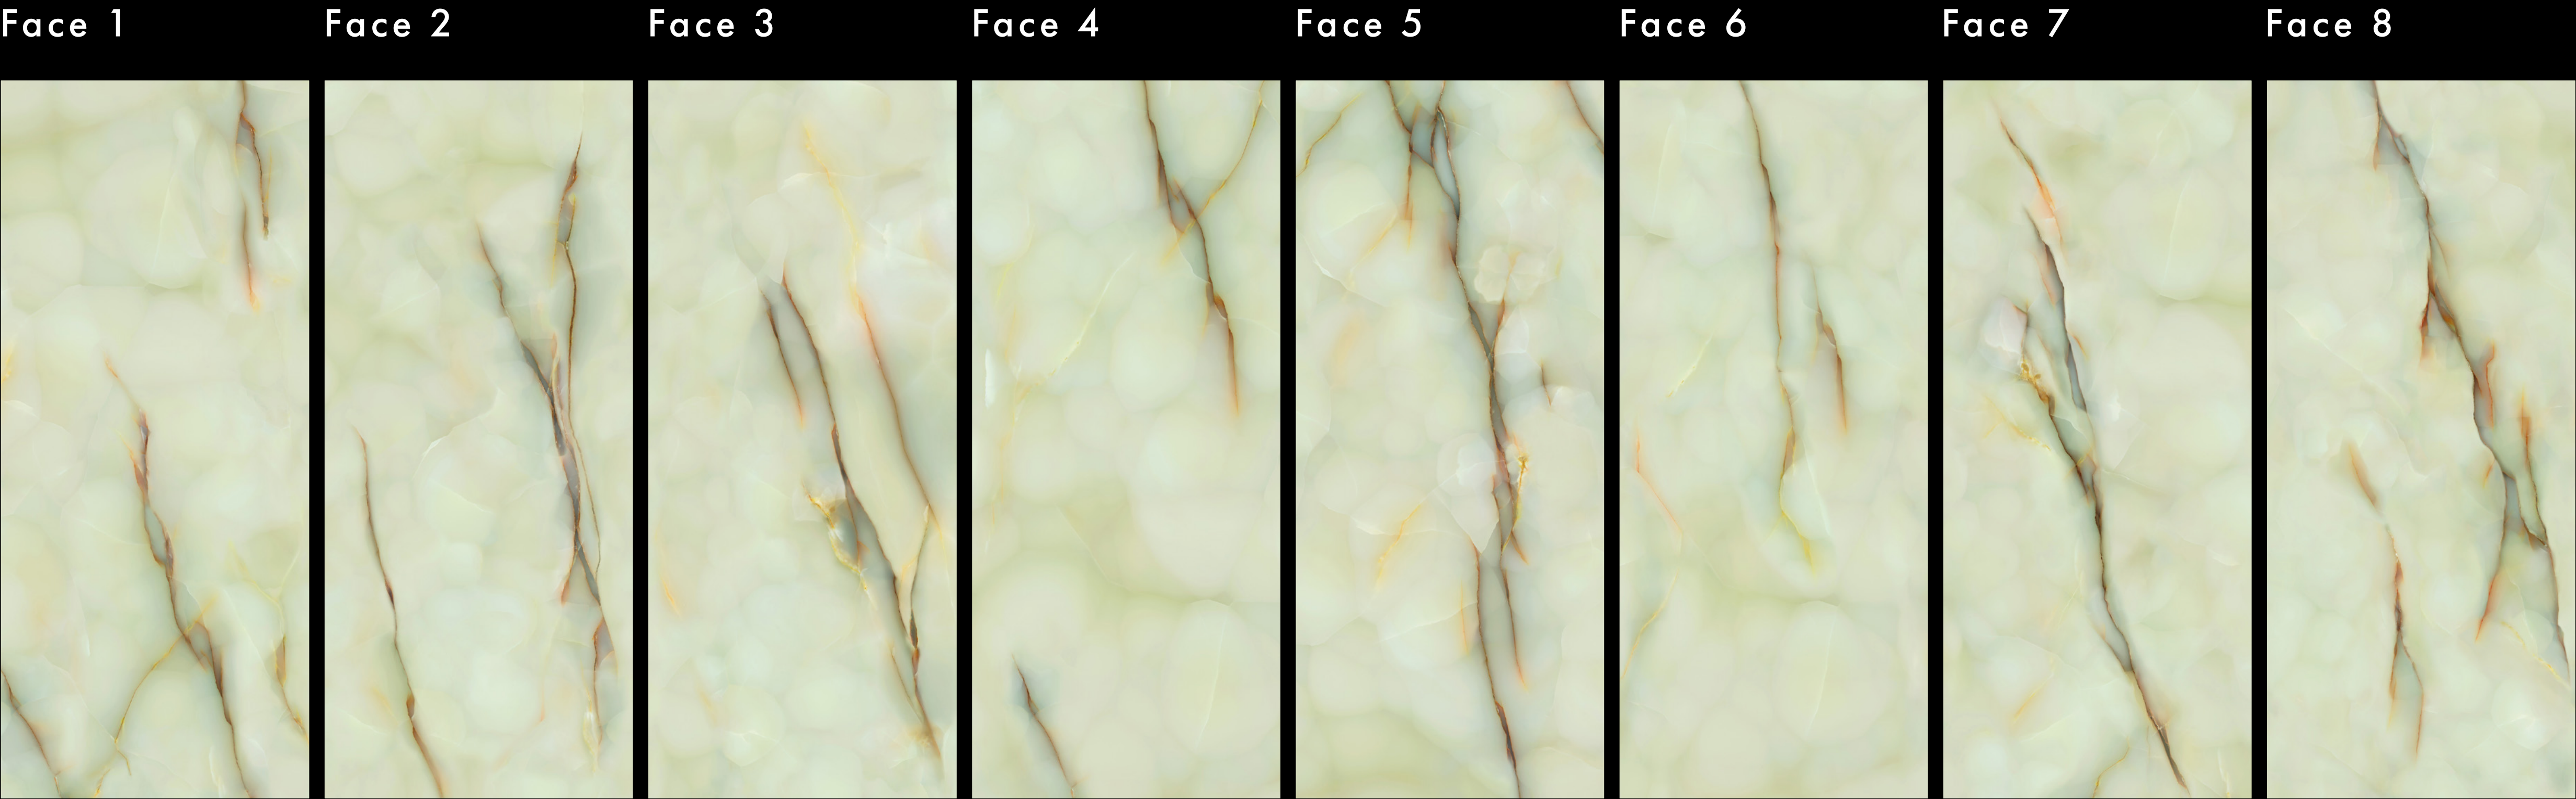



Via Onice - Sodalite

Via Onice
Sodalite

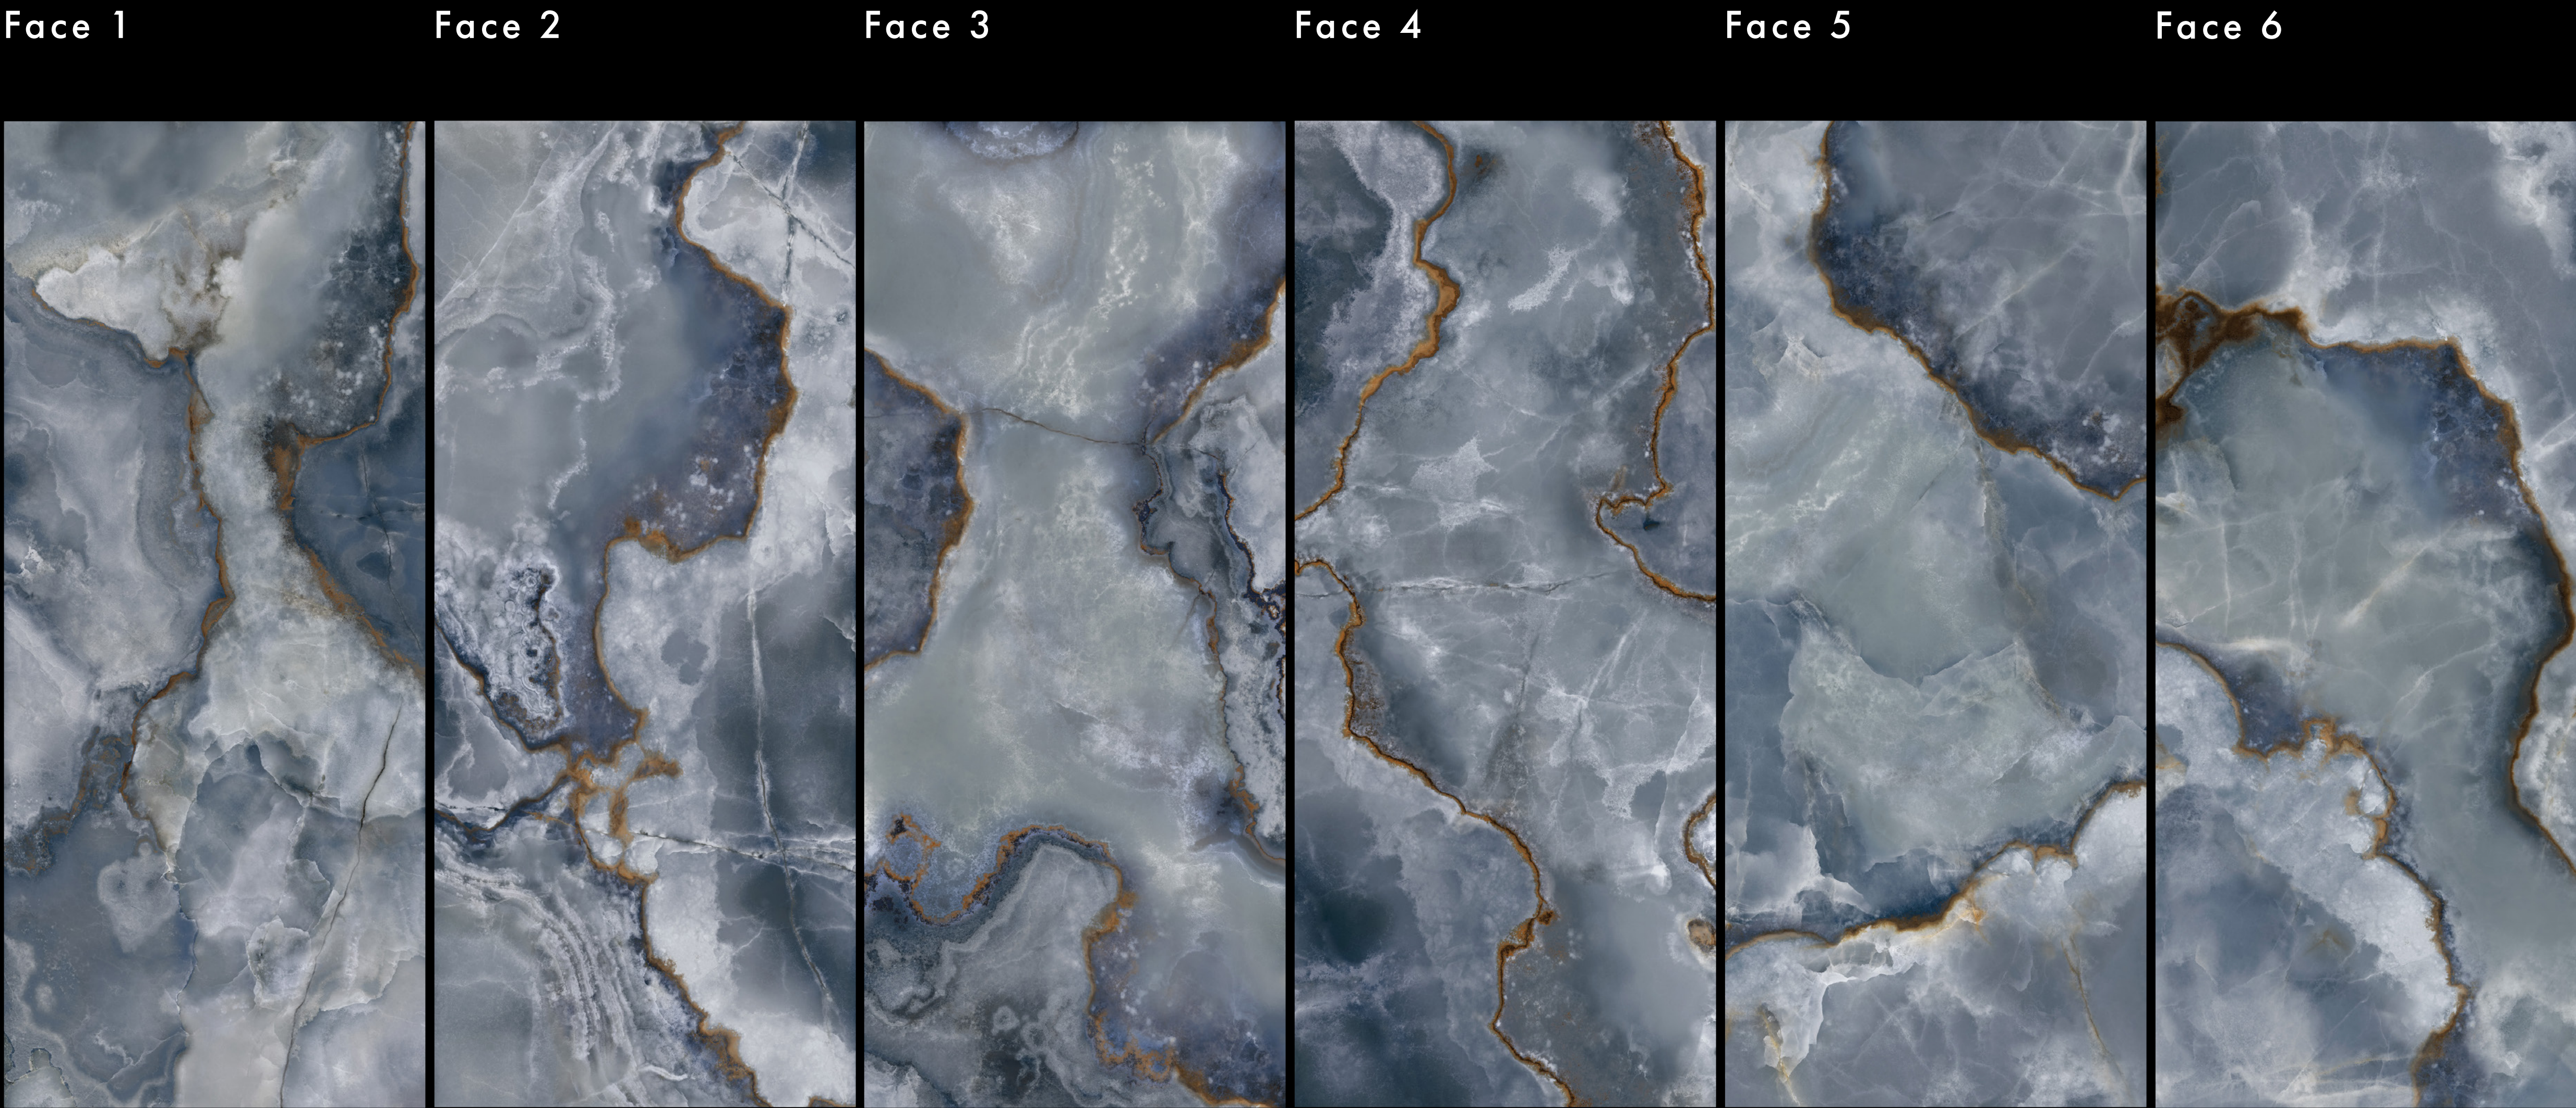



Via Onice
Violet



Colours




Bright



Klimt



Cyan

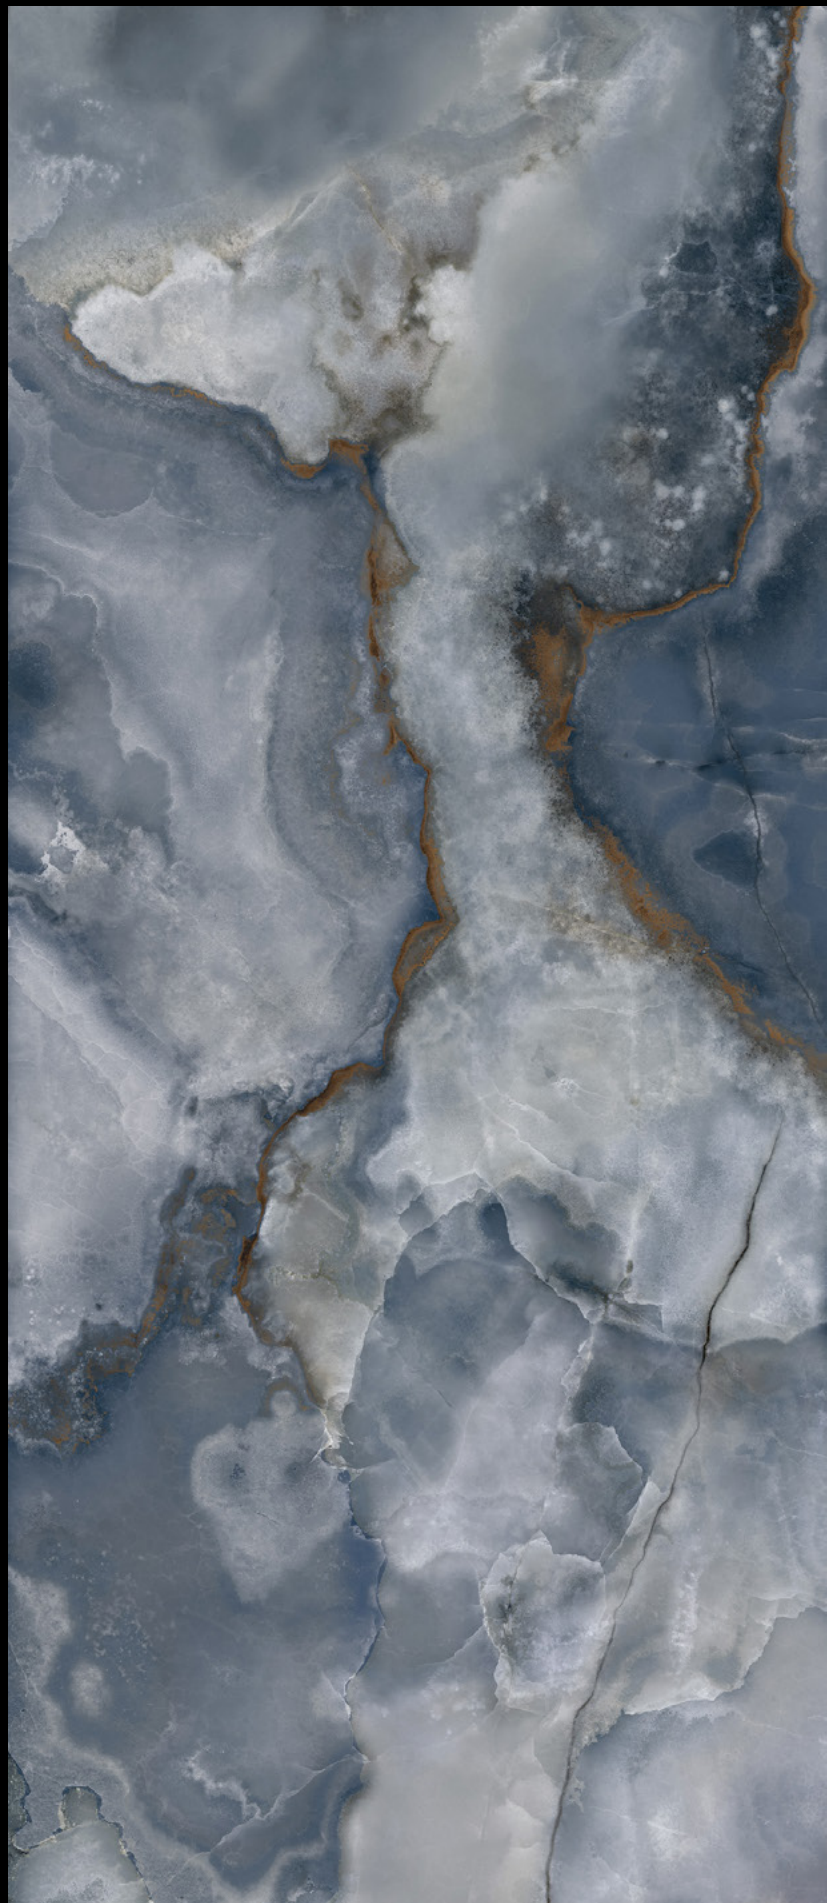

Sodalite



Jet


Colours



Puro



Malaga

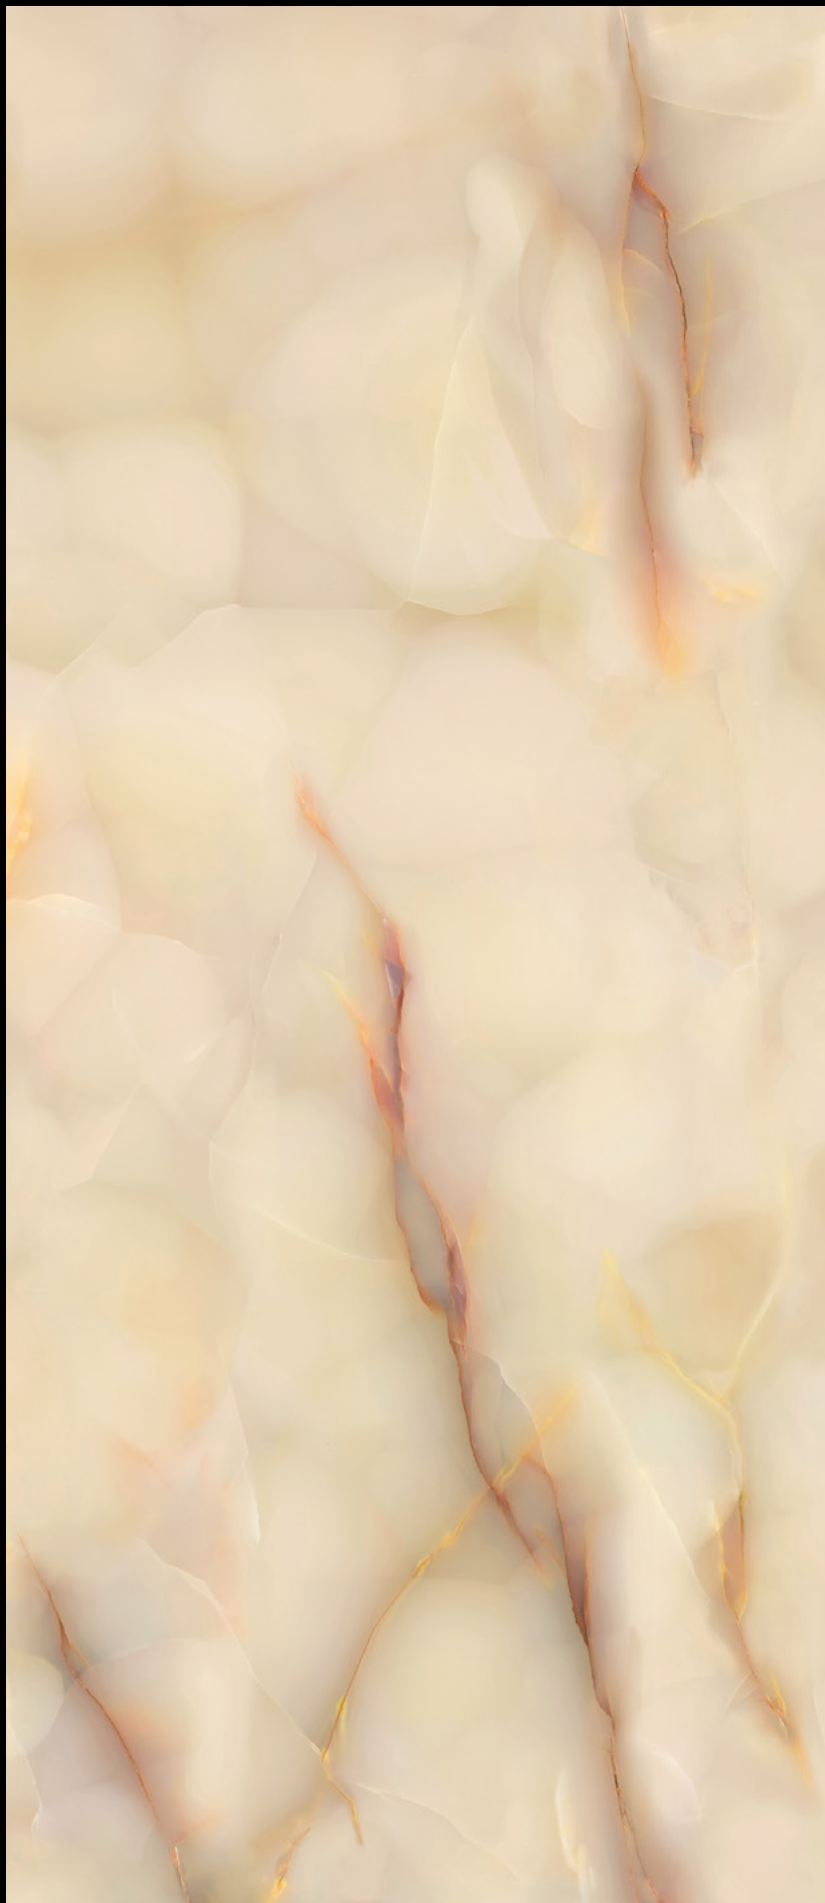

Dolce



Smeraldo




Violet

Colours

COLOUR	FINISH	SIZE(MM)
Puro	Natural	1200 x 2780 x 6
Bright Cyan Dolce Jet Klimt Malaga Puro Smeraldo Sodalite Violet	Polished	1200 x 2780 x 6
Bright	Polished	900 x 1800 x 10
Puro	Natural	900 x 1800 x 9
Puro	Polished	900 x 1800 x 9
Puro	Natural	1200 x 1200 x 9
Puro	Natural	1200 x 1200 x 6
Bright Cyan Dolce Jet Malaga Puro Smeraldo Sodalite Violet	Polished	1200 x 1200 x 6
Bright Cyan Jet Sodalite	Natural R10	600 x 1200 x 9.5
Dolce Malaga Puro Smeraldo Violet	Natural R10	600 x 1200 x 9
Dolce Malaga Puro Smeraldo Violet	Polished	600 x 1200 x 9
Bright Cyan Jet Klimt Sodalite	Polished	600 x 1200 x 9.5
Bright Cyan Jet Sodalite	Polished	900 x 900 x 9.5
Dolce Malaga Puro Smeraldo Violet	Natural R10	300 x 600 x 9
Bright Cyan Jet Sodalite	Natural R10	300 x 600 x 9.5
Dolce Malaga Puro Smeraldo Violet	Polished	300 x 600 x 9
Bright Cyan Jet Klimt Sodalite	Polished	300 x 600 x 9.5

Size Guide (mm)

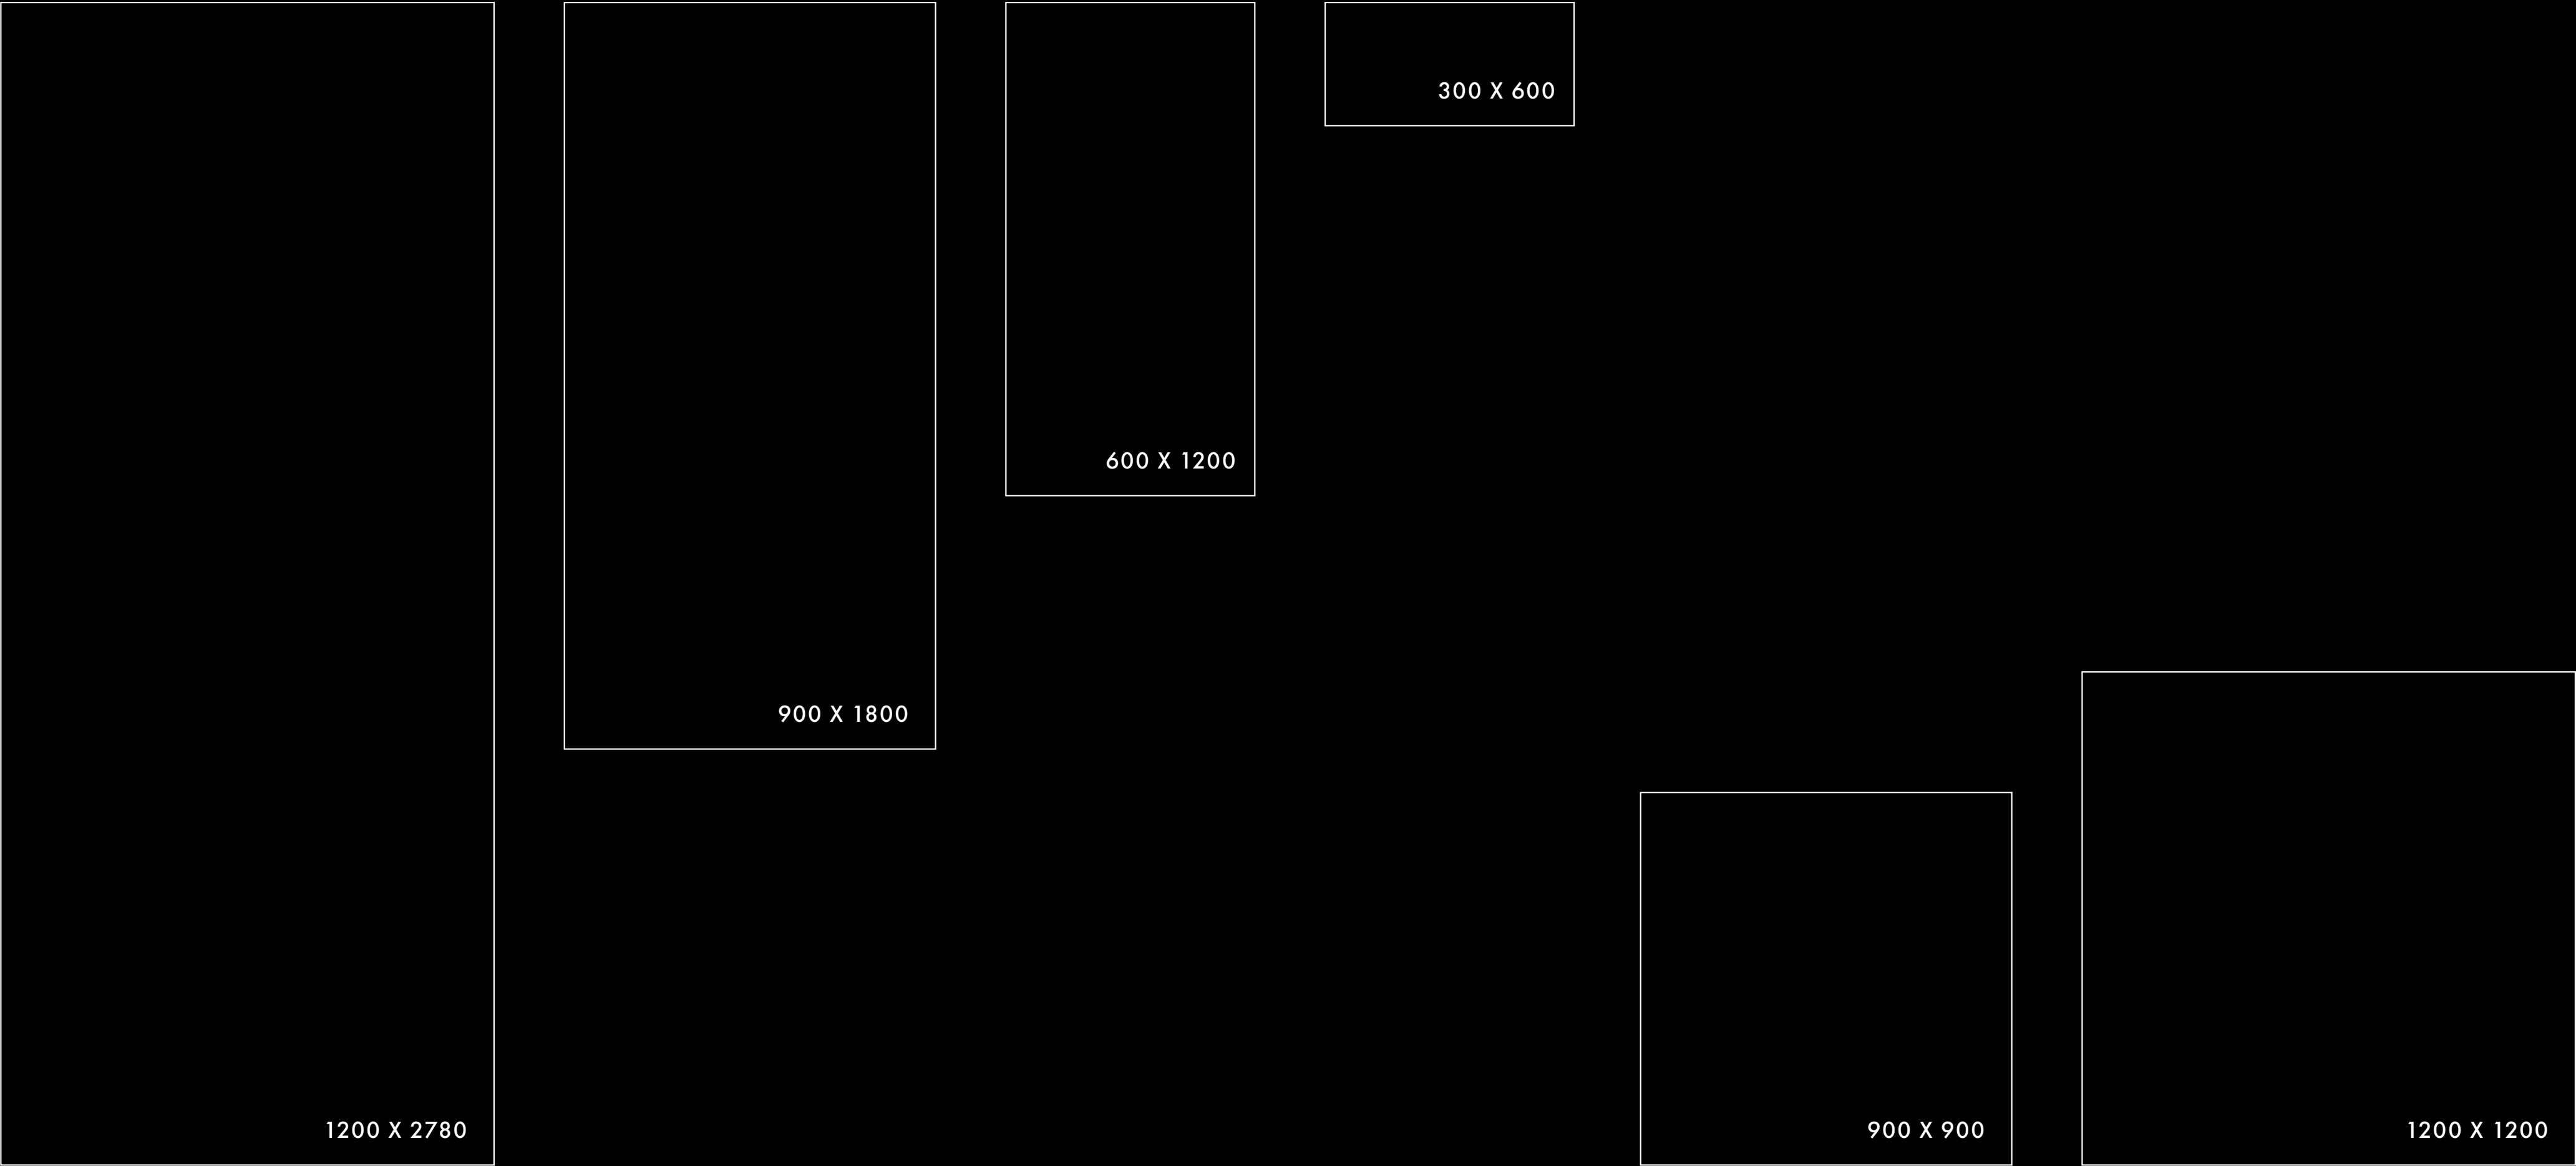

SPECIAL PIECES & MOSAIC

Colour

Bright | Cyan | Jet | Sodalite

Dolce | Malaga | Puro | Smeraldo | Violet

Bright | Cyan | Jet | Sodalite

Dolce | Malaga | Puro | Smeraldo | Violet

Bright | Cyan | Jet | Klimt | Sodalite

Finish

Polished

Natural R10

Natural R10

Polished

Polished

Size (MM)

46 x 900 x 9.5

70 x 600 x 9

70 x 600 x 9.5

70 x 600 x 9

70 x 600 x 9.5

Special Piece

Skirting Tile

Skirting Tile

Skirting Tile

Skirting Tile

Skirting Tile




Via Onice - Sodalite & Bright

Technical Details

TECHNICAL DATA	STANDARD	REQUIREMENT	COLLECTION VALUE
Length And Width	ISO 10545-2	± 0.6% Max	± 0.6%
Thickness	ISO 10545-2	± 5% Max	± 5%
Linearity	ISO 10545-2	± 0.5% Max	± 0.5%
Wedging	ISO 10545-2	± 0.5% Max	± 0.5%
Warpage	ISO 10545-2	± 0.5% Max	± 0.5%
Water Absorption	ISO 10545-3	≤ 0.5 %	≤ 0.1%
Deep Abrasion Resistance	ISO 10545-7	Testing Method Available	2-5
Coefficient Of Linear Thermal Expansion	ISO 10545-8	≤ 9x10-6 °C-1	≤ 9x10-6 °C-1
Resistance To Thermal Shocks	ISO 10545-9	Testing Method Available	Resistant
Frost Resistance	ISO 10545-12	Must Not Produce Noticeable Alteration To Surface	Conforms
Chemical Resistance	ISO 10545-13	Testing Method Available	On Request
Stain Resistance	ISO 10545-14	Testing Method Available	Resistant To Stain
Colour Resistance To Light	DIN 51094	Must Not Produce Noticeable Colour Variation	Conforms

Shade Tone Variance

Shade, texture and tone can vary from piece to piece within a single tile production run. V1 shade tone variation has little or no change from piece to piece where a V4 might have a substantial variety of shade, texture and tone variation.

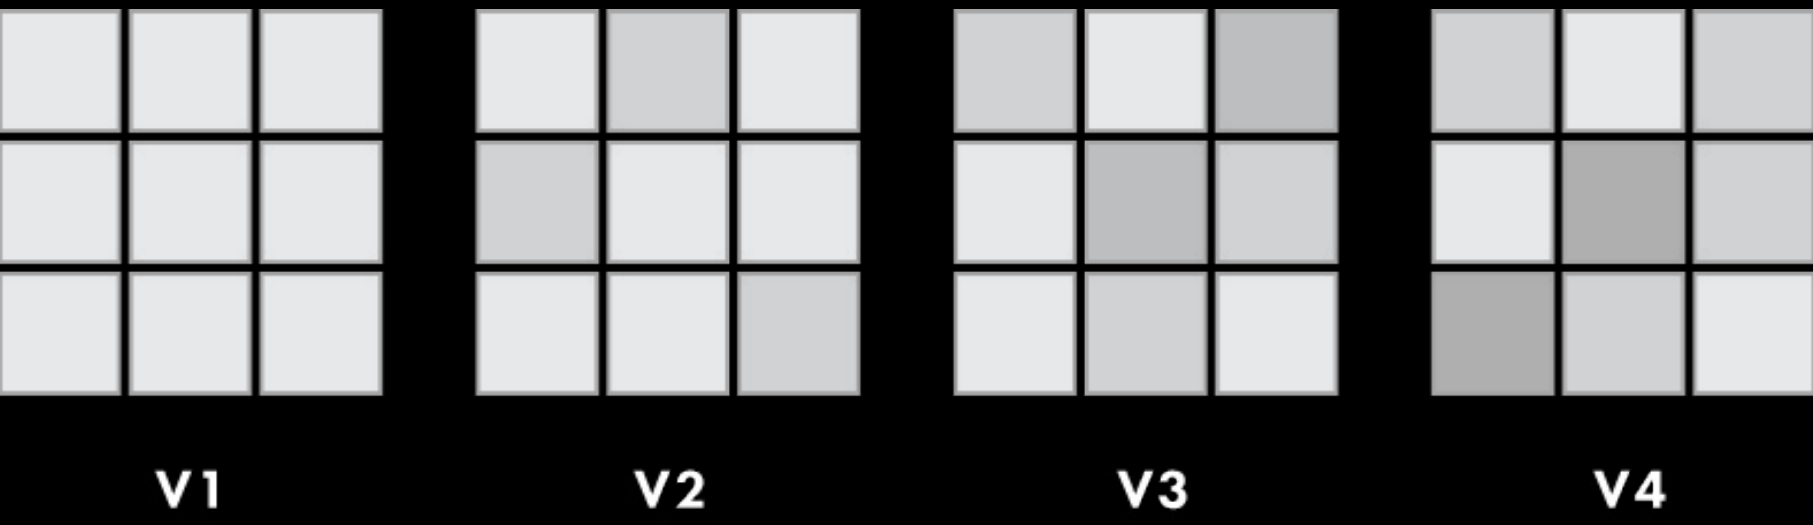

Variance Rating	Description
V1	Uniform Appearance
V2	Slight Variation
V3	Moderate Variation
V4	Substantial Variation

COLOUR	VARIANCE
Bright	V3
Cyan	V3
Dolce	V3
Jet	V3
Klimt	V3
Malaga	V3
Puro	V3
Smeraldo	V3
Sodalite	V3

Ramp Test Values (DIN 51130)

DIN Standard Ramp Testing (DIN 51130) is an alternative to Pendulum Testing and generally categorised as an ‘off-site’ activity because of the size and complexity of the equipment required to carry out the test. The Slip Resistance Values (RSV) are factory gate values (based on supplied tiles) and categorised using the Ramp Test (DIN 51130) method which is commonly used by European factories. In this method, a lubricated inclined platform is adjusted to a gradually increasing gradient, and the angle is measured at which a person walking on it slips.

R Rating Value	Friction
R9	Minimal
R10	Normal
R11	Good
R12	Good
R13	Very High

COLOUR	FINISH/STYLE	R Rating Value	Friction
Bright	Natural R10	R10	Normal
Cyan	Natural R10	R10	Normal
Dolce	Natural R10	R10	Normal
Jet	Natural R10	R10	Normal
Malaga	Natural R10	R10	Normal
Puro	Natural	R9	Minimal
Puro	Natural R10	R10	Normal
Smeraldo	Natural R10	R10	Normal
Sodalite	Natural R10	R10	Normal
Violet	Natural R10	R10	Normal

Environmental Certification



LEED® certification provides independent, third party verification that a building project meets the highest green building and performance measure. All certified projects receive a LEED® plaque, which is nationally recognised symbol demonstrating that a building is environmentally responsible, profitable and a healthy place to live and work. The environmental characteristics have been evaluated and found according to the requirements of content of recycled material for environmental assessment according to LEED® criteria. These products contribute to the increase in the LEED® rating of buildings where they are used.



The EU Ecolabel helps you identify products and services that have a reduced environmental impact throughout their life cycle, from the extraction of raw material through to production, use and disposal. Recognised throughout Europe, EU Ecolabel is a voluntary label promoting environmental excellence which can be trusted. Ecolabel certification applies to building products such as ceramic tiles for residential and public flooring and wall-covering. The commission in charge of the certification system measures the environmental impact caused by the entire productive cycle in the case of ceramic tiles, the verification starts from raw material quarrying through to manufacturing, distribution, installation and their final disposal. Our factories conform and are certified by the European Community standard Ecolabel and the production process is in complete harmony with the Ecolabel certification.



GREENGUARD Certification ensures that a product meets stringent standards for minimal emissions of volatile organic compounds (VOCs) into indoor air. This program provides assurance that products designed for indoor use adhere to strict chemical emissions limits, fostering the creation of healthier interiors. Manufacturers with GREENGUARD Certification gain credibility for their sustainability claims, supported by empirical technical data from an unbiased third-party organisation. The GREENGUARD Certification Program instills confidence by ensuring that indoor products meet strict chemical emissions limits, contributing to the creation of healthier interior spaces. This empowers manufacturers to produce and customers to identify products with low chemical emissions, thereby supporting air quality and environmental well-being.



NSF® has facilitated the development of more than 75 standards and protocols for sanitary food equipment, and has certified thousands of products as safe to use in restaurant and commercial kitchen settings. NSF® food equipment standards include requirements for material safety, design, construction and product performance. The products conform to the requirements of NSF/ANSI Standard 51 – Food Equipment Materials. NSF/ANSI 51 establishes minimum public health and sanitation requirements for materials and finishes used in the manufacture of commercial foodservice equipment



An Environmental Product Declaration (EPD) is a concise document that transparently communicates the environmental performance of a product throughout its life cycle. It provides comprehensive information about the product's environmental impact, including aspects such as raw material extraction, production processes, energy consumption, and emissions. EPDs are based on standardised methodologies and enable consumers, businesses, and policymakers to make informed decisions by considering the environmental aspects of a product in a systematic and comparable way.



P O R C E L A I N T I L E S

North London Showroom
23 Temple Fortune Parade
Finchley Road
London NW11 0QS
020 3141 3337

www.porcelaintiles.co.uk

South London Showroom
88 High Street Wimbledon
London SW19 5EG
020 3141 3337

enquiry@porcelaintiles.co.uk