

# PORCELAIN TILES

STANDARD PRODUCT DATA SHEETS

NOW Imagine

#### **KITCHEN (CUCINA COLLECTION)**

Kitchen Island Island panels for installation over cabinetry/base unit

Kitchen Island Waterfall Free-standing Island worktop with waterfall

Kitchen Island Countertop Island worktop with overhang

Standard Kitchen Countertop Standard kitchen worktop

**Countertop Edge Profiles** Options for worktop edge profiles

**Countertop Options** Cut-outs, integrated sinks & tap holes

Kitchen Splashback/Upstand Custom size splashback or upstand

**Kitchen Breakfast Bar** Wall-mounted breakfast bar

Kitchen Shelf Wall-mounted configurable shelf unit

TablewareLuxury serving tray & coaster set

## **BATHROOM (CASA COLLECTION)**

**Gemini** Surface-mounted single washbasin

**Libra** Wall-mounted single washbasin

**Leo** Wall-mounted washbasin

**Capricorn** Wall-mounted double washbasin

**Scorpio** Double trough wall-mounted washbasin

Vanity Top Wall-mounted vanity top for vessel basin

**Virgo** Wall-mounted vanity top with storage

Vanity Top with Cut-out Vanity top for drop-in basin

Vanity Shelf Configurable wall-mounted vanity shelf

**Globo** Bathroom storage unit

**Venus** Free-standing single washbasin **Saturn** Luxury free-standing double basin

**Mercury** Free-standing trough washbasin

**3D Mirror** Three dimensional vanity mirror

**Shower Tray** Low profile tray with drainage system

## **DINING, COFFEE & CONSOLE TABLES**

Tavolo Table Tops Luxury table tops

**TOV-BP101 Ellipse Pedestal Base** Ellipse pedestal base with strip decoration

**TOV-BP201 Rectangular Pedestal Base** Rectangular pedestal base with Greca decoration

**TOV-BP301 Rectangular Pedestal Base** Rectangular pedestal base with fluted decoration

### PLINTHS / SEATING

**Podium** Four and six sided plinth

#### CUT-TO-SIZE

Cut-to-size Custom cut-to-size service

**Cut-to-shape** Custom shapes & profile service

**Skirting** Skirting board

Nosing Steps Configurable tread nosing

## ADDITIONAL INFORMATION


**Composite Structure** Fabrication information

**Product** Preparation, fixing & plumbing

**Ordering** Process & lead time

**Contact Details** Contact us for more information




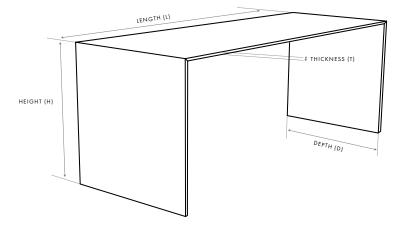

ltem	Kitchen Island		
Description	Island panels for installation over cabinetry/base unit		
Pricing	Price per square metre		
Colour	<b>TM<sup>12</sup></b> Collection (40 Colours)	<b>TM<sup>20</sup></b> Collection (15 Colours)	
Approximate weight	29 kg per m²	40 kg per m²	
Finish	[Natural ][Polished ][Honed ]	Availability dependant on chosen surface colour.	
<b>Overhang</b> (with/without cut-out)	90/200 mm	200/300 mm	
Length (L)	∞ (joint every 3200 mm)*	∞ (joint every 3200 mm)	
Depth (D)	[ 651 - 1500 mm ]*		
Thickness (T)	[ 12 mm ][ 20 mm ]		
Height (H)	[ 910 mm ][ Custom height ]		
Front/Rear panels	[ ]		
Cabinet doors	[ N/A ][ Cladded ]		
Edge profile	See "Countertop Edge Profiles"		
Configurable options	Configurable options including hob/sink cut-outs & tap holes see "Countertop Options".		
Note	This product requires laser temp	lating and installation charged separately. Base unit not supplied.	

 $^{\star}$  Dependant on vein matching and top thickness.



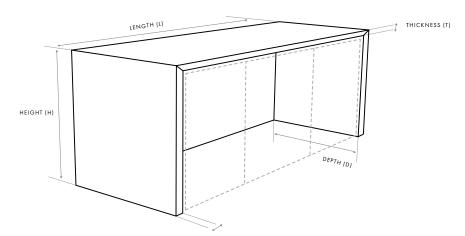

Item	Kitchen Island Waterfall			
Description	Free-standing Island worktop w	vith waterfall		
Pricing	Price per square metre			
Colour	TM <sup>6</sup> Collection (150 Colours)	TM <sup>12</sup> Collection (40 Colours)		
Approximate weight	26 kg per m²	40 kg per m²		
Finish	[Natural ][Polished ][Honed ]	Availability dependant on chosen surface colo	our.	
Length (L)	∞ (joint every 3000 mm)*		* Dependant on vein matchin	ng and top thicknes
Depth (D)	[ 651 - 1500 mm ]			
Thickness (T)	[ 40 - 100 mm ]			
Height (H)	[ 910 mm ][ Custom height ]			
Sides	[1][2]			
<b>Overhang (O)</b> (with/without cut-out)	200/400 mm	90/200 mm		
Edge Profile	Mitred edge. All sides and visib	ole surfaces are finished.		

# FRONT FACE CONFIGURATION


Front face [Vertical]

[Decline]

Front face angle [90°]

[45°]




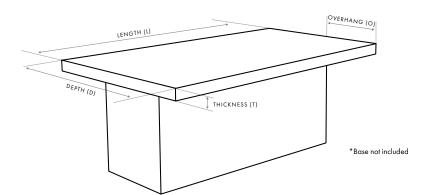

ltem	Kitchen Island Countertop			
Description	Island worktop with overhang			
Pricing	Price per square metre			
Thickness (T)	40-100 mm 12 mm 20 mm			
Colour	TM <sup>6</sup> Collection (150 Colours)	TM <sup>12</sup> Collection (40 Colours)	<b>TM<sup>20</sup></b> Collection (15 Colours)	
Guide price	Contact Tailor-made for pricing			
Length (L)	∞ (joint every 2900 mm)*	∞ (joint every 3200 mm)	∞ (joint every 3200 mm)	
Depth (D)	651-1400 mm*	651-1500 mm	651-1500 mm	
Approximate weight	26 kg per m²	40 kg per m²	56 kg per m²	
Finish	[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.			
<b>Overhang (O)</b> (with/without cut-out)	200/400 mm	90/200 mm	200/300 mm	
Configurable options	Configurable options including cut-outs and tap holes see "Countertop Options".			
Note	Templating, packaging, delivery	y and installation charged separat	ely.	

\* Dependant on vein matching and top thickness.




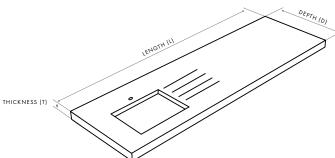

ltem	Standard Kitchen Countertop		
Description	Standard kitchen worktop		
Pricing	Price per linear metre		
Thickness (T)	40-100 mm	12 mm	20 mm
Colour	TM <sup>6</sup> Collection (150 Colours)	TM <sup>12</sup> Collection (40 Colours)	<b>TM<sup>20</sup></b> Collection (15 Colours)
Length (L)	∞ (joint every 3000 mm)*	∞ (joint every 3200 mm)	∞ (joint every 3200 mm)
Depth (D)	400-650 mm	400-650 mm	400-650 mm
Approximate weight	26 kg per m²	40 kg per m²	56 kg per m²
Finish	[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.		
<b>Overhang (O)</b> (with/without cut-out)	200/400 mm	90/200 mm	200/300 mm
Edge profiles		lied as standard with their front edg . Profiles for side and rear edges c	
Finished sides	[ ]		
Finished rear edge	[ ]		
Installation type	Standard kitchen countertops require level and secure support every 600 mm, around the perimeter frame, under any joints and around cut-outs. Please specify installation type.		
Configurable options	Options including sink and hob cut-outs & integrated sinks see "Countertop Options".		
Note	Templating, packaging, deliver	y and installation charged separat	ely.

\* Dependant on vein matching and top thickness.







## 40-100 mm THICKNESS COUNTERTOP EDGE PROFILES


ltem	Countertop Edge Profiles
Description	Options for worktop edge profiles
Edge profiles	The Mitred Apron Return is available from 40 mm thickness upwards.
Thickness ≥ 40 mm	[ Mitred Apron Return ]

## 12 mm / 20 mm THICKNESS COUNTERTOP EDGE PROFILES

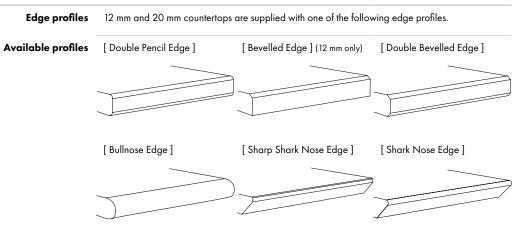


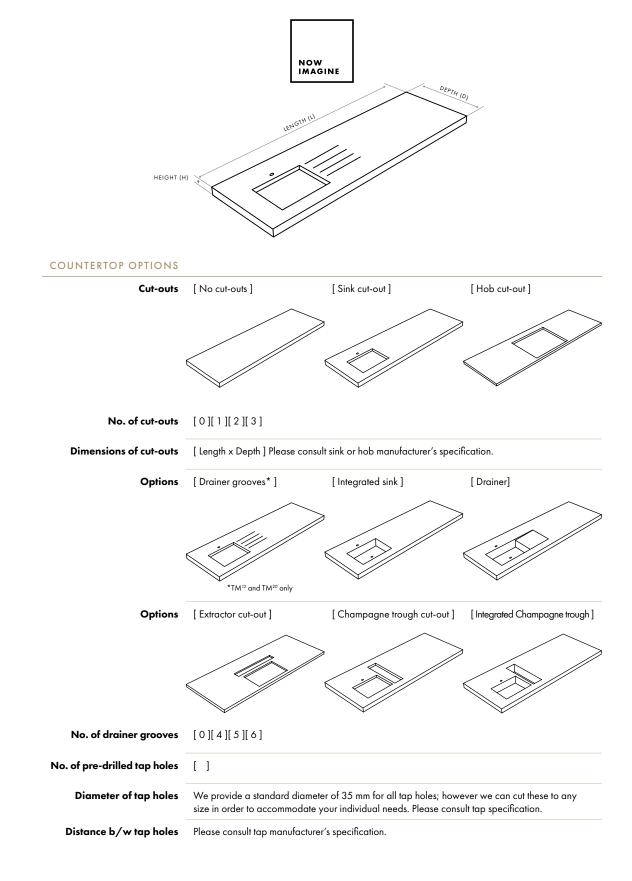



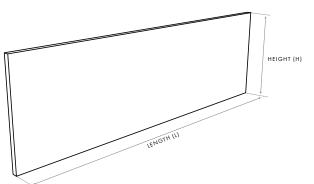

Item	Kitchen Splashback/Upstand		
Description	Custom size splashback or upstand		
Colour	TM <sup>6</sup> Collection (150 Colours)	TM <sup>12</sup> Collection (40 Colours)	
Shape	Any shape splashback possible at no extra cost.		
Top edge profile	See "Countertop Edge Profiles".		
Finish	[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.		
Dimensions (mm)	∞ (Lengths > 3000 mm will have a joint)		
Electrical socket cut-outs	[]		

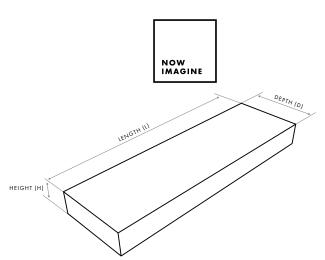

ltem	Kitchen Breakfast Bar
Description	Wall-mounted breakfast bar
Dimensions (mm)	Length (L): 700-3000 Height (H): 50-100 Depth (D): 300-600
Approximate weight (will be confirmed)	20-30 kg per linear metre

OPTIONS

Colour	TM <sup>6</sup> Collection (150 Colours)	<b>TM<sup>12</sup></b> Collection (40 Colours)
Finish	[ Natural ][ Polished ][ Honed ] Availability depe	ndant on chosen surface colour.
Profile	This item is supplied with a Mitred edge.	

# FRONT FACE CONFIGURATION

Front face	[ Vertical ]	[ Decline ]
Front face angle	[ 90° ]	[ 45° ][ 67.5° ]

HEIGHT	NOW IMAGINE	PRC
SPECIFICATION		_
Item	Kitchen Shelf	
Description	Wall-mounted configurable shelf unit	
Colour	TM <sup>6</sup> Collection (150 Colours) TM <sup>12</sup> Collection (40 Colours)	
Finish	[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.	
<b>Dimensions (mm)</b> (tolerance ±2 mm)	Length (L): 700-3000 Height (H): 40-50 Depth (D): 200-350	
<b>Approximate weight</b> (will be confirmed)	15 kg per linear metre	
OPTIONS		
Profile	This item is supplied with a Mitred edge.	_
No. of shelves	[]	

# FRONT FACE CONFIGURATION

Front face [Vertical]


[Decline]



Front face angle [90°]


[ 45° ][ 67.5° ]





ltem	Tableware		
Description	Luxury serving tray & coaster set		
-			
Colour	<b>TM<sup>6</sup></b> Collection (150 Colo	urs)	
Finish	[ Natural ][ Polished ][ Ho	ned ] Availability depend	dant on chosen surface colour.
Model	Coaster	Placemat	Chopping Board
Ellipse	0		
Rectangular			
Hexagon	$\bigcirc$		
Product code	TABLEWARE-COAST	TABLEWARE-PLACE	TABLEWARE-CHOP
<b>Dimensions (mm)</b> (approximate)	Length (L): 100 Depth (D): 100	320 240	400 300
Tableware 9 piece set	(4 coasters, 4 placemats,	(4 coasters, 4 placemats, 1 chopping board) (Product Code: TABLEWARE-9PCS)	
Approximate weight	0.25 kg	0.45 kg	0.55 kg
Thickness	6 mm		
Bottom face	Rubber pad		



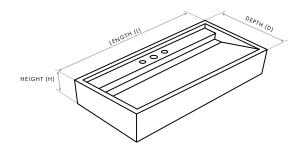


Lentearion	
ltem	Gemini
Description	Surface-mounted single washbasin
	Length (L): 450-1600 Height (H): 120-200 Depth (D): 400-650
Approximate weight (will be confirmed)	30 kg

## OPTIONS


Colour	TM <sup>6</sup> Collection (150 Colours)
Finish	[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.


Installation type	Surface-mounted		
Base type	[Fixed straight base ] [Fixed sloping base ]		
	250 200		
Waste	[ Chrome ][ Black ][ Brass ]	Hidden waste	
Tap mounting position	[ Wall-mounted ][ Surface-mo and model of the chosen tap s	ounted ] For surface-mounted installations, please provide the make system.	
No. of pre-drilled tap holes	[ ] Please consult tap manufacturer's specification.		
Diameter of tap holes	We provide a standard diameter of 35 mm for all tap holes; however we can cut these to any size in order to accommodate your individual needs.		
Distance b/w tap holes	Please consult tap manufacturer's specification.		



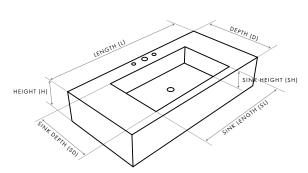

Item	Libra
Description	Wall-mounted single washbasin
Dimensions (mm) (tolerance ±2 mm)	Length (L): 450-2600 Height (H): 120-200 or 300-700 w/storage Depth (D): 400-650
Approximate weight (will be confirmed)	30-50 kg

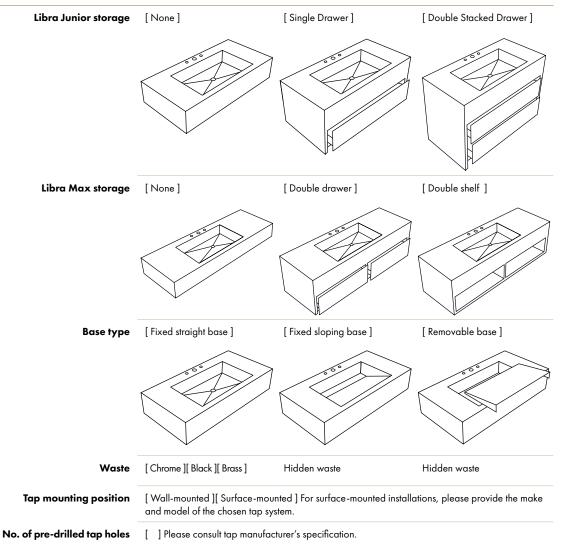

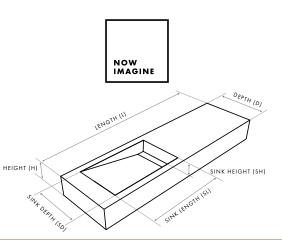


Item Leo

Description	Wall-mounted washbasin
<b>Dimensions (mm)</b> (tolerance ±2 mm)	Length (L): 1000-2600 Height (H): 120-300 or 350-500 w/storage Depth (D): 400-650
Approximate weight (will be confirmed)	40-50 kg


## OPTIONS


Colour	TM <sup>6</sup> Collection (150 Colours)
Finish	[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.

Junior storage options	[ Double Drawer ]	[Drawer & Shelf]	[Double shelf]
Max storage options	[Triple Drawer]	[Triple Shelf]	
Base type	[Fixed straight base ]	[Fixed side sloping base ]	[Fixed front sloping base ]
Waste	[ Chrome ][ Black ][ Brass ]	Hidden waste	Hidden waste
Cavity or Recess	Max models can be specified with a recess suitable for storing hand towels and toiletries or a cavity /opening for storage buckets, laundry baskets or waste bins.		
Tap mounting position	[ Wall-mounted ][ Surface-mou and model of the chosen tap sy	nted ] For surface-mounted install stem.	ations, please provide the make
No. of pre-drilled tap holes	[ ] Please consult tap manufac	cturer's specification.	

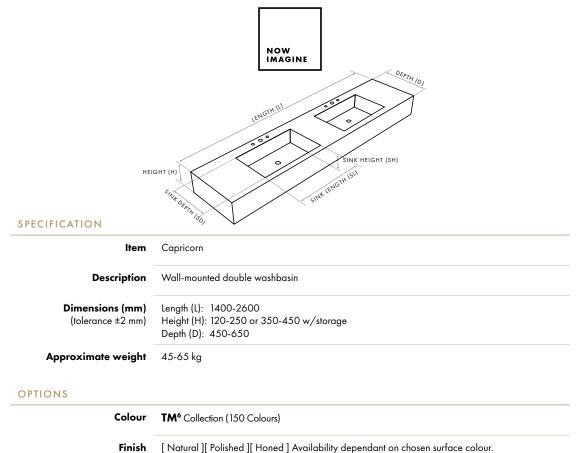

[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.

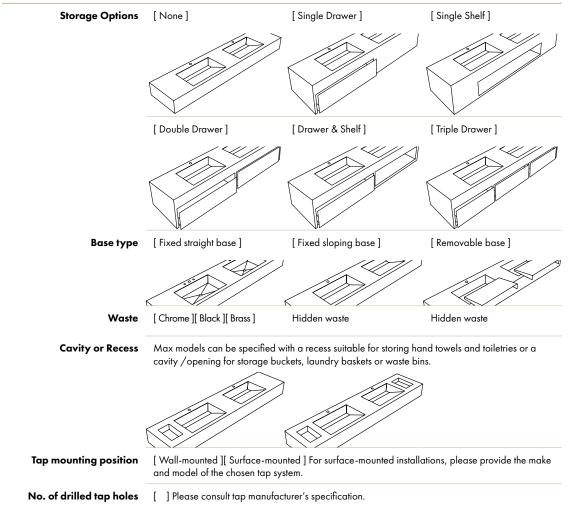

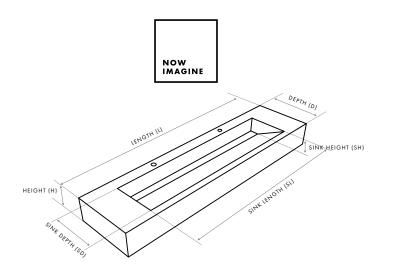

ltem	Scorpio
Description	Double trough wall-mounted washbasin
Dimensions (mm) (tolerance ±2 mm)	Length (L): 1200-2600 Height (H): 200-400 Depth (D): 450-650
Approximate weight (will be confirmed)	50 kg


OPTIONS

Colour TM<sup>6</sup> Collection (150 Colours)


Finish [Natural ][ Polished ][ Honed ] Availability dependant on chosen surface colour.

Base type	[ Fixed sloping base ]	[ Fixed straight base ]	
Waste	Hidden Waste	[ Chrome ][ Black ][ Brass ]	
Cavity or Recess	Max models can be specified with a recess suitable for storing hand towels and toiletries or a cavity /opening for storage buckets, laundry baskets or waste bins.		
Tap mounting position	[ Wall-mounted ][ Surface-mounted and model of the chosen tap system	d ] For surface-mounted installations, please provide the make n.	
No. of pre-drilled tap holes	[ ] Please consult tap manufacturer's specification.		
Diameter of tap holes	We provide a standard diameter of 35 mm for all tap holes; however we can cut these to any size in order to accommodate your individual needs.		
Distance b/w tap holes	Please consult tap manufacturer's specification.		


NOW INSCINE HEIGHT (H) HEIGHT (H) SPECIFICATION Magine Height T(H) Control Magine Height T(H) Control Height T(H) Control Migne Height T(H) Control Height T(H) Control Migne Height T(H) Control Height T(H) Control Migne Height T(H) Control Con	
SPECIFICATION  Item Vanity Top	
SPECIFICATION  Item Vanity Top	
SPECIFICATION  Item Vanity Top	
Item Vanity Top	
Item Vanity Top	
Item Vanity Top	
Description Wall-mounted vanity top for vessel basin	
	·.
· · · · · · · · · · · · · · · · · · ·	
Dimensions (mm) Length (L): 600-2600	
(tolerance ±2 mm) Height (H): 50-120 Depth (D): 400-650	
Approximate weight 15 kg per linear metre	
OPTIONS	
Colour TM <sup>6</sup> Collection (150 Colours)	
<b>Finish</b> [Natural ][Polished ][Honed ] Availability dependant o	n chosen surface colour.
WASTE CONFIGURATION	
No. of pre-drilled holes [ ]	
<b>Position of waste holes</b> Please consult tap manufacturer's specification.	
<b>Diameter of waste holes</b> Please consult tap manufacturer's specification.	
<b>Distance b/w waste holes</b> For double basins only (each tap station typically 500 m	m wide).
TAP CONFIGURATION	
Tap mounting position         [Wall-mounted][Surface-mounted] For surface-mounted and model of the chosen tap system.	ed installations, please provide the make
No. of pre-drilled tap holes [ ] Please consult tap manufacturer's specification.	
<b>Diameter of tap holes</b> We provide a standard diameter of 35 mm for all tap hol size in order to accommodate your individual needs.	les; however we can cut these to any
<b>Distance b/w tap holes</b> Please consult tap manufacturer's specification.	

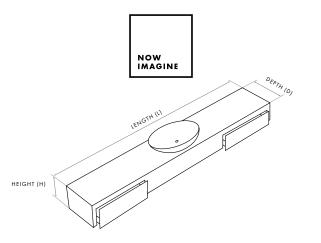

Item	Virgo	
Description	Wall-mounted vanity top with s	torage
Model	Single Drawer	Double Drawer
<b>Dimensions (mm)</b> (tolerance ±2 mm)	Length (L): 1401-2600 Depth (D): 400-650	
Top height (mm)	50-300 mm	
Drawer height (mm)	160-300 mm (Maximum draw	er length 780 mm)
Approximate weight	40-50 kg	
PTIONS		
Colour	TM <sup>6</sup> Collection (150 Colours)	
Finish	[ Natural ][ Polished ][ Honed ]	Availability dependant on chosen surface colour.
Decoration	[ Fluted Decor ][ None ]	
VASTE CONFIGURATION		
No. of pre-drilled holes	[]	
Position of waste holes	Please consult tap manufacture	's specification.
Diameter of waste holes	Please consult tap manufacture	's specification.
AP CONFIGURATION		
Tap mounting position	[ Wall-mounted ][ Surface-mou and model of the chosen tap sy	nted ] For surface-mounted installations, please provide the mak stem.
Io. of pre-drilled tap holes	[ ] Please consult tap manufa	cturer's specification.
Diameter of tap holes	We provide a standard diameter of 35 mm for all tap holes; however we can cut these to any size in order to accommodate your individual needs.	

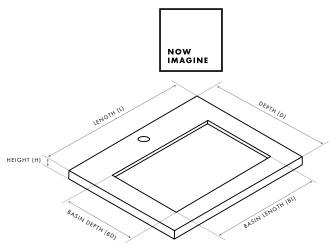


ltem	Vanity Top with Cut-out		
Description	Vanity top for drop-in basin		
Colour	<b>TM<sup>6</sup></b> Collection (150 Colours)	TM <sup>12</sup> Collection (40 Colours)	<b>TM<sup>20</sup></b> Collection (15 Colours)
Surface-mounted Height	40-100 mm	12 mm	20 mm
Wall-mounted Height	100-400 mm	N/A	N/A
Length (L)	600-2600 mm	∞ (joint every 3200 mm)	∞ (joint every 3200 mm)
Depth (D)	500-700 mm	500-700 mm	500-700 mm
Approximate weight	26 kg per m²	40 kg per m²	56 kg per m²
Edge profiles	Vanity tops are supplied as standard with their front and inner edges profiled. Sides and rear edges can also be specified.		
Profile	Mitred	[ Double Pencil ][ Bevelled ][ Do [ Bullnose ][ Half Bullnose ][ Sha	
Finished sides	[ ]		
Finished rear edge	[]		
Surface-mounted installation			
Wall-mounted installation		N/A	N/A
Basin cut-outs	[ 1 ][ 2 ][ 3 ] Please consult bas	in specification.	
Integrated basin	[ 1 ][ 2 ][ 3 ]		
Shape of cut-outs	[ Circular ][ Ellipse ][ Rectangul	ar ] Please consult basin specificat	ion.
Basin fitting type	[ Top-mounted ][ Under-mounte	ed ] Template to be provided by the	e client.
Pre-drilled tap holes	[ ] Please consult tap specification.		

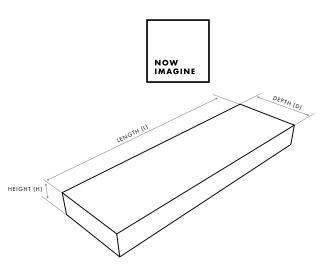



Item	Vanity Shelf
Description	Configurable wall-mounted vanity shelf
Model	Vanity Shelf Junior
Dimensions (mm) (tolerance ±2 mm)	Length (L): 600-2600 Height (H): 50-200 Depth (D): 400-650
Approximate weight	25 kg per linear metre
OPTIONS	
Colour	TM <sup>6</sup> Collection (150 Colours)

Finish [Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.

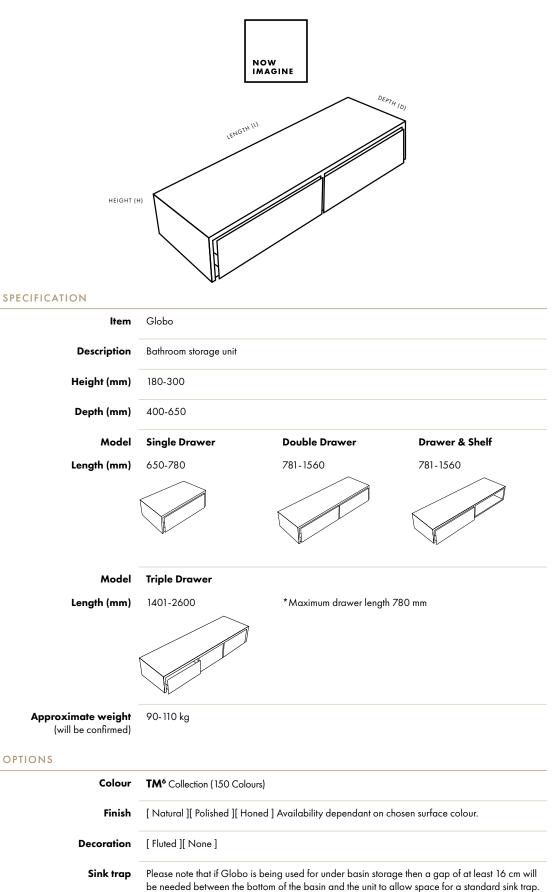

For gaps less than 16 cm an extra flat sink trap can be used.

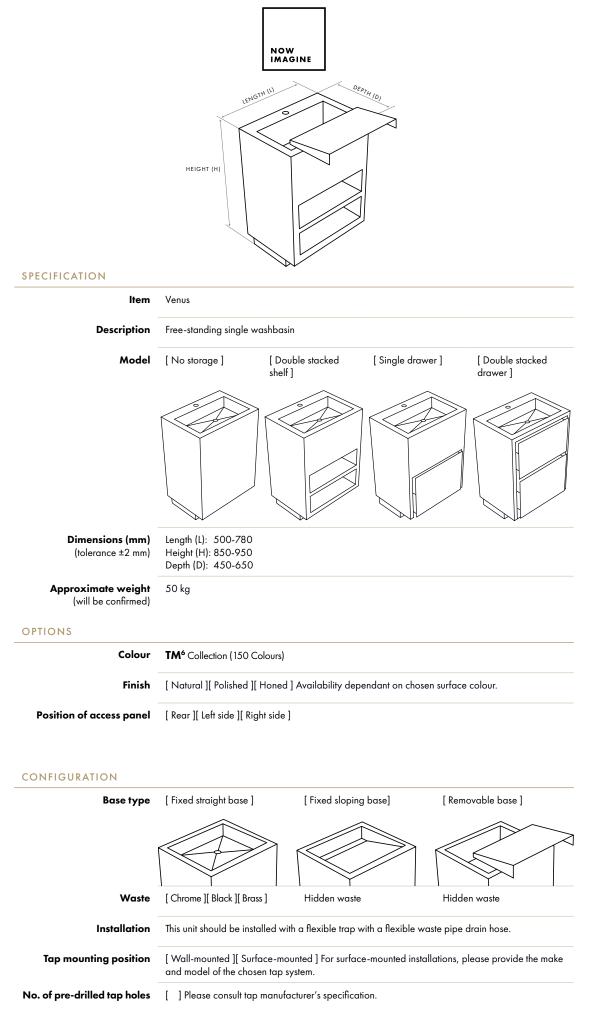

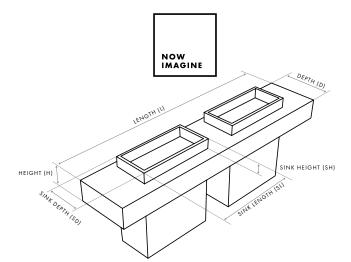



Item	Saturn
Description	Luxury free-standing double basin
Dimensions (mm)	Length (L): 1800-2200
(tolerance ±2 mm)	Height (H): 850-900
	Depth (D): 500-650
Approximate weight (will be confirmed)	120-150 kg


## OPTIONS

Base & sink colour	<b>TM<sup>6</sup></b> Collection (150 Colours)
Base & sink finish	[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.
Vanity top colour	TM <sup>6</sup> Collection (150 Colours)
Vanity top finish	[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.

Waste	[ Chrome ][ Black ][ Brass ]
Tap mounting position	[Wall-mounted ][Surface-mounted] For surface-mounted installations, please provide the make and model of the chosen tap system.
No. of pre-drilled tap holes	[ ] Please consult tap manufacturer's specification.
Diameter of tap holes	We provide a standard diameter of 35 mm for all tap holes; however we can cut these to any size in order to accommodate your individual needs.
Distance b/w tap holes	Please consult tap manufacturer's specification.
Position of access panels	[ Rear ][ Side ] (There is one access panel per sink unit)

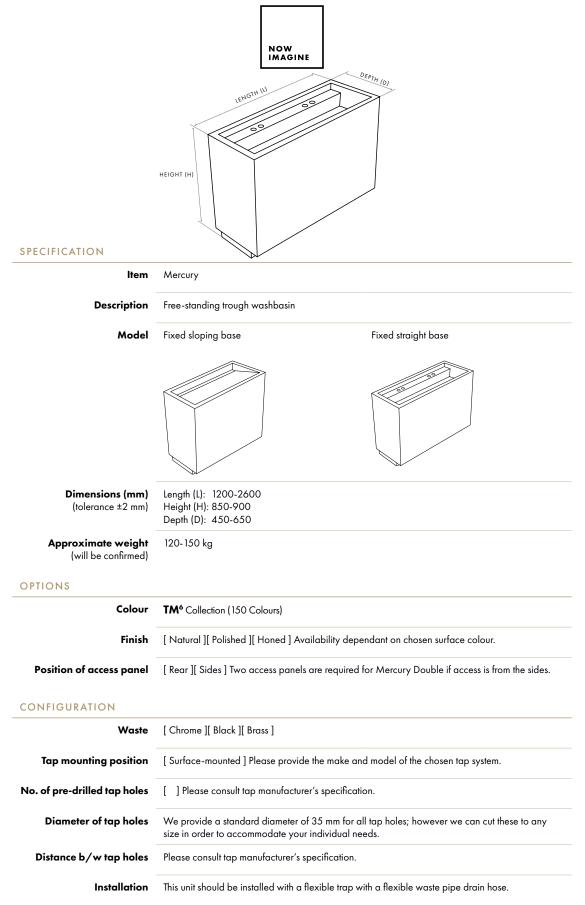

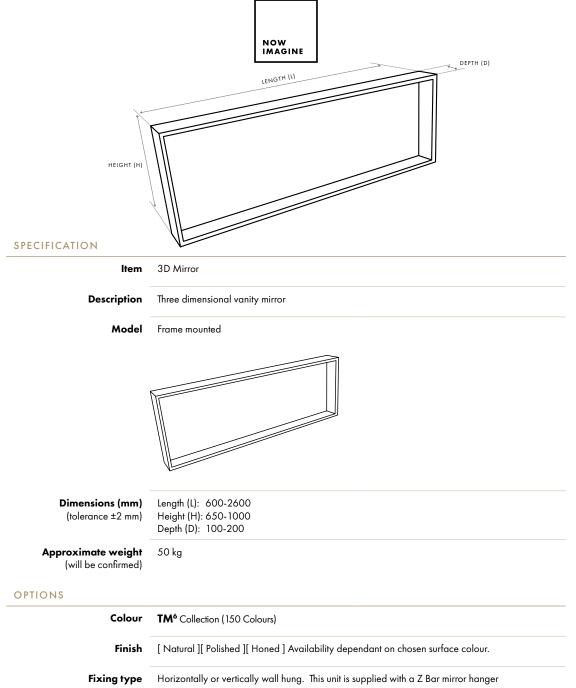


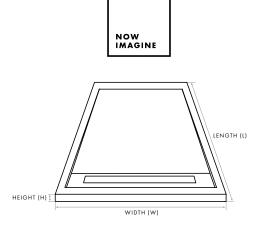

Item	Shower Tray		
Description	Low profile tray with drainage	system	
Model	SQ900	RECT 1200	RECT1500
<b>Dimensions (mm)</b> (tolerance ±2 mm)	Length (L): 900 Width (W): 900 Height (H): 70	Length (L): 1200 Width (W): 800 Height (H): 70	Length (L): 1500 Width (W): 850 Height (H): 70
Approximate weight (will be confirmed)	20 kg	25 kg	30 kg
PTIONS			
(will be confirmed) OPTIONS Colour	TM <sup>6</sup> Collection (150 Colours)		

Colour	TM <sup>6</sup> Collection (150 Colours)
Finish	[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.
Grip grooves	Supplied with grip grooves
Drainage	Supplied hidden drainage system






## TAVOLO TABLE TOPS

Item	Tavolo Table Tops			
Description	Luxury table tops			
Top thickness	6 mm	12 mm	20 mm	40-100 mm
Edges	[ Profiled ]	[ Profiled ]	[ Profiled ]	[Cladded] [ Metal Banding ]
Colours	<b>TM<sup>6</sup> (150 Colours)</b>	<b>TM<sup>12</sup></b> (40 Colours)	<b>TM<sup>20</sup></b> (15 Colours)	<b>TM<sup>6</sup></b> (150 Colours)


### TABLE TOP MODEL MAXIMUM DIMENSIONS

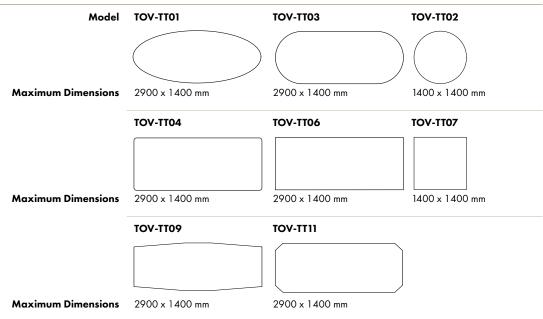

NOW Imagine

#### 6, 12 AND 20 mm THICKNESS TABLE TOP PROFILES


6 mm, 12 mm and 20 mm thickness table tops can be supplied with the following edge profile:

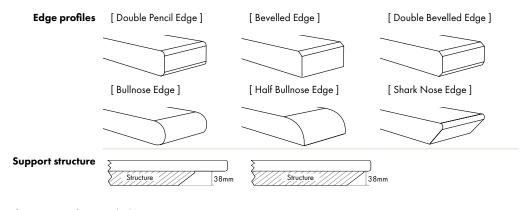

Wood structure colour Black

#### 40 - 100 mm THICKNESS TABLE TOP PROFILES


Table tops with 40 - 100 mm thickness are available with a choice of two edge profile options. Either with their edge profile clad with tile or with metal banding. When cladded with tile it comes with a 100 mm Mitred Apron Return.

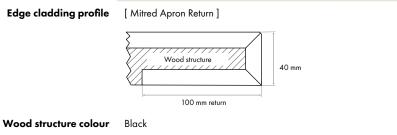

40 - 100 mm thickness table tops are specified with metal banding around their edge. This metal banding is available in a choice of six colours.

Metal banding	[ 90° Metal Banding ]		
	Wood structure	40 - 100 mm Metal Banding	
Banding colour	[ Brushed Copper ][ Brushed Bronze ][ Brushed Gold ] [ Brushed Inox ][ Satin Black ][ Decorative Bronze ]		



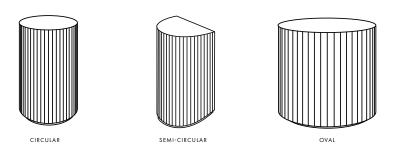

# TAVOLO PEDESTAL BASE

ltem	TOV-BP101 Ellipse Pedestal Bas	se	
Description	Ellipse pedestal base with strip of	decoration	
Model	TOV-BP101		
Colour	TM <sup>6</sup> Collection (150 Colours)	Wood Strip D	Decor (6 Colours)
Shape	[ Circular ][ Semi-circular ][ Ovo	al ]	
Notes	Coffee tables are typically 250 - 400 mm in height. Side tables are 600 mm. The standard height of a dining table is 760 mm. And console tables are often 900 mm high. The thickness of your table top will also affect the required leg height, therefore our pedestal legs are designed with a height variation of up to 5 cm to ensure when paired with a Tavolo Table top, they achieve the table height specified.		
Table Height	[ 200 - 1200 mm ]		
	Circular	Semicircular	Oval
Diameter	300 - 500 mm	300 - 500 mm	Minor diameter 300 - 500mm Major diameter 600-1000mm
BASE SPECIFICATION			
Wood decor styles			
	<u> </u>		
	Decor Style 1	Decor Style 2	Decor Style 3
			<u></u>
	Decor Style 4	Decor Style 5	Decor Style 6
Wood decor colours	American Walnut	Oak	Ebony


V.23.193

Black Grey Satin - RAL 7021

Silk Grey Satin - RAL 7044


Jet Black Satin - RAL 9005

NOW Imagine

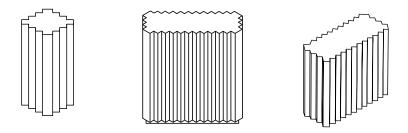

## TAVOLO PEDESTAL BASE CONT...


ltem	TOV-BP201 Rectangular Pedestal Base		
Description	Rectangular pedestal base with Greca decoration		
Model	TOV-BP201		
Colour	TM <sup>6</sup> Collection (150 Col	ours)	
Notes	Coffee tables are typically 250 - 400 mm in height. Side tables are 600 mm. The standard height of a dining table is 760 mm. And console tables are often 900 mm high. The thickness of your table top will also affect the required leg height, therefore our pedestal legs are designed with a height variation of up to 5 cm to ensure when paired with a Tavolo Table top, they achieve the table height specified.		
Dimensions (mm	Width: 200-1200 Depth: 200-1200		
Table Height	[ 200 - 1200 mm ]		
	Square	Rectangular	
Top view			
Side view			

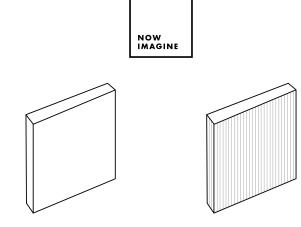

# TAVOLO PEDESTAL BASE CONT...


ltem	TOV-BP301 Rectangular Pedestal Base		
Description	Rectangular pedestal base with fluted decoration		
Model	TOV-BP301		
Fluted Decoration	The pedestal base on this page can be specified with or without fluted decoration. Fluted decoration is available in flute widths: [ 20 mm ][ 25 mm ]		
Colour	TM <sup>6</sup> Collection (150 Colours)		
Notes	Coffee tables are typically 250 - 400 mm in height. Side tables are 600 mm. The standard height of a dining table is 760 mm. And console tables are often 900 mm high. The thickness of your table top will also affect the required leg height, therefore our pedestal legs are designed with a height variation of up to 5 cm to ensure when paired with a Tavolo Table top, they achieve the table height specified.		
Dimensions (mm)	Width: 200-1200 Depth: 50-1200		
Table height	[ 250 mm ][ 400 mm ][ 600 mm ][ 760 mm ][ 900 mm ]		
	Non-fluted	Fluted	
Top view			
Side view			







Item	Podium
Description	Four and six sided plinth
<b>Dimensions (mm)</b> (tolerance ±2 mm)	Height (H): 150-1200 Width (W): 200-500 Depth (D): 200-500
<b>Approximate weight</b> (will be confirmed)	20 - 40 kg
OPTIONS	
Orientation	[ Vertical ][ Horizontal ]
Colour	TM <sup>6</sup> Collection (150 Colours)
Finish	[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour.

# TOP PLATE CONFIGURATION

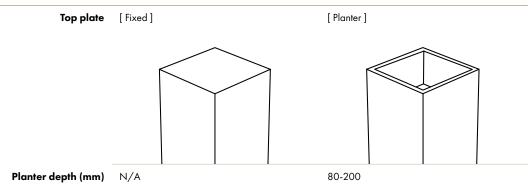


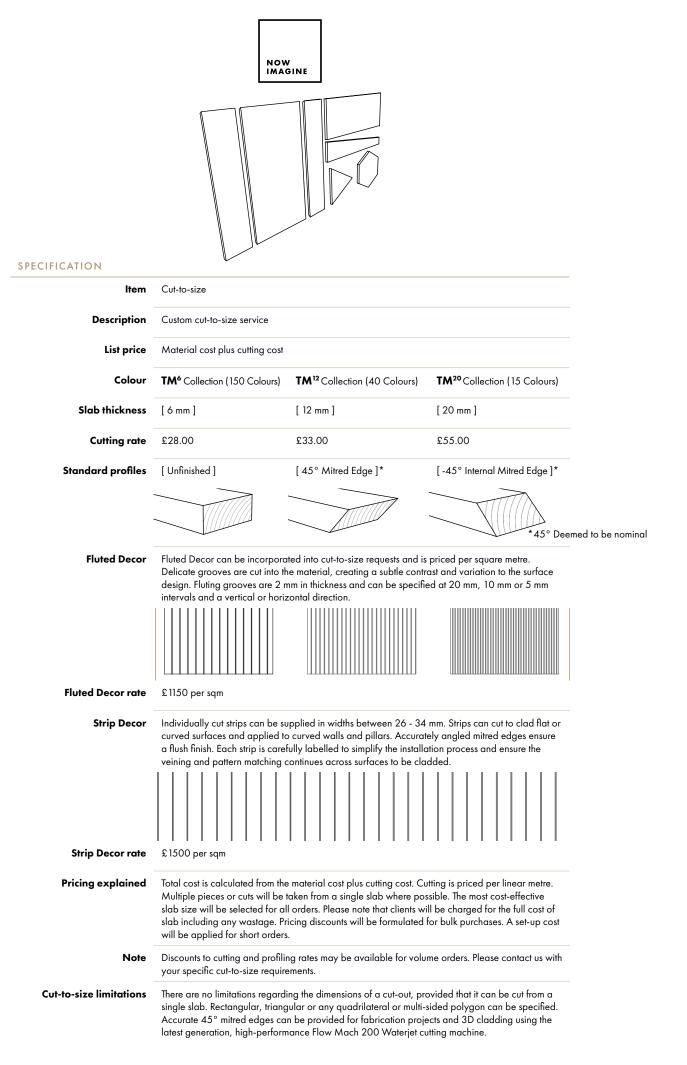

V.23.193

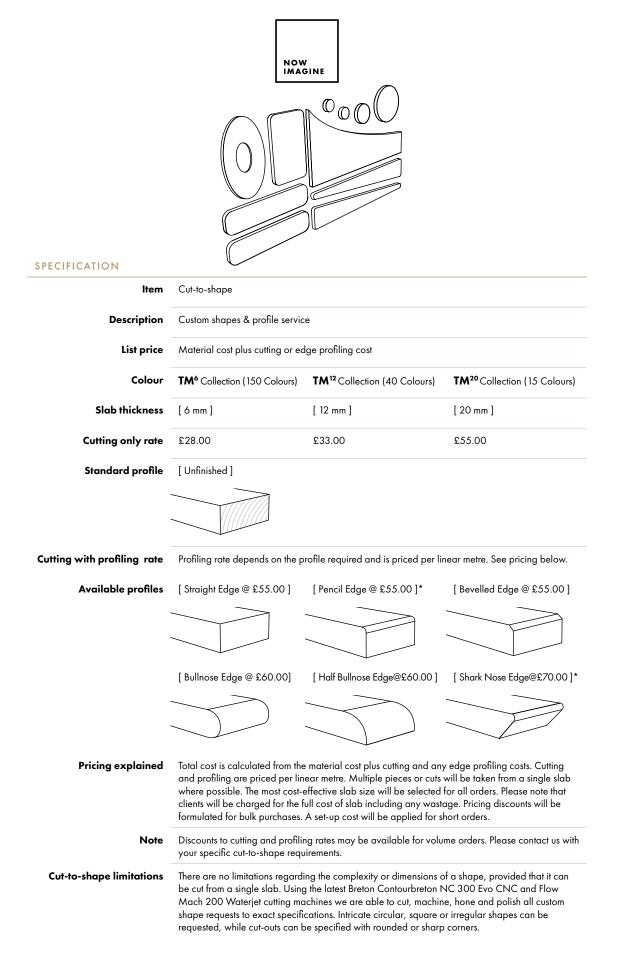


\*Not available in TM<sup>6</sup>

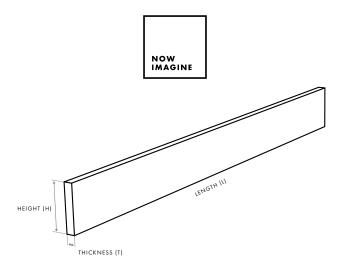


ltem	Skirting
Description	Skirting board
Colour	TM <sup>6</sup> Collection (150 Colours)
Length (mm)	∞
Finish	[Natural ][Polished ][Honed ] Availability dependant on chosen surface colour & depth.
Thickness	[ 6 mm ]

## SKIRTING CONFIGURATION

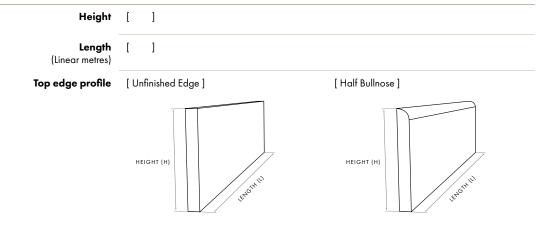




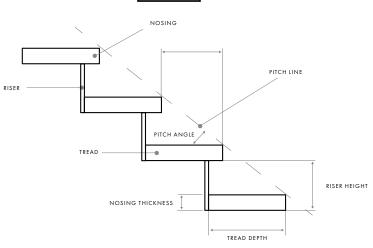

Item	Nosing Steps
Description	Configurable tread nosing
Colour	Choose from <b>TM<sup>6</sup></b> , <b>TM<sup>12</sup></b> , <b>TM<sup>20</sup> or TM<sup>GRIP</sup></b> Collections
Finish	[Natural ][Polished ][Honed ][Grip ] Availability dependant on chosen surface colour.
Dimensions	[ Tread Width ][ Tread Depth ][ Riser Height ]
Riser	[ Required ][ Not required ]
LED Channel / Shadow Gap Channel	[ Not Required ][ LED Channel ][ Shadow Gap Channel ]
Anti-slip grooves	[0][1][2][3][4]
Drip groove	[ Required ][ Not required ]
Number of steps	[]

SPECIFICATION

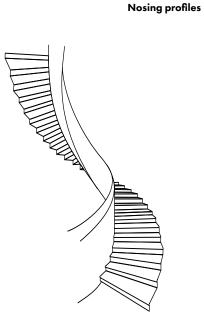

Bullnose (12mm or 20mm)	Half bullnose (12mm or 20mm)	Polished straight edge (12mm or 20mm)	Mitred apron return nosing (6mm, 12mm or 20mm)
Double half bullnose nosing (6mm, 12mm or 20mm)	Mitred apron nosing	L shape half bullnose	L shape mitred apron
(,	(6mm, 12mm or 20mm)	(6mm, 12mm or 20mm)	(6mm, 12mm or 20mm)
	(omm, 12mm or 20mm)	(6mm, 12mm or 20mm)	(omm, 12mm or 20mm)

Configure steps with one of the nosing options above All steps can be supplied with risers. Note "L shape half bullnose" and "L shape mitred apron" come with full risers as standard.

NOW Imagine

## COMPOSITE STRUCTURE

Wall-mounted basins	Wall-mounted basins are manufactured with a water-resistant and durable core. This structure is then expertly cladded with the selected surface and bonded with durable adhesives and Epoxy resins. The wall-hung unit is attached to the supporting wall with the supplied fixings brackets and the waste system can be accessed from below the item. We do not supply fixing screws, bolts, waste traps, tap connectors or any plumbing components.
Free-standing basins	Free-standing basins are constructed with a marine-grade plywood core and feature a removable panel for accessing the waste system. Depending on the installation location this access panel can be specified on the rear or on the side of the basin. The access panel is secured with magnetic fastenings. Finally the base incorporates a concealed 'shadow gap' for manoeuvring the item once plumbed in. Some of the basins are offered with a configurable sink base. This base can be fixed, sloping or removable. With the fixed base sink the waste is visible. The sloping base option is fixed and water flows into a thin channel opening at the bottom edge, and then into a hidden waste. A small removable strip provides access for cleaning. On some models the direction of this slope is configurable. The removable base can be removed for cleaning and water flows through channels around the parameter of the base, into a fixed base sink and visible waste system.
Basin waste	Water flows into a pre-installed 1 1/4" unslotted click clack basin waste. If this waste is visible it can be specified with a chrome, black or brass finish, otherwise we supply a premium chrome waste.
Wall-hung vanity tops & shelving	Wall-hung vanity tops and shelving are constructed with a wood core. In the case of bathroom vanity tops this will be water-resistant marine-grade plywood. Fixing plugs are provided for secure wall-hanging. This structure is then cladded with the selected surface and bonded with durable adhesives and Epoxy resins. Edges are formed with accurate mitred joints.
Vanity tops with cut-outs	Vanity tops with cut-outs are constructed with a water-resistant and durable core. This structure is then cladded with the selected surface and bonded with durable adhesives and Epoxy resins. The structured edges are formed with accurate mitred joints.
Kitchen countertops	Kitchen countertops are made with porcelain surfaces from our TM <sup>6</sup> , TM <sup>12</sup> and TM <sup>20</sup> Collections. These innovative materials have been engineered particularly for the rigours of the kitchen environment. Cut-outs for basins, taps or hobs can be cut and draining grooves can be machined with high-precision CNC machine. Solid worktops with a thickness of 12 or 20 mm are available and can be specified with a choice of edge profiles. Standard countertops, islands and waterfall islands are constructed with an apron edge. All countertops require level and secure support every 600 mm, around the perimeter frame, under any joints and around cut-outs.
Wall-hung breakfast bars & kitchen shelving	Wall-hung breakfast bars and kitchen shelving are constructed with a wood structural core. Fixing plugs are provided for secure wall-hanging. This structure is then cladded with the selected surface and bonded with durable adhesives and Epoxy resins. Edges are formed with accurate mitred joints. Two options are available for the angle of the front face of the breakfast bar or shelving.
Seating and plinths	Seating and plinths incorporate a wooden frame which is clad with Italian porcelain and edges are formed with accurate mitred joints.

NOW Imagine

## ADDITIONAL INFORMATION

Liability	Please note that we cannot be held responsible for the structural and plumbing aspects of installation. We therefore accept no liability for damage to the item during installation. We strongly recommend choosing a reputable and qualified professional for installation of this item. Two people may be required to safely handle and install this item.
Preparation	<ul> <li>Due to the considerable weight of items, when wall-mounting the wall or support structure to which it will be fixed must be checked and verified by a structural engineer. The installation should only commence once supporting walls meet the necessary standards.</li> </ul>
	<ul> <li>When wall-mounting ensure that all electrical works, wall plumbing and pipe works have been carried out prior to installation.</li> </ul>
	• Only once the fixing brackets have been securely mounted, should tiles be fixed to the wall.
Fixings & plumbing	Due to the countless fixing options and wall types used within building works, we do not supply fixing screws, bolts, waste traps, tap connectors or any plumbing components with our items.
	<ul> <li>If your item is to be wall-mounted, two or more wall fixing brackets will be supplied depending on the length of the item.</li> </ul>
	<ul> <li>If fixing screws are required for this item, the specification for these fixings will be documented in the technical drawing supplied.</li> </ul>
	<ul> <li>Floor standing basins are supplied with a removable panel for accessing the waste system.</li> <li>Depending on the installation requirements this panel can be on the rear or side of the basin.</li> </ul>
	<ul> <li>All basins are supplied with a pre-installed 1 <sup>1</sup>/4" basin waste sealed with silicon. If this waste is visible it will feature an unslotted click clack waste system which can be specified with a chrome, black or brass finish. Details will be documented in the supplied technical drawing.</li> </ul>
	<ul> <li>For fixed base and hidden waste basins, water flows through a thin channel into an unseen INOX steel sink bowl and waste system, accessible from underneath the item.</li> </ul>
Basin position	When deciding on the location of basins and taps, ensure to take into account the thickness of the sink and tap fixings to ensure adequate clearance. Typically basins and vanity tops should be installed at a height of 85 cm. Consider a distance of 100-120 mm between the wall-mounted taps and the basin.
Taps	Please note that we do not supply taps. If the tap configuration specified is deck-mounted, the item will come with pre-drilled tap holes to the spacing specifications provided during the order process. We provide a standard diameter of 35 mm for all tap holes; however we can cut these to any size in order to accommodate your individual needs. There are many different sizes available on the market so please consult tap manufacturer's specification.
NOTES	
Order process	Clients are encouraged to discuss their project with our consultants. We have a highly trained team of architects, engineers and account managers who will provide assistance through the entire process. This includes documenting your design, configuring options, confirming sizes and arranging delivery. Once the technical requirements for the project have been documented, our CAD technicians will prepare a technical drawing of the item for your signed approval. As soon as approval has been received and payment has been arranged, manufacturing will commence at our UK manufacturing facility.
Lead time	Lead time depends entirely on the type of service requested. Cut-to-size and cut-to-shape services have a lead time of 1-4 weeks. Countertops are 4-6 weeks, while bespoke basins, furniture and other fabricated items have a lead time of 6-10 weeks from payment confirmation and receipt of signed technical drawing.
Delivery & packaging	Delivery & packaging cost will depend on the size and weight of the item and delivery postcode. The final cost will be communicated during your order confirmation. Each item will be suitably packaged to ensure safe delivery. Rigid enclosures ensure that stress and flex is not transferred to the item during transport.
Templating	For accurate templating of countertops and work surfaces we provide an on-site laser templating service. Laser templating measures key points and contours within the kitchen layout and this information is then fed back to our studio. Here it is processed into the data required to communicate with our state-of-the-art cutting and profiling machines, enabling them to shape each worktop with the highest level of accuracy. Successful templating produces an extremely accurate worktop, eliminating costs associated with reworks and significantly reducing time spent on installation. Laser templating carries an additional cost.
Disclaimer	Please note that while every effort will be made to supply goods to the size and colour specified, due to the handmade nature of these items, slight variations may occur. We adhere to a dimensional tolerance limit of ±0.3%. It is also impossible to choose a specific graphical face or area of the tile and its location within the item. Where sizes are specified by the customer these are assumed to be the total dimensions to be made including any fixtures or fittings. © All rights reserved. V.23. 193



# PORCELAIN TILES

020 3141 3337 enquiry@porcelaintiles.co.uk

North London Showroom 23 Temple Fortune Parade Finchley Road London NW 11 OQS South London Showroom 88 High Street Wimbledon London SW19 5EG