Uno

Stone Collection

PORCELAINTILES



Uno Stone Collection




Uno Light Grey

Colours

COLOUR	FINISH	SIZE(MM)
Light Grey	Polished	1000 X 1000 X 14
Light Grey	Polished	600 X 600 X 10
Light Grey	Polished	300 X 600 X 10

Size Guide (mm)

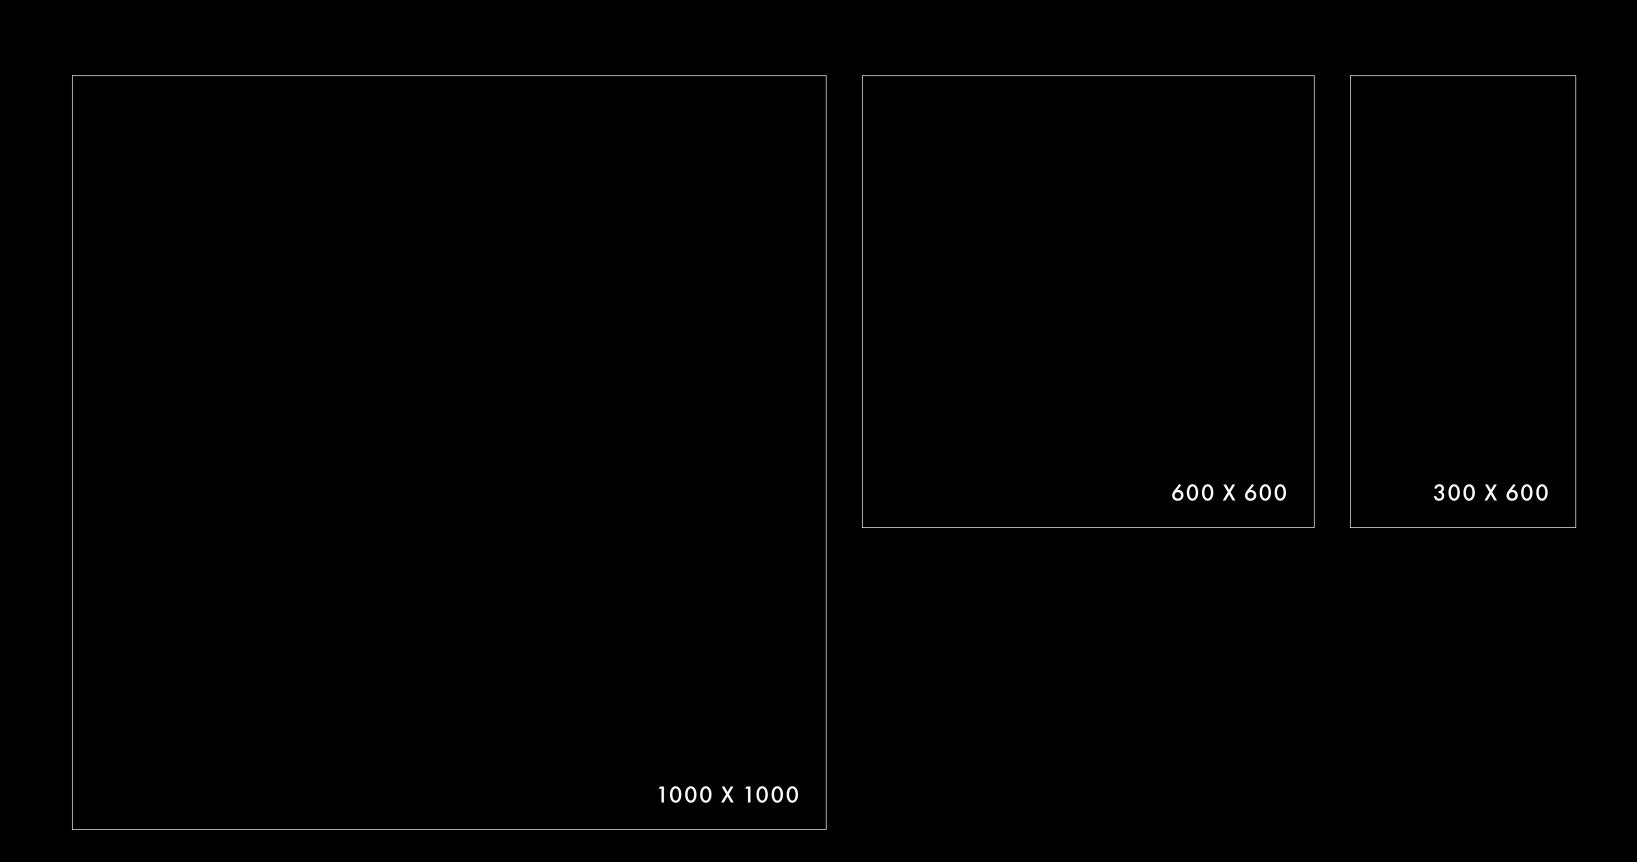

Technical Details

TECHNICAL DATA	STANDARD	REQUIREMENT	COLLECTION VALUE
Sides	EN ISO 10545-2	± 0.6% Max	Conforms
Thickness	EN ISO 10545-2	± 5.0% Max	Conforms
Straightness Of Sides	EN ISO 10545-2	± 0.5% Max	Conforms
Rectangularity	EN ISO 10545-2	± 0.6% Max	Conforms
Surface Flatness	EN ISO 10545-2	± 0.5% Max	Conforms
Water Absorption	EN ISO 10545-3	< 0.5% Max	Conforms
Bending Resistance	EN ISO 10545-5	$\geq 35 \text{ N/Mm}^2$	Conforms
Abrasion Resistance	EN ISO 10545-6	≤ 175 m m ³	Conforms
Coefficient Of Linear Thermal Expansion	EN ISO 10545-8	< 9 MK-1	Conforms
Thermal Shock Resistance	EN ISO 10545-9	No Visible Defects	Conforms
Frost Resistance	EN ISO 10454-12	No Visible Defects Or Cracks	Conforms
Chemical Resistance	EN ISO 10545-13	No Visible Changes To Surface	Conforms
Stain Resistance	EN ISO 10545-14	No Permanent Staining	Conforms
Slip Resistance	DIN 51130 RAMP TEST	N/A	If Applicable



PORCELAIN TILES

North London Showroom
23 Temple Fortune Parade
Finchley Road
London NW11 0QS
020 8731 6787

South London Showroom

88 High Street Wimbledon

London SW19 5EG

020 3141 3337

www.porcelaintiles.co.uk

enquiry@porcelaintiles.co.uk

The information printed in this brochure is as accurate as possible at the time of printing, but should not be considered as legally binding. The company reserves the right to modify, change, or cancel the content of this brochure without prior notice. The technical details mentioned cancel and replace the ones reported previously and where dimensions or sizes are specified, they shall be deemed to be nominal. The images, colours and finishes featured are for illustrative purposes only and may feature products that are not currently available. ©Porcelain Tiles Ltd – All rights reserved. V.19.106